THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-38999.

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

Form Approved
OMB No. 0704-0188

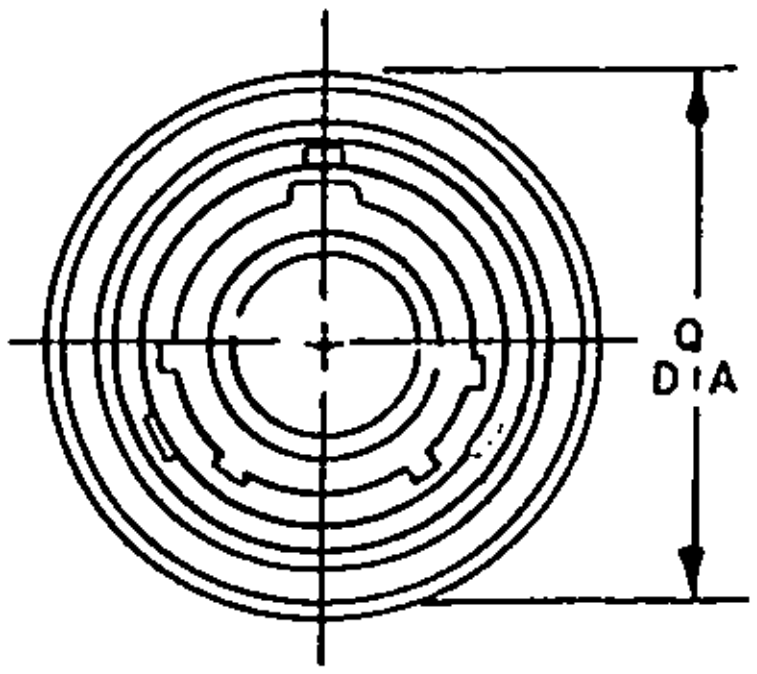

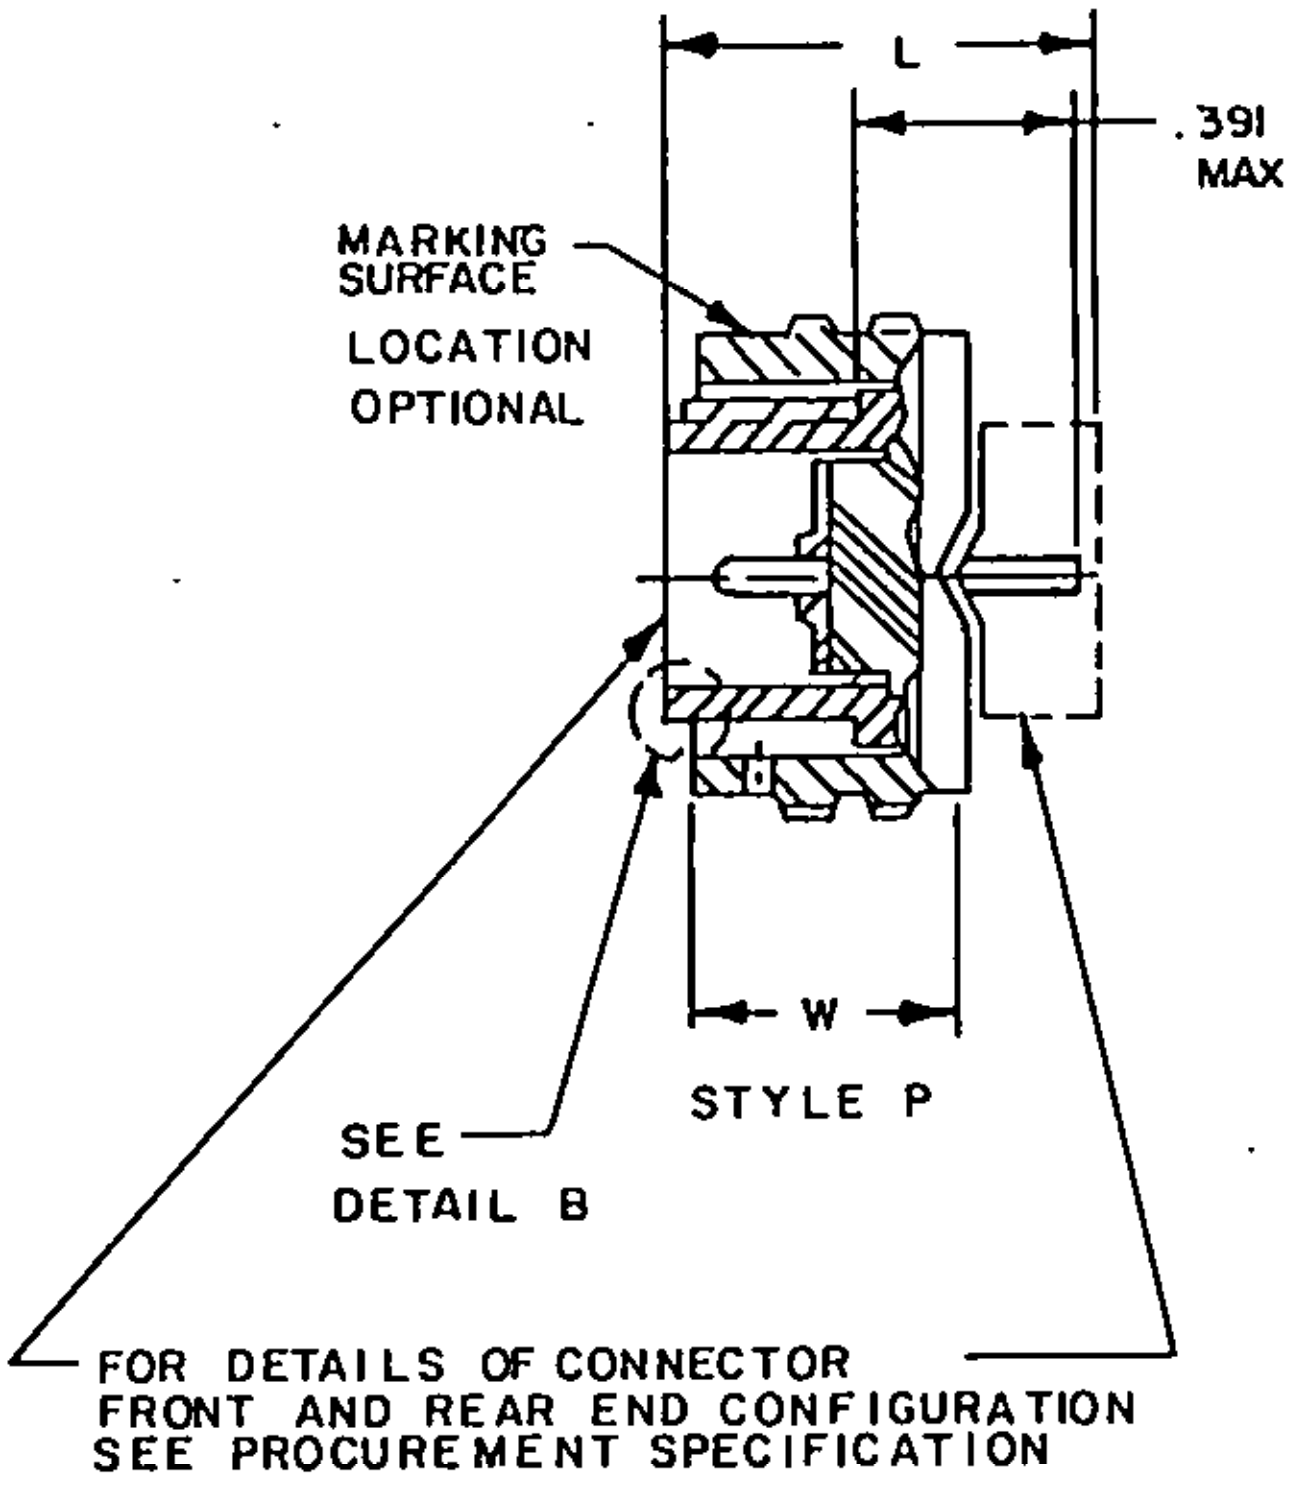
L
.391
MAX
MARKING SURFACE
LOCATION OPTIONAL
W
STYLE P
SEE DETAIL B
FOR DETAILS OF CONNECTOR FRONT AND REAR END CONFIGURATION SEE PROCUREMENT SPECIFICATION

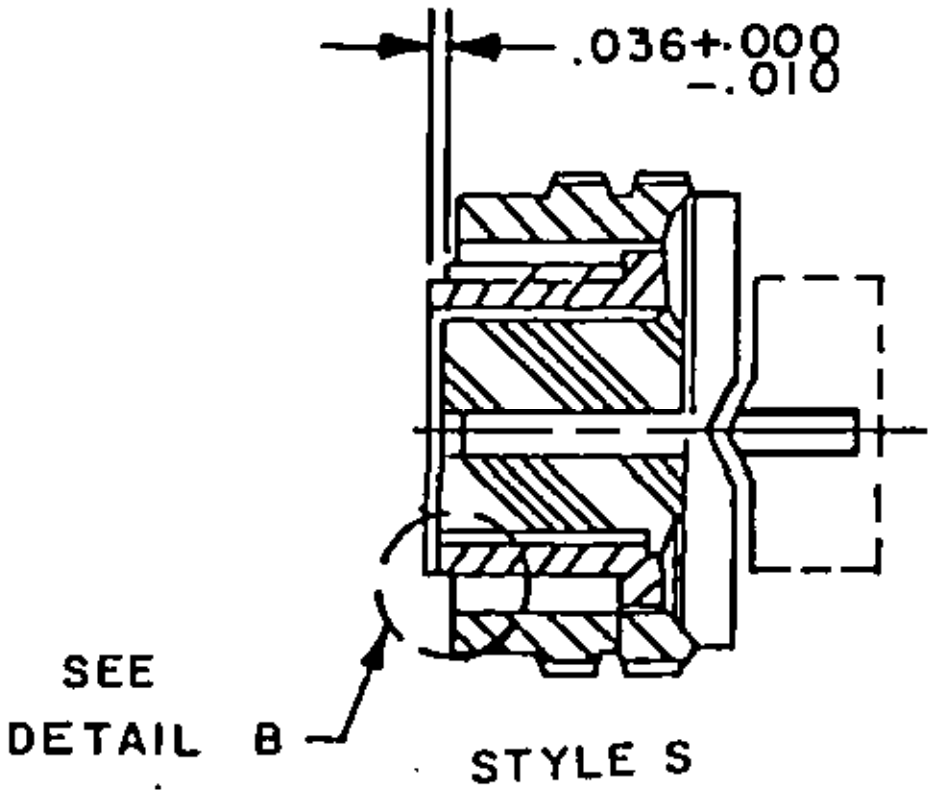



DETAIL B
ALTERNATE SHELL
DESIGN

EXAMPLE OF PART NUMBER

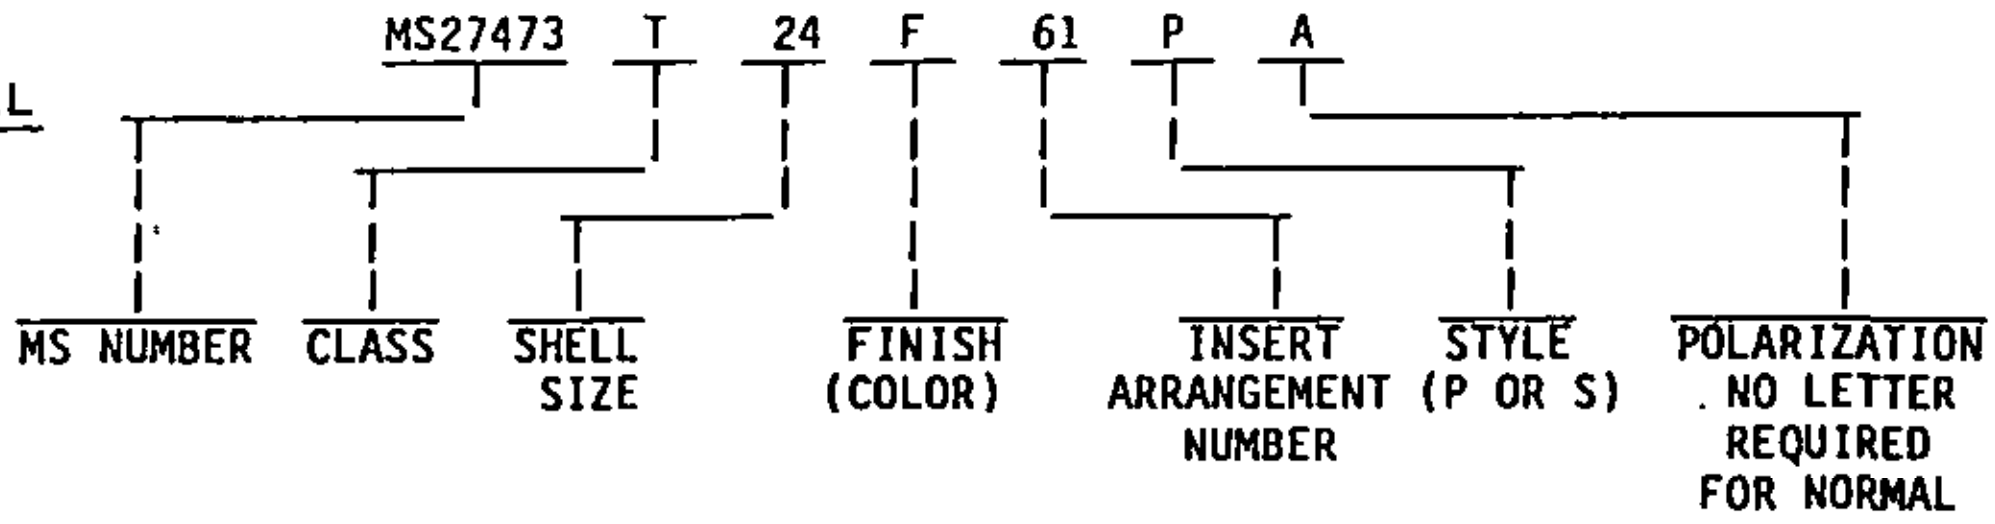

CLASSES E (see note 1), P (see note 2), and T.

NOTES:

1. Class E inactive for new design.
2. Class P inactive for new design for Air Force.

Ⓛ denotes changes

PREPARING ACTIVITY: Air Force - 85 **CUSTODIANS: ARMY -** CR **NAVY -** AS **AIR FORCE -** 85 **DLA -** **REVIEW:** Navy - EC, MC, OS Air Force-11,15,17,99 **USER:** Army-AR,MI; DLA-ES **PROJECT NUMBER:** 5935-3755	**MILITARY SPECIFICATION SHEET** **TITLE** CONNECTOR, PLUG, ELECTRICAL STRAIGHT, CRIMP TYPE, BAYONET COUPLING, SERIES II.	**SPECIFICATION SHEET NUMBER** **MS27473L** 26 July 1990 **SUPERSEDING** MS27473K 16 July 1984 **AMSC** N/A **FSC** 5935
DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.		**Page** 1 **of** 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.

DD Form 672, MAY 88

Previous editions are obsolete.

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-38999.

Form Approved
OMB No 0704-0188

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.13	.524	13.31	.844	21.44	1.143	29.03
.006	0.15	.547	13.89	.859	21.82	1.156	29.36
.010	0.25	.549	13.94	.893	22.68	1.268	32.21
.015	0.38	.575	14.61	.953	24.21	1.281	32.54
.036	0.91	.675	17.15	1.018	25.86	1.406	35.71
.316	8.03	.750	19.05	1.020	25.91	1.531	38.89
.391	9.93	.766	19.46	1.031	26.19	1.641	41.68
.436	11.07	.799	20.29	1.080	27.43	1.766	44.86

Ⓛ

Shell size	L max			Q max dia	R +.005 -.006 dia	W ±.015
	Class E	Class P (see note 7)	Class T (see note 8)			
8	1.026	1.020	.766	.750	.316	.547
10				.859	.436	
12				1.031	.549	
14				1.156	.675	
16				1.281	.799	
18				1.406	.893	
20				1.531	1.018	.524
22				1.641	1.143	
24	1.104	1.080	.844	1.766	1.268	.575

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. For main key polarization and key positions, see MIL-C-38999.
4. For design feature purposes, this standard takes precedence over documents referenced herein.
5. Referenced documents shall be of the issue in effect on date of invitation for bid.
6. Dimensioning and tolerances are in accordance with ANSI Y 14.5-1973.

Ⓛ 7. Applicable potting forms M85049/58 and M85049/75.
Ⓛ 8. To the end of the teeth.

PREPARING ACTIVITY: Air Force - 85
CUSTODIANS: ARMY - CR NAVY - AS
AIR FORCE - 85 DLA -
Navy - EC, MC, OS
REVIEW: Air Force-11,15,17,99
USER: Army-AR,MI; DLA-ES
PROJECT NUMBER: 5935-3755

MILITARY SPECIFICATION SHEET
TITLE CONNECTOR, PLUG, ELECTRICAL STRAIGHT, CRIMP TYPE, BAYONET COUPLING, SERIES II.

SPECIFICATION SHEET NUMBER
MS27473L
SUPERSEDING
MS27473K
AMSC N/A FSC 5935

DISTRIBUTION STATEMENT
A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.