THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(s) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THE ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION
MIL-S-83731

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense

Form Approved
OMB No 0704 0188

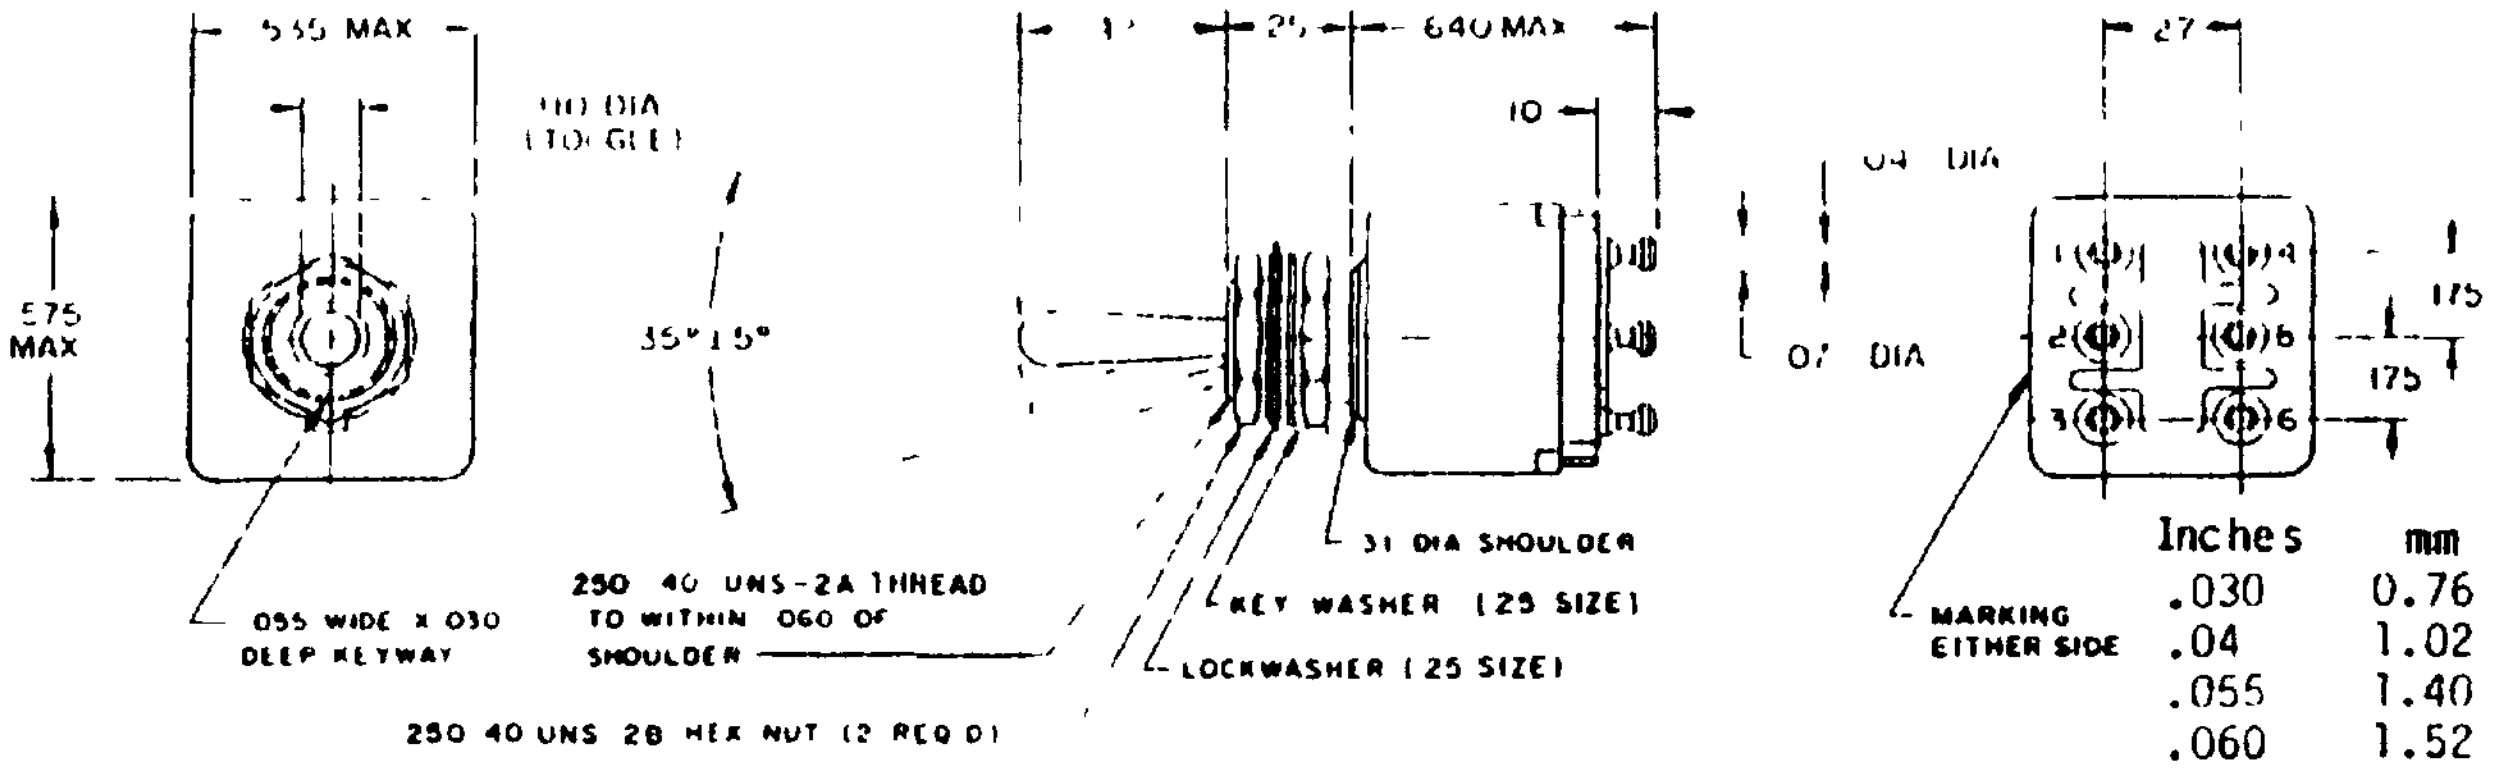

Inches	mm
.030	0.76
.04	1.02
.055	1.40
.060	1.52
.07	1.78
.10	2.5
.110	2.79
.175	4.45
.250	6.35
.25	6.4
.27	6.9
.31	7.9
.42	10.7
.535	13.59
.575	14.61
.640	16.26

NOTES

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.020 (0.51 mm) on two place decimals and ±.005 (0.13 mm) on three place decimals.
4. For hardware detail specifications, see supplement of MIL-S-83731
5. Configuration of switch case is optional provided maximum dimensions specified are not exceeded.

DETAIL REQUIREMENTS

CANCELED MS PART NUMBER 1/	SUBSTITUTE MS PART NUMBER 1/	CIRCUITS MADE WITH TOGGLE LEVER IN		
		KEYING SIDE 1-2 4-5	CENTER POSITION	OPPOSITE KEYING SIDE 2-3 5-6
MS27717-21	MS27717-21-1	ON	OFF	ON
-22	-22-1	OFF	NONE	ON
-23	-23-1	ON	NONE	ON
-26	-26-1	MOM-ON	NONE	ON
-27	-27-1	MOM-ON	OFF	MOM-ON
-31	-31-1	MOM-ON	OFF	ON

1/ The canceled part numbers are no longer procurable; the substitute part numbers have a lower dielectric withstanding voltage at reduced barometric pressure

NOTES

1. All switches on this standard are designed so that the movement of the switch mechanism is opposite to that of the toggle lever
2. Test voltage for dielectric withstanding voltage at reduced barometric pressure, shall be 400 V rms minimum.
3. Electrical endurance shall be performed for 30,000 cycles
4. Mechanical endurance shall be performed 50,000 cycles at -65°C and then 50,000 cycles at 85°C
5. Intermediate current shall be performed for 30,000 cycles.
6. Terminals shall be molded into the switch case and shall accommodate no. 18 awg wire.
7. Strength of actuating lever pivot and lever stop 8 lbs
8. Sand and dust: Toggle boots in accordance with MIL-B-5423 shall be used
9. Ⓔ Maximum weight shall be .020 lb
10. Electrical ratings for 28 volts dc and 115 volts ac at 400 Hz
    Lamp load = 1 ampere, resistive load = 5 amperes, inductive load = 2 amperes
11. In the event of a conflict between the text of this standard and the reference cited herein, the text of this standard shall take precedence
12. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this standard to the extent specified herein.

Ⓔ denotes changes

PREPARING ACTIVITY Air Force-85 CUSTODIANS ARMY ER NAVY EC AIR FORCE DLA REVIEW Army-AV Air Force-99 DLA ES USER PROJECT NUMBER 5930-1437	MILITARY SPECIFICATION SHEET TITLE SWITCH, TOGGLE, MINIATURE DOUBLE POLE, UNSEALED	SPECIFICATION SHEET NUMBER MS27717E 18 Jun 1990 SUPERSEDING MS27717D 20 May 1988 AMSC N/A FSC 5930
DISTRIBUTION STATEMENT A [illegible] unlimited		Page 1 of 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:48Z
Check the source to verify that this is the current version before use.