
FED. SUP CLASS
1660

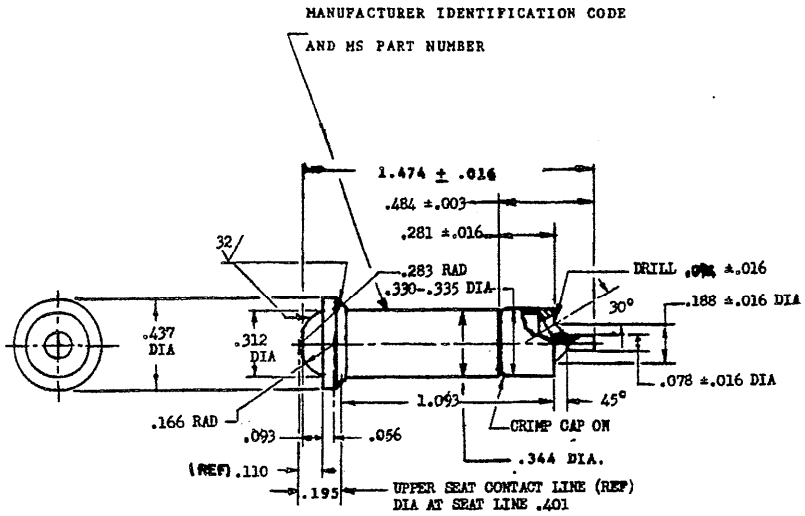

DASH NO.
-1

MATERIAL: BODY AND CAP, BRASS PER QQ-B-626, ALLOY 360, SOFT OR 1/2 HARD. SEE PROCUREMENT SPECIFICATION FOR FILTER MATERIAL.

FINISH: IN ACCORDANCE WITH ANSI-46.1; MAXIMUM ROUGHNESS ALL OVER EXCEPT AS OTHERWISE SPECIFIED, 63

DIMENSIONS IN INCHES: UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS $^{+}_{-}$ .005, ANGLES $^{+}_{-}$ 1°

FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 16 NOV 1965 · REVISED (A) 21 FEB 1973 (B) 30 JAN 1976 (C) MAY 8 1981 (D) 07 JAN 87

P.A. USAF-21 Other Coast AIRFORCE-99 Navy-AS Army-AV	TITLE CONTROLLER, OXYGEN FLOW EMERGENCY CYLINDER VALVE	MILITARY STANDARD MS29597
PROCUREMENT SPECIFICATION MIL-V-7560	SUPERSEDES: Figure 1 of MIL-C-25314	SHEET 1 OF 1

DD FORM 1 SEP 65 672-1 (Coordinated) EDITION OF 1 SEP 65 MAY BE USED. 1660-0563

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Review activities
Army-AV
Navy-AS
USAF-11

NOTES TO PRINTER: REDUCE BORDER TO 6-27/32x8-3/4. PRINT LEFT BORDER-LINE ONE INCH FROM LEFT EDGE OF 8x10-1/2 SHEET. PRINT BOTTOM BORDER LINE 3/8 INCH FROM BOTTOM EDGE OF 8x10-1/2 SHEET. SIGNATURE FORMS NOT TO BE INCLUDED ON 8x10-1/2 SHEET.

DRAWN BY [signature] DATE
TYPED BY
CHECKED BY [signature] 10/6/86

Source: https://assist.dla.mil -- Downloaded: 20260-23T17:03Z
Check the source to verify that this is the current version before use.