
FED. SUP CLASS
5935

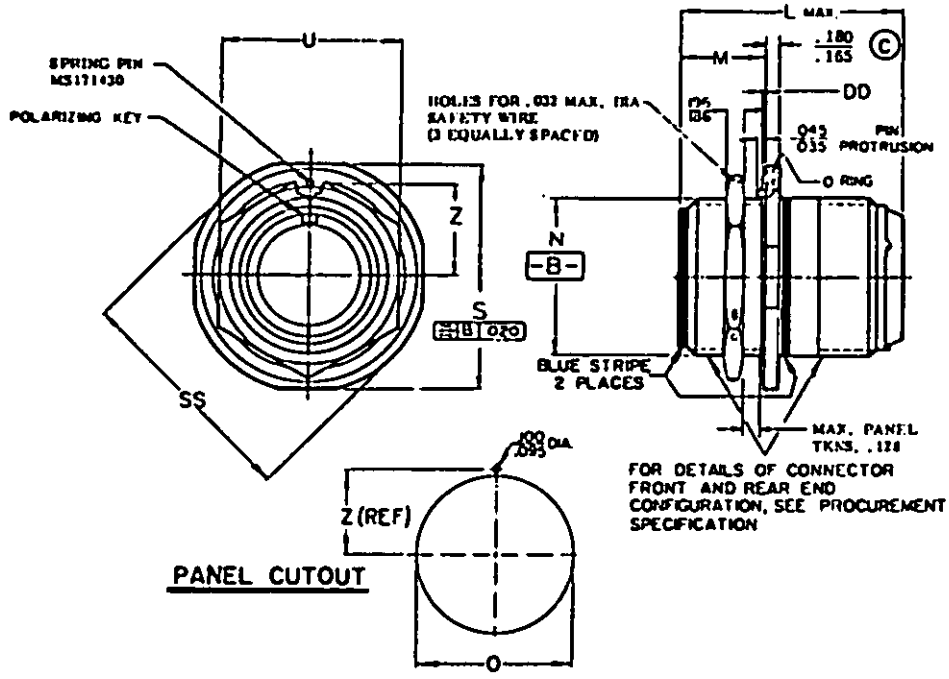

CLASSES L,U,&W ENVIRONMENT RESISTANT

CLASS K CANCELLED AFTER 5 APR 72.

NOTES:
1. DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ± .016.
2. DIMENSIONS AND TOLERANCING IN ACCORDANCE WITH ANSI Y14.5-1973
3. MIL-C-5015 FRONT AND REAR RELEASE CRIMP CONTACT, AND SOLDER CONTACT CONNECTORS ARE INTERMATEABLE.
4. UNLESS OTHERWISE SHOWN, CORRESPONDING FEATURES OF PIN AND SOCKET CONTACT CONNECTORS ARE IDENTICAL.
© 5. FOR INSERT ARRANGEMENTS SEE MIL-STD-1651.

© CLASS U INACTIVE FOR DESIGN AFTER 23 MAR 76
USE CLASS L FOR NEW DESIGN

EXAMPLE OF PART NO: MS3454L 28-21PX

MS3454 L - 28-21 P X

BASIC PART NO.	CLASS L,U,W	MATERIAL DESIGNATOR S-STAINLESS STEEL. LEAVE BLANK FOR ALUMINUM ALLOY, WROUGHT ALUMINUM AND FERROUS ALLOY	SHELL SIZE	INSERT ARRANGEMENT	CONTACT DESIGNATOR	ALTERNATE INSERT POSITION W,X,Y OR Z. LEAVE BLANK FOR NORMAL POSITION

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON THE DATE OF INVITATIONS FOR BID.

© FOR CHANGES SEE SHEETS 1 & 2

APPROVED OCTOBER 18 1971 REVISED © 23 MAR 76

This standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

User activities: Army, Navy, Air Force

Revis activities: Army AT, AV, ME, MI, MU
Navy EC
Air Force 11, 17, 80, 85

P.A	International interest	TITLE	MILITARY STANDARD
NAVY-AS Other Cust ARMY-EL AF-85		CONNECTORS, RECEPTACLE, ELECTRICAL, JAM NUT MOUNTING, REAR RELEASE © CRIMP CONTACT, AN TYPE	MS3454
Procurement Specification MIL-C-5015		SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 83 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PROJECT NO. 5935-1990-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

SIZE	L MAX. SIZE 16 & 12 CONT'S	L MAX. SIZE 8, 4, & 0 CONT'S	M ±.005	N +.000 −.005	S ±.005	SS ±.005	U ±.010
8S	2.031		.720	.500	1.187	1.272	.687
10S	↓		↓	.625	1.312	1.397	.812
10SL	↓		↓	.625	1.312	1.397	.812
12S	2.031		.720	.750	1.437	1.522	.937
12	2.175		.970	.750	1.437	1.522	.937
14S	2.031		.720	.875	1.562	1.647	1.125
14	2.175		.970	.875	1.562	1.647	1.125
16S	2.031		.720	1.000	1.687	1.772	1.250
16	2.175	2.500	.970	1.000	1.687	1.772	1.250
18	↓	↓	↓	1.125	1.812	1.897	1.375
20				1.250	1.937	2.022	1.500
22				1.375	2.156	2.241	1.625
24				1.500	2.281	2.366	1.750
28				1.750	2.531	2.616	2.000
32				2.000	2.781	2.866	2.375
36				2.250	3.031	3.116	2.625
40				2.500	3.281	3.366	2.875
44				2.750	3.656	3.741	3.125
48	2.175	2.500	.970	3.000	3.906	3.991	3.375

SIZE	O +.015 −.000	Z ±.005	DD ±.008 O RING PROJECT.	O RING SIZE A.R.P. 568 NO.
8S	.505	.323	.020	-020
10S	.630	.385	↓	-022
10SL	.630	.385		-022
12S	.755	.448		-024
12	.755	.448		-024
14S	.880	.510		-026
14	.880	.510		-026
16S	1.005	.573		-028
16	1.005	.573		-028
18	1.130	.635	↓	-029
20	1.255	.698	.020	-030
22	1.380	.760	.026	-132
24	1.505	.823	↓	-134
28	1.755	.948		-138
32	2.005	1.073		-142
36	2.255	1.198		-146
40	2.505	1.323		-150
44	2.755	1.448	↓	-152
48	3.005	1.573	.028	-153

Reviewer activities: Army AT, AV, ME, MI, MU
Navy EC
Air Force 11, 17, 80, 85

User activities: Army
Navy
Air Force

APPROVED OCTOBER 18 1971 REVISED © FOR CHANGES SEE SHEETS 1&2

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A NAVY-AS Other Cust ARMY-EL AF-85	International Interest	TITLE © CONNECTORS, RECEPTACLE, ELECTRICAL, JAM NUT MOUNTING, REAR RELEASE CRIMP CONTACT, AN TYPE	MILITARY STANDARD MS3454
Procurement Specification MIL-C-5015		SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.