
FED. SUP CLASS
2540

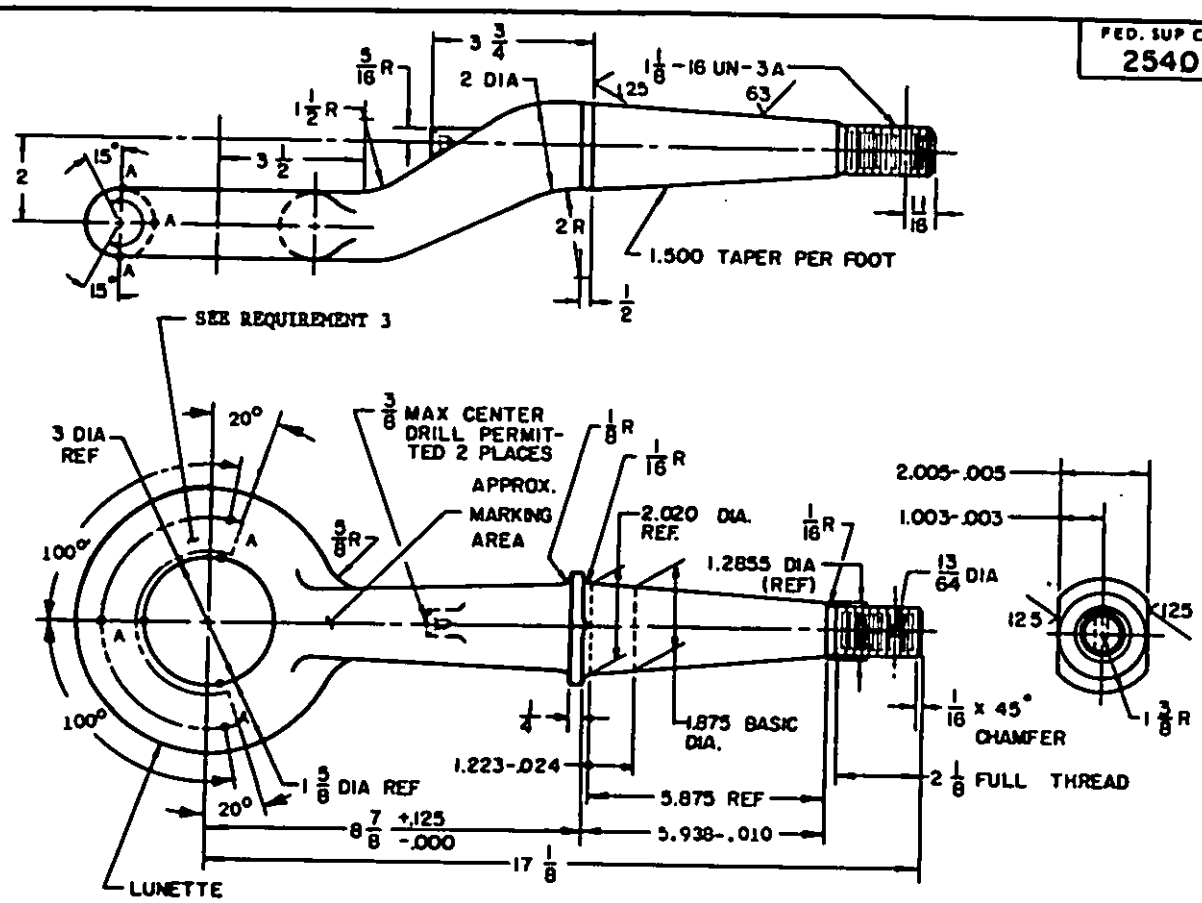

REQUIREMENTS:

1. MATERIAL: STEEL ALLOY FORGING, 4140H, 4340 PER MIL-S-46172, GRADE OPTIONAL. WAIVE MECHANICAL PROPERTIES REQUIREMENTS OF SPECIFICATION.
2. HEAT TREATMENT: QUENCH & TEMPER ROCKWELL HRC 28-32.
3. (M) SURFACE HARDEN AS SHOWN, 1/16 MIN TO 3/16 MAX DEPTH, IN ACCORDANCE WITH MIL-S-12515 (OPTIONAL HARDNESS PATTERN 360°). HARDNESS CHECKS TO BE MADE AT LOCATIONS MARKED "A" (9 PLACES). HARDNESS RANGE ROCKWELL HRC 48-52.
4. (M) FINAL FINISH: PHOSPHATE COAT, TYPE 1, TT-C-490; PRIME, TT-P-636; FOREST GREEN PER MIL-E-52798 OR MIL-E-52835.
5. REMOVE BURRS & SHARP EDGES.
6. (M) OPTIONAL MATERIAL: STEEL CASTING, SAND OR PRECISION, GRADE 150-135 (0.37% MIN CARBON), QQ-S-681. RADIOGRAPHIC INSPECTION IN ACCORDANCE WITH ASTM E142 AND TO THE FOLLOWING SEVERITY LEVELS PER ASTM E446:

CRITERION	SEVERITY LEVEL
GAS POROSITY	A-2
SAND AND INCLUSIONS	B-2
SHRINKAGE	
TYPE 1	CA-2
TYPE 2	CB-2
TYPE 3	CC-2
TYPE 4	CD-2
CRACKS	NOT ACCEPTABLE
HOT TEAR	NOT ACCEPTABLE
INTERNAL CHILL, UNFUSED CHAPLETS, INSERTS	NOT ACCEPTABLE

(M) DENOTES CHANGES

MS PART NO.	REF. DRAWING
MS 51339-3	11592597

APPROVED 9 JANUARY 1961 REVISED (P) 19 JULY 1975 (Q) 30 OCTOBER 1979 (M) 25 OCT 84

REVIEW ACTIVITIES: NAVY- MC; DLA-CS
USER ACTIVITIES: NAVY- YD; ARMY- MB

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. ARMY - AT Other Cust	TITLE COUPLER, DRAWBAR, RING: OFFSET (TAPER SHANK), 60,000 LB GVW	MILITARY STANDARD MS 51339
PROCUREMENT SPECIFICATION	SUPERSEDES: MS 51339 (ORD)	SHEET 1 OF 2

DD FORM 672-1 (Cancelled)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:50Z
Check the source to verify that this is the current version before use.

2540-0334

7. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES: TOLERANCES: ± 1/32 ON FRACTIONS; ± .005 ON DECIMALS; ± 5° ON ANGULAR DIMENSIONS.

8. SCREW THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/2.

9. MARKINGS SHALL CONSIST OF THE MS PART NUMBER AND THE MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.

NOTES:

1. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

2. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

3. APPLICABLE PROVISIONS OF ASCC AIR STD 11/8, STANAG 4101 AND QSTAG 264 ARE MARKED ♠.

4. THE USE OF RECYCLED MATERIALS WHICH MEET THE REQUIREMENTS OF THE APPLICABLE MATERIAL SPECIFICATIONS WITHOUT JEOPARDIZING THE INTENDED USE OF THE ITEM SHALL BE ENCOURAGED.

CERTAIN PROVISIONS OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENTS ASCC AIR STD 11/8, STANAG 4101, AND QSTAG 264. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

APPROVED 9 JAN. 1961 REVISED (H) SEE SHEET 1 FOR CHANGES

P.A. ARMY-AT Other Cust	TITLE COUPLER, DRAWBAR, RING: OFFSET (TAPER SHANK), 60,000 LB GVW	MILITARY STANDARD MS 51339
PROCUREMENT SPECIFICATION	SUPERSEDES: MS 51339 (ORD)	SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:59Z
Check the source to verify that this is the current version before use.