
FED SUP CLASS
5330

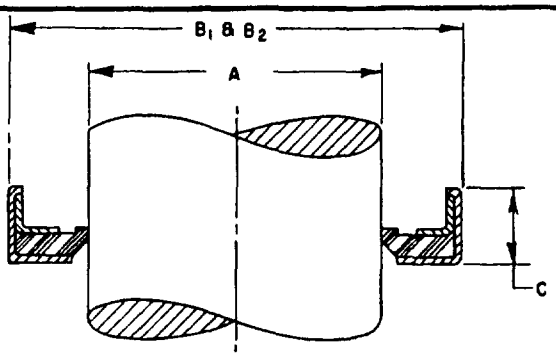

FIRST DASH NO (SIZE)	A SHAFT DIA (NOM)	B_1 SEAL O D (4)	B_2 HOUSING BORE (REF)	C WIDTH (6)
1	1/4	0.754	0.750	1/4
2	1/2	0.691	0 687	5/64
3	.554	0 813	0.809	7/32
4	7/8	1.250	1.246	1/4
5	7/8	1.314	1.310	1/4
6	1	1.252	1 248	3/32
7	1	1.441	1.437	5/16
8	1	1.504	1.500	1/4
9	1-3/16	2.002	1.998	1/4
10	1-1/4	1.504	1.500	3/32
11	1-1/4	1.756	1.752	1/4
12	1-3/8	1 878	1 874	1/4
13	1-3/8	2 441	2.437	15/32
14	1-9/16	2 690	2.686	3/8

FIRST DASH NO (SIZE)	A SHAFT DIA (NOM)	B_1 SEAL O D (4)	B_2 HOUSING BORE (REF)	C WIDTH (6)
15	1-23/32	2 718	2.714	23/64
16	1-3/4	2.730	2.726	1/2
17	1-3/4	2.754	2.750	31/64
18	1-15/16	3.004	3.000	1/4
19	1-15/16	3 160	3.155	1/4
20	2	3.001	2 997	1/4
21	2-1/8	2 879	2.875	1/4
22	2-1/4	3 317	3.312	3/8
23	2-31/32	4.008	4 003	1/4
24	3-1/2	4.756	4.751	1/4
25	4	5.378	5.373	3/4
26	4-11/16	6.005	6.000	1/4
27	6-3/16	7.508	7.502	1/4
28	6-15/32	7 257	7.251	1/4

REQUIREMENTS

1 THE ABOVE DESIGN IS FOR REFERENCE ONLY OTHER DESIGNS WHICH MEET THE FUNCTIONAL REQUIREMENTS OF THIS TYPE OF SEAL ARE ACCEPTABLE.

2 SEALING MEMBERS SHALL CONFORM TO ONE OF THE FOLLOWING CLASSES

CLASS 1 POLYMER-IMPREGNATED LEATHER OR CHROME RETANNED LEATHER IN ACCORDANCE WITH KK-L-164 TANNAGE III LEATHER SEALING MEMBER SHALL BE MOLD-PROOFED IN ACCORDANCE WITH O-L-164 (FOR NORMAL OPERATING TEMPERATURE)
CLASS 2. OIL RESISTANT SYNTHETIC ELASTOMER (FOR NORMAL OPERATING TEMPERATURE)
CLASS 3 OIL RESISTANT ELASTOMER IN ACCORDANCE WITH HIGH AND LOW TEMPERATURE TESTS OF MIL-S-45005 (FOR EXTREME OPERATING TEMPERATURE)

3 THE PART NUMBER SHALL CONSIST OF THE MS NUMBER AND 2 DASH NUMBERS
THE FIRST DASH NUMBER INDICATES THE PART SIZE
THE SECOND DASH NUMBER INDICATES THE CLASS
EXAMPLE MS51920-2-2 INDICATES SIZE NUMBER 2 WITH CLASS NUMBER 2 SEALING MEMBER

4 DIMENSIONS ARE IN INCHES TOLERANCES ARE + 002 FOR SEAL O D UP TO 2 000, + 003, - 002 FOR SEAL DIA UP TO 3 000, + 004, - 002 FOR SEAL O D UP TO 7 000, AND + 005, - 002 FOR SEAL O D UP TO 8 000, HOUSING BORE DIA ARE + 001 FOR BORE DIA UNDER 3 000, ± 0015 FOR BORE DIA 3 001 TO 7 000, AND ± 002 FOR BORE DIA 7 001 TO 12 000

5 MAXIMUM HOUSING FILLET 030 RADIUS FOR SEALS UNDER 1-5/8 OUTSIDE DIAMETER AND 040 RADIUS FOR SEALS OVER 1-5/8 OUTSIDE DIAMETER

6 WIDTH TOLERANCES FOR SEALS SHALL BE ± 015 FOR WIDTHS UP TO 4 00, AND ± .020 FOR WIDTHS OVER 4 00

NOTES

1 THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS, OR REFERENCED DOCUMENTS

2 FOR DESIGN PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN

3 REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS OR REQUEST FOR PROPOSALS, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED

4 MARKING SHALL CONSIST OF THE MS PART NUMBER AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130

5 THE USE OF RECYCLED MATERIALS WHICH MEET THE REQUIREMENTS OF THE APPLICABLE MATERIAL SPECIFICATION WITHOUT JEOPARDIZING THE INTENDED USE OF THE ITEM SHALL BE ENCOURAGED

(F) ENTIRE STANDARD REVISED

APPROVED 14 SEPT 1961 REVISED (F) 27 OCT 86

P A ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
		SEAL, PLAIN ENCASED: SINGLE SEALING MEMBER, EXTENDED CASE	MS51920
PROCUREMENT SPECIFICATION MIL-S-45005	SUPERSEDES: CLHX16		SHEET 1 OF 1

DD FORM 672-1 FULLY COORDINATED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5330-0676

USER ACTIVITIES ARMY-ME
REVIEWER ACTIVITIES ARMY-AR, MI

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense AMSC N/A
DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:13Z
Check the source to verify that this is the current version before use.