
FED. SUP CLASS
53GP

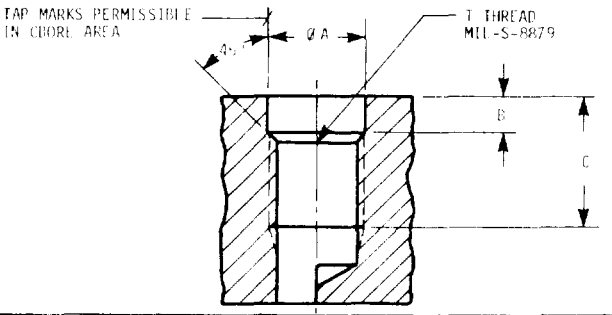

NOMINAL EXTERNAL THREAD SIZE OF INSERT AND STUD END THREAD SIZE OF STUD	INSERT DASH NUMBER MS51993 REF	INSERT DASH NUMBER MS51498 REF	STUD DASH NUMBER MS51992 REF	STUD DASH NUMBER MS51497 REF	T THREAD CLASS 3B INSERT AND STUD	ØA INSERT AND STUD +.005 -.000	B INSERT AND STUD +.015 -.000	C MIN FULL THREAD DEPTH INSERT MS51993	C MIN FULL THREAD DEPTH INSERT MS51498	C MIN FULL THREAD DEPTH STUD MS51992	C MIN FULL THREAD DEPTH STUD MS51497
.3125-18	----	----	-802	----	.3125-18UNJC	.328	.112	-----	----	.561	-----
.3125-24	----	----	-502 -642	----	.3125-24UNJF	.328	.112	-----	-----	.436 .483	-----
.3750-16	-803	----	-803	----	.3750-16UNJC	.390	.172	.588	-----	.723	-----
.3750-24	-503 -643	----	-503 -643	-502 -642 -802	.3750-24UNJF	.390	.172	.450 .498	-----	.536 .608	.436 .483 .561
.4375-14	-804	----	-804	----	.4375-14UNJC	.453	.151	.781	-----	.918	-----
.4375-20	-504 -644	-503 -643 -803	-504 -644	-503 -643 -803	.4375-20UNJF	.453	.151	.592 .666	.450 .498 .588	.677 .775	.536 .608 .723
.5000-13	-605	----	-805	----	.5000-13UNJC	.515	.174	.982	-----	1.126	-----
.5000-20	-505 -645	-504 -644 -804	-505 -645	-504 -644 -804	.5000-20UNJF	.515	.174	.728 .826	.592 .666 .781	.812 .943	.677 .775 .918
.6250-11	-806	----	-806	----	.6250-11UNJC	.625	.174	1.111	-----	1.206	-----
.6250-18	-506 -646	-505 -646 -805	-506 -646	-505 -645 -805	.6250-18UNJF	.625	.174	.800 .922	.728 .826 .982	.858 .998	.812 .943 1.126
.7500-10	-807	----	-807	----	.7500-10UNJC	.750	.178	1.206	-----	1.317	-----
.7500-16	-507 -647	-506 -646 -806	-507 -647	-506 -646 -806	.7500-16UNJF	.750	.178	.863 .998	.800 .922 1.111	.933 1.088	.858 .998 1.206
.8750-9	-808	----	-808	----	.8750-9UNJC	.875	.230	1.383	-----	1.706	-----
.8750-14	-508 -648	-507 -647 -807	-508 -648	-507 -647 -807	.8750-14UNJF	.875	.230	.998 1.151	.863 .998 1.205	1.203 1.414	.933 1.088 1.317
1.0000-12	----	-508 -648 -808	----	-508 -648 -808	1.0000-12UNJF	1.000	.230	-----	.998 1.151 1.383	-----	1.203 1.414 1.706

REQUIREMENTS:
1. Diameter "A" and minor diameter of thread to be concentric within .003 FIM.
2. Axis of hole to be normal to entry surface or provide spotface when required.
3. Unless otherwise specified machined surfaces to be 125 microinches in accordance with ANSI B46.1.
4. Remove all burrs and sharp edges.
5. Tolerances for linear dimension ±.005, angular dimensions ±5°.

NOTES:
1. Dimensions are in inches.
2. Procedure and installation of ring locked inserts, studs, and lockrings, see MS51995.
3. Nominal use: For installation of ring locked inserts and studs, high strength.
4. In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.
5. Referenced Government (or non-government) documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this standard to the extent specified herein.

THIS IS A DESIGN STANDARD. NOT TO BE USED AS A PART NUMBER.

Ⓐ ENTIRE STANDARD REVISED

APPROVED 12 DEC 67 REVISED Ⓐ 11 MAR 85

P. A.	AR	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust	AS		HOLE PREPARATION- RING LOCKED INSERTS AND STUDS, HIGH STRENGTH, STANDARD DIMENSIONS FOR	MS51996
	99			
PROCUREMENT SPECIFICATION: NONE		SUPERSEDES:		PAGE 1 OF 1

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 53GP-0148

User activities:
Army - MI
Navy - MC, OS

Review activities:
Army - AT, AV, ER, GL
Air Force - 11, 82
NSA - NS
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:16Z
Check the source to verify that this is the current version before use.