

FED SUP CLASS
5306



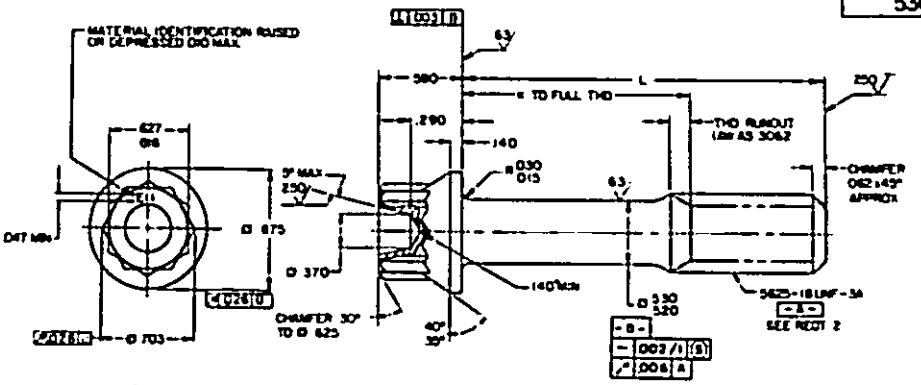

SECTION THRU THREAD PROFILE



OPTIONAL SHAPE OF HEAD

TABLE I DASH NUMBERS AND DIMENSIONS

DASH NO.	L	K +.000 -.060	APPROX WEIGHT LBS/100	DASH NO.	L	K +.000 -.060	APPROX WEIGHT LBS/100	DASH NO.	L	K +.000 -.060	APPROX WEIGHT LBS/100
-06	1.000	1/	11.91	-23	2.375	1.000	19.63	-40	4.500	3.125	31.62
-07	1.062	1/	12.26	-24	2.500	1.125	20.34	-41	4.625	3.250	32.32
-08	1.125	1/	12.61	-25	2.625	1.250	21.04	-42	4.750	3.375	33.03
-09	1.188	1/	12.96	-26	2.750	1.375	21.75	-43	4.875	3.500	33.73
-10	1.250	1/	13.31	-27	2.875	1.500	22.45	-44	5.000	3.625	34.44
-11	1.312	1/	13.66	-28	3.000	1.625	23.16	-45	5.125	3.750	35.14
-12	1.375	1/	14.01	-29	3.125	1.750	23.86	-46	5.250	3.875	35.85
-13	1.438	1/	14.36	-30	3.250	1.875	24.57	-47	5.375	4.000	36.55
-14	1.500	.125	14.71	-31	3.375	2.000	25.27	-48	5.500	4.125	37.26
-15	1.562	.188	15.06	-32	3.500	2.125	25.93	-49	5.625	4.250	37.96
-16	1.625	.250	15.41	-33	3.625	2.250	26.68	-50	5.750	4.375	38.67
-17	1.688	.312	15.76	-34	3.750	2.375	27.39	-51	5.875	4.500	39.37
-18	1.750	.375	16.11	-35	3.875	2.500	28.09	-52	6.000	4.625	40.08
-19	1.875	.500	16.81	-36	4.000	2.625	28.80				
-20	2.000	.625	17.51	-37	4.125	2.750	29.50				
-21	2.125	.750	18.21	-38	4.250	2.875	30.21				
-22	2.250	.875	18.93	-39	4.375	3.000	30.91				

1/ THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS.

INACTIVE FOR NEW DESIGN AFTER 26 OCT 72
NO SUPERSEDING STANDARD

REQUIREMENTS:

1. MATERIAL: STEEL AMS 6322
2. THREADS: THREADS IN ACCORDANCE WITH MIL-S-7742. INCOMPLETE THREADS NOT TO ENTER FILLET.
3. DIMENSIONS: 26-32 UNC
4. FINISH: BLACK OXIDE TREATMENT IN ACCORDANCE WITH AMS 2485
5. DIMENSIONING AND TOLERANCING: DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14.5M
6. MARKING CONFIGURATION: MARKING CONFIGURATION IN ACCORDANCE WITH AS 870.
7. SURFACE TEXTURE: SURFACE TEXTURE UNLESS OTHERWISE SPECIFIED, SHALL BE 125 MICROINCHES EXCEPT UPSET HEAD, IN ACCORDANCE WITH ANSI B46.1
8. MAGNETIC PARTICLE INSPECTION: MAGNETIC PARTICLE INSPECTION IN ACCORDANCE WITH AMS 2640

Ⓑ ENTIRE STANDARD REVISED

APPROVED 5 AUG 57 REVISED Ⓑ 22 JUN 87

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
NAVY-AS (Other Cust)		BOLT-MACHINE, STEEL, 12 POINT HEAD, .5625-18, BLACK OXIDE	MS9163(AS)
PROCUREMENT SPECIFICATION: AMS 7452	SUPERSEDES:		PAGE 1 OF 2

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5306-N159

USER ACTIVITIES:

REVIEWER ACTIVITIES: DLA-IS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Deviation for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:11Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5306

9. TOLERANCES: UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE FOR LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.

10. EDGES: BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.

11. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I.

EXAMPLE: MS9163-06

DASH NUMBER

BASIC MS NUMBER

MS9163-06 INDICATES: BOLT-MACHINE, STEEL, 12 POINT HEAD, .5625-18, BLACK OXIDE, 1.000 LONG

NOTES:

1. ALL DIMENSIONS ARE IN INCHES
2. DO NOT USE UNASSIGNED PART NUMBER
3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
4. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
5. THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION
6. AS AND AMS ARE SAE PUBLICATIONS

APPROVED 5 AUG 57 REVISED (B) FOR CHANGES SEE PAGES 1 AND 2

USER ACTIVITIES:

REVIEWER ACTIVITIES: DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
NAVY-AS Other Cust		BOLT-MACHINE, STEEL, 12 POINT HEAD, .5625-18, BLACK OXIDE	MS9163(AS)
PROCUREMENT SPECIFICATION AMS 7452	SUPERSEDES:		PAGE 2 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5306-N159

☆ U.S. GOVERNMENT PRINTING OFFICE: 1987 704-036/73903

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:11Z
Check the source to verify that this is the current version before use.