MS9566

FED. SUP CLASS
5306

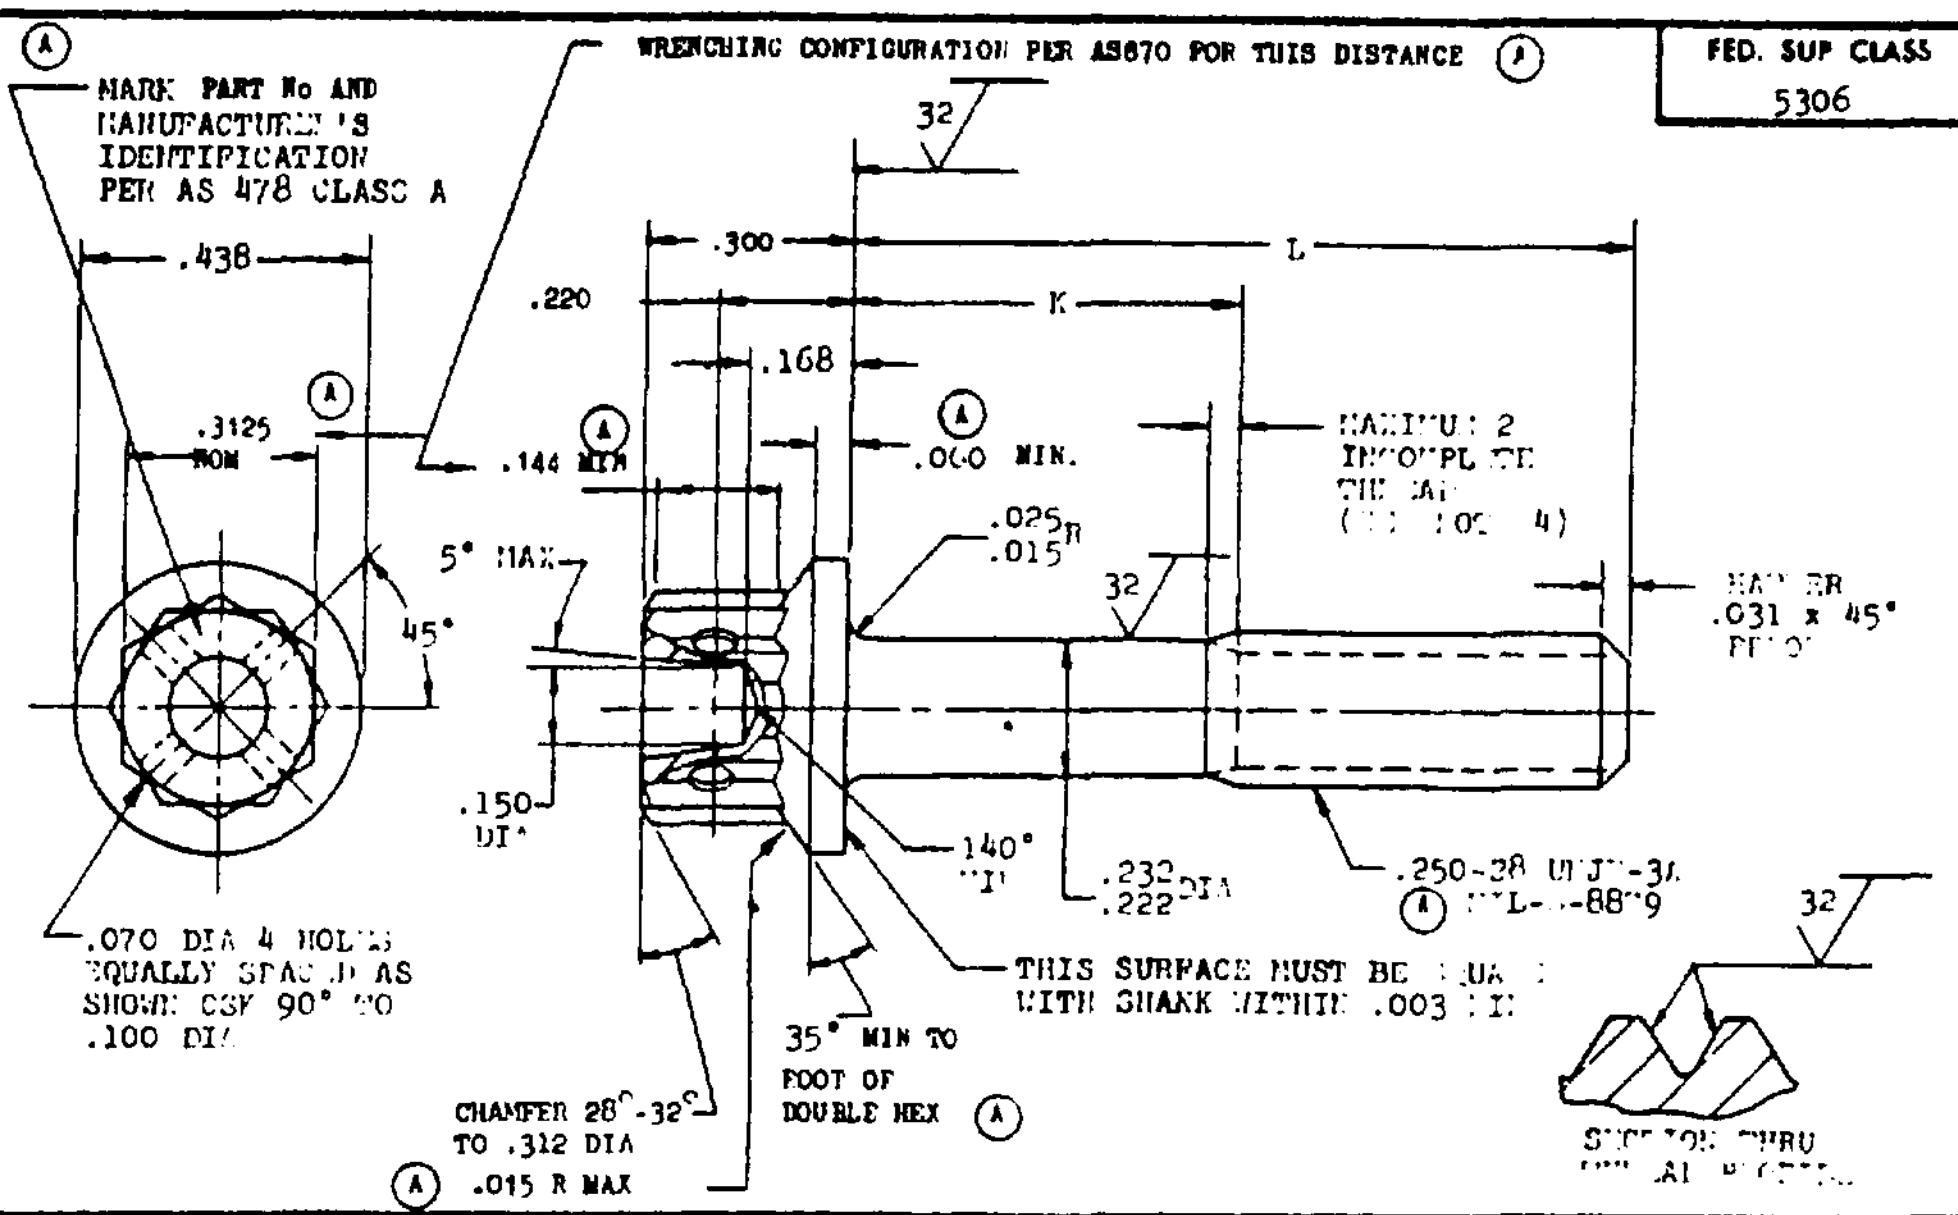
Ⓐ MARK PART No AND MANUFACTURER'S IDENTIFICATION PER AS 478 CLASS A
WRENCHING CONFIGURATION PER AS870 FOR THIS DISTANCE Ⓐ
32
.438
.3125 NOM
Ⓐ
.144 MIN Ⓐ
.220
.300
.168
L
K
Ⓐ .060 MIN.
MAXIMUM 2 INCOMPLETE THREADS (SEE NOTE 4)
.025 R .015
5° MAX
45°
32
CHAMFER .031 x 45°
.150 DIA
140°
.232 .222 DIA
.250-28 UNJF-3A Ⓐ MIL-S-8879
.070 DIA 4 HOLES EQUALLY SPACED AS SHOWN CSK 90° TO .100 DIA
THIS SURFACE MUST BE SQUARE WITH SHANK WITHIN .003 FIR
32
35° MIN TO FOOT OF DOUBLE HEX Ⓐ
CHAMFER 28°-32° TO .312 DIA
Ⓐ .015 R MAX
SECTION THRU

PART NO.	L	K	APPROX WEIGHT LB/100	PART NO.	L	K	APPROX WEIGHT LB/100	PART NO.	L	K	APPROX WEIGHT LB/100
MS9566-04	.375	.079- .099	1.14	MS9566-25	1.688	.878- .938	2.64	MS9566-46	4.250	3.440-3.500	5.56
MS9566-05	.438	.079- .099	1.21	MS9566-26	1.750	.940-1.000	2.72	MS9566-47	4.375	3.565-3.625	5.71
MS9566-06	.500	.079- .099	1.29	MS9566-27	1.875	1.065-1.125	2.86	MS9566-48	4.500	3.690-3.750	5.85
MS9566-07	.562	.079- .099	1.36	MS9566-28	2.000	1.190-1.250	3.00	MS9566-49	4.625	3.815-3.875	6.00
MS9566-08	.625	.079- .099	1.44	MS9566-29	2.125	1.315-1.375	3.14	MS9566-50	4.750	3.940-4.000	6.14
MS9566-09	.688	.079- .099	1.51	MS9566-30	2.250	1.440-1.500	3.29	MS9566-51	4.875	4.065-4.125	6.29
MS9566-10	.750	.079- .099	1.58	MS9566-31	2.375	1.565-1.625	3.43	MS9566-52	5.000	4.190-4.250	6.43
MS9566-11	.812	.079- .099	1.65	MS9566-32	2.500	1.690-1.750	3.57	MS9566-53	5.125	4.315-4.375	6.56
MS9566-12	.875	.079- .125	1.72	MS9566-33	2.625	1.815-1.875	3.71	MS9566-54	5.250	4.440-4.500	6.70
MS9566-13	.938	.128- .188	1.79	MS9566-34	2.750	1.940-2.000	3.85	MS9566-55	5.375	4.565-4.625	6.84
MS9566-14	1.000	.190- .250	1.86	MS9566-35	2.875	2.065-2.125	4.00	MS9566-56	5.500	4.690-4.750	6.99
MS9566-15	1.062	.252- .312	1.93	MS9566-36	3.000	2.190-2.250	4.14	MS9566-57	5.625	4.815-4.875	7.13
MS9566-16	1.125	.315- .375	2.00	MS9566-37	3.125	2.315-2.375	4.29	MS9566-58	5.750	4.940-5.000	7.28
MS9566-17	1.188	.378- .438	2.08	MS9566-38	3.250	2.440-2.500	4.43	MS9566-59	5.875	5.065-5.125	7.42
MS9566-18	1.250	.440- .500	2.15	MS9566-39	3.375	2.565-2.625	4.58	MS9566-60	6.000	5.190-5.250	7.57
MS9566-19	1.312	.502- .562	2.22	MS9566-40	3.500	2.690-2.750	4.72	MS9566 - 61	1.812	1.002 - 1.062	2.79 Ⓐ
MS9566-20	1.375	.565- .625	2.29	MS9566-41	3.625	2.815-2.875	4.85	MS9566 - 62	1.918	1.128 - 1.188	2.93
MS9566-21	1.438	.628- .688	2.36	MS9566-42	3.750	2.940-3.000	4.99				
MS9566-22	1.500	.690- .750	2.43	MS9566-43	3.875	3.065-3.125	5.13				
MS9566-23	1.562	.752- .812	2.50	MS9566-44	4.000	3.190-3.250	5.27				
MS9566-24	1.625	.815- .875	2.57	MS9566-45	4.125	3.315-3.375	5.42				

1. SHANK SHALL BE STRAIGHT WITHIN .003 **TOTAL** PER INCH OF BOLT LENGTH. Ⓐ
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON OD SHALL BE WITHIN .007 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: CORROSION AND HEAT RESISTANT STEEL AMS 5731.
6. MANUFACTURING SPECIFICATION: AMS 7477.
7. **FLUORESCENT PENETRANT INSPECTION PER AMS 2645.**
8. **SURFACE TEXTURE: USAS B46.1-1962.** UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT Ⓐ UPSET HEAD.
9. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
10. DIMENSION IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 5°.
11. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE **MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION** Ⓐ

APPROVED 16 Dec 65 REVISED Ⓐ 17 Nov 69

P.A. USAF - 11 **Other Cust** Navy - AS Army - AV Ⓐ	**TITLE** Ⓐ BOLT, MACHINE - DOUBLE HEXAGON EXTENDED WASHER HEAD, DRILLED, PD SHANK, AMS 5731, .250-28UNJF-3A	**MILITARY STANDARD** **MS9566**
PROCUREMENT SPECIFICATION NONE	**SUPERSEDES:**	**SHEET** 1 **OF** 1

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Review activities:
Army - MC
USAF - 82, 85

User activities:

DD FORM 1 MAR 64 672-1 *(Coordinated)*

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

E-25-164-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:20Z
Check the source to verify that this is the current version before use.