MS9751 (ASG)

FED SUP CLASS
5306

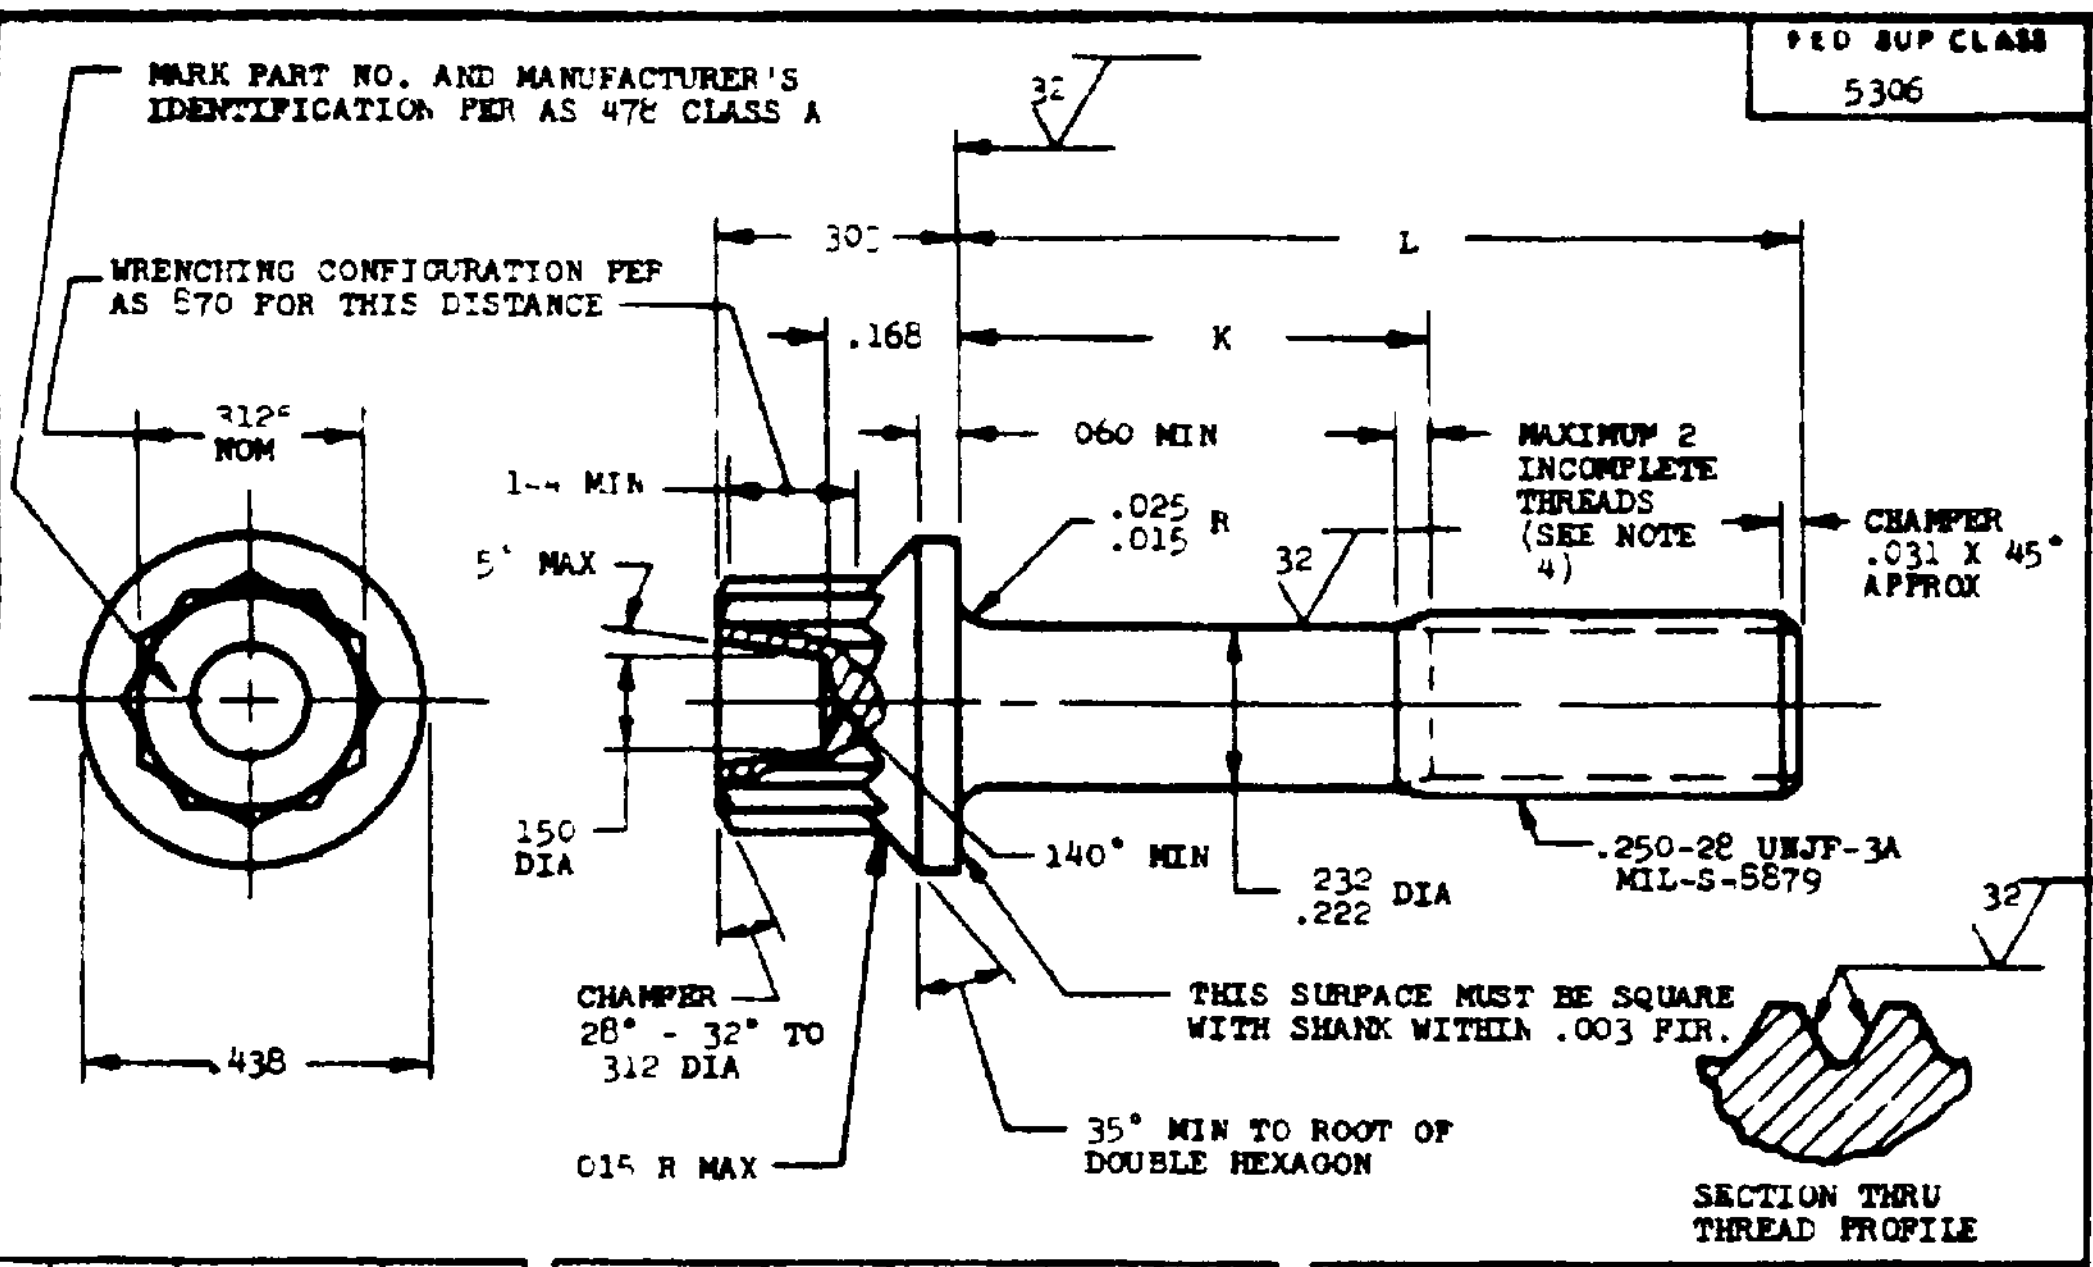

MARK PART NO. AND MANUFACTURER'S IDENTIFICATION PER AS 478 CLASS A
32
WRENCHING CONFIGURATION PER AS 870 FOR THIS DISTANCE
.30
L
.168
K
.312 NOM
.060 MIN
1-- MIN
MAXIMUM 2 INCOMPLETE THREADS (SEE NOTE 4)
5° MAX
.025 .015 R
32
CHAMFER .031 X 45° APPROX
.150 DIA
140° MIN
.232 .222 DIA
.250-28 UNJF-3A MIL-S-8879
32
.438
CHAMFER 28° - 32° TO .312 DIA
THIS SURFACE MUST BE SQUARE WITH SHANK WITHIN .003 FIR.
.015 R MAX
35° MIN TO ROOT OF DOUBLE HEXAGON
SECTION THRU THREAD PROFILE

PART NO.	L	K	APPROX WEIGHT LB/100
MS9751-04	375	.079-.099	73
MS9751-05	438	079- 099	77
MS9751-06	500	079- 099	61
MS9751-07	562	079- 099	55
MS9751-08	625	079- 099	89
MS9751-09	688	.079-.099	93
MS9751-10	.750	.079-.099	.97
MS9751-11	.812	.079- 099	1.01
MS9751-12	.875	079-.125	1 05
MS9751-13	938	126- 188	1 09
MS9751-14	1.000	.190-.250	1.13
MS9751-15	1.062	252-.312	1 17
MS9751-16	1.125	.315-.375	1.21
MS9751-17	1.188	378-.438	1 25
MS9751-18	1.250	440-.500	1 29
MS9751-19	1 312	502- 562	1 33
MS9751-20	1.375	565-.625	1 37
MS9751-21	1.438	.628- 688	1 41
MS9751-22	1 500	690- 750	1 45
MS9751-23	1 562	.752-.812	1 49
MS9751-24	1 625	815- 875	1 53

PART NO	L	K	APPROX WEIGHT LB/100
MS9751-25	1.688	878- 938	1 57
MS9751-26	1 750	940-1 000	1 61
MS9751-27	1 812	1 002-1 062	1 65
MS9751-28	1 875	1 06[illegible]-1 1[illegible]	1 69
MS9751-29	2.000	1.190-1 250	1 77
MS9751-30	2.125	1 315-1 375	1 85
MS9751-31	2.250	1 440-1.500	1.93
MS9751-32	2.375	1 565-1.625	2 01
MS9751-33	2.500	1 690-1 750	2 09
MS9751-3	2 625	1.815-1.875	2 17
MS9751-35	2 750	1 940-2 000	2 25
MS9751-36	2 875	2 065-2 125	2 33
MS9751-37	3 000	2.190-2 250	2 41
MS9751-38	3 125	2 315-2.375	2 49
MS9751-39	3 250	2 440-2.500	2.57
MS9751-40	3 375	2.565-2 625	2.65
MS9751-41	3 500	2.690-2 750	2 73
MS9751-42	3 625	2.815-2 875	2.81
MS9751-43	3 750	2 940-3 000	2.89
MS9751-44	3 875	3.065-3.125	2 97
MS9751-45	4 000	3 190-3 250	3 05

PART NO.	L	K	APPROX WEIGHT LB/100
MS9751-46	4.125	3 315-3 375	3 13
MS9751-47	4 250	3 440-3 500	3 21
MS9751-48	4 375	3 565-3 625	3 29
MS9751-49	4 500	3 690-3 750	3 37
MS9751-50	4 625	3 815-3 875	3 45
MS9751-51	4.750	3 940-4 000	3 53
MS9751-52	4.875	4.065-4 125	3 61
MS9751-53	5 000	4 190-4 250	3 69
MS9751-54	5 125	4 315-4 375	3 78
MS9751-55	5 250	4 440-4 500	3 86
MS9751-56	5 375	4 565-4 625	3 94
MS9751-57	5 500	4 690-4.750	4 02
MS9751-58	5 625	4 815-4 875	4 10
MS9751-59	5 750	4 940-5 000	4.18
MS9751-60	5.875	5.065-5 125	4 26
MS9751-61	6 000	5 190-5.250	4 34

1 SHANK SHALL BE STRAIGHT WITHIN 003 PER INCH OF BOLT LENGTH
2. THE RUNOUT OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR
3 THE RUNOUT OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON OD SHALL BE WITHIN .007 FIR
4. INCOMPLETE THREADS NOT TO ENTER FILLET
5. MATERIAL TITANIUM AMS 4967
6. HARDNESS ROCKWELL C36-42.
7. MANUFACTURING SPECIFICATION AMS 7461, EXCEPT MATERIAL AS NOTED
8 FLUORESCENT PENETRANT INSPECTION PER AMS 2645
9 SURFACE TEXTURE USAS B46 1-1962 UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
10 BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED
11 DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES LINEAR DIMENSIONS ± 0.0, ANGULAR DIMENSIONS ±5°.
12 DO NOT USE UNASSIGNED PART NUMBERS

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIV

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

Review activities: USAF-MA, 85

REVISED

APPROVED : Mar 69

P.A. USAF - 11 Other Cust Navy - A	TITLE BOLT, MACHINE - DOUBLE HEXAGON EXTENDED WASHER HEAD, PD SHANK, TITANIUM AMS 4967, .250-28 UNJF-3A	MILITARY STANDARD MS9751 (ASG)
PROCUREMENT SPECIFICATION	SUPERSEDES	SHEET 1 OF -

DD FORM 1 SEP 61 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:24Z
Check the source to verify that this is the current version before use.