
MS9928 (ASG)

FED. SUP CLASS 5306

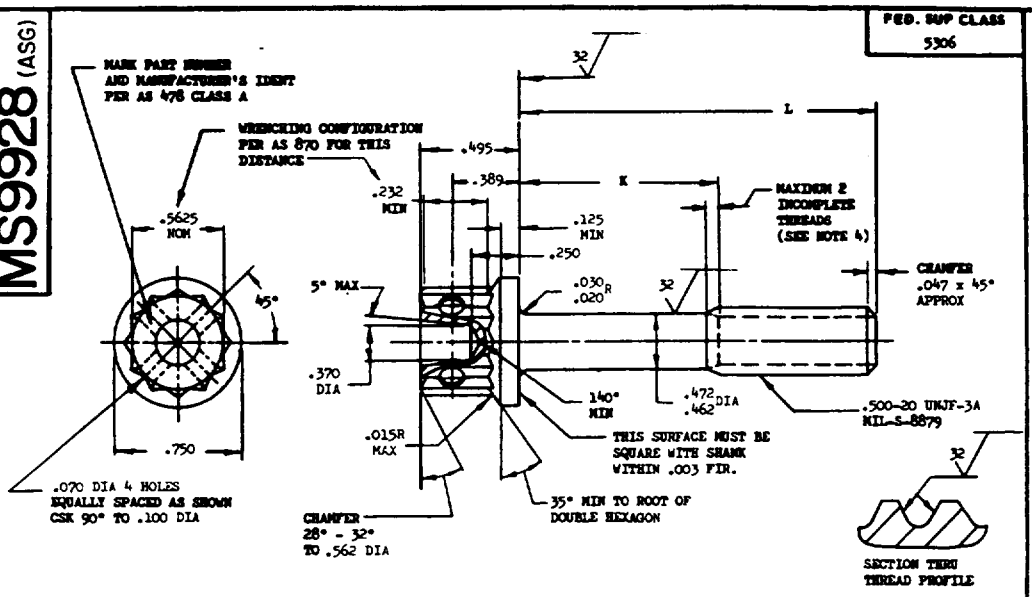

PART NO.	L	K	APPROX. WEIGHT LB/100
MS9928-03	.750	.105- .125	7.25
MS9928-04	.812	.105- .125	7.56
MS9928-05	.875	.105- .125	7.86
MS9928-06	.938	.105- .125	8.16
MS9928-07	1.000	.105- .125	8.47
MS9928-08	1.062	.105- .125	8.77
MS9928-09	1.125	.105- .125	9.07
MS9928-10	1.188	.105- .125	9.37
MS9928-11	1.250	.105- .125	9.67
MS9928-12	1.312	.105- .125	9.97
MS9928-13	1.375	.105- .125	10.27
MS9928-14	1.438	.128- .188	10.57
MS9928-15	1.500	.190- .250	10.87
MS9928-16	1.562	.252- .312	11.18
MS9928-17	1.625	.315- .375	11.49
MS9928-18	1.688	.378- .438	11.79
MS9928-19	1.750	.440- .500	12.09
MS9928-20	1.812	.502- .562	12.40
MS9928-21	1.875	.565- .625	12.70

PART NO.	L	K	APPROX WEIGHT LB/100
MS9928-22	1.938	.628- .688	13.00
MS9928-23	2.000	.690- .750	13.31
MS9928-24	2.125	.815- .875	13.91
MS9928-25	2.250	.940-1.000	14.51
MS9928-26	2.375	1.065-1.125	15.11
MS9928-27	2.500	1.190-1.250	15.72
MS9928-28	2.625	1.315-1.375	16.33
MS9928-29	2.750	1.440-1.500	16.93
MS9928-30	2.875	1.565-1.625	17.54
MS9928-31	3.000	1.690-1.750	18.14
MS9928-32	3.125	1.815-1.875	18.75
MS9928-33	3.250	1.940-2.000	19.35
MS9928-34	3.375	2.065-2.125	19.95
MS9928-35	3.500	2.190-2.250	20.54
MS9928-36	3.625	2.315-2.375	21.17
MS9928-37	3.750	2.440-2.500	21.77
MS9928-38	3.875	2.565-2.625	22.38
MS9928-39	4.000	2.690-2.750	22.98

PART NO.	L	K	APPROX WEIGHT LB/100
MS9928-40	4.125	2.815-2.875	23.59
MS9928-41	4.250	2.940-3.000	24.18
MS9928-42	4.375	3.065-3.125	24.79
MS9928-43	4.500	3.190-3.250	25.40
MS9928-44	4.625	3.315-3.375	26.01
MS9928-45	4.750	3.440-3.500	26.61
MS9928-46	4.875	3.565-3.625	27.22
MS9928-47	5.000	3.690-3.750	27.82
MS9928-48	5.125	3.815-3.875	28.43
MS9928-49	5.250	3.940-4.000	29.02
MS9928-50	5.375	4.065-4.125	29.63
MS9928-51	5.500	4.190-4.250	30.24
MS9928-52	5.625	4.315-4.375	30.85
MS9928-53	5.750	4.440-4.500	31.45
MS9928-54	5.875	4.565-4.625	32.05
MS9928-55	6.000	4.690-4.750	32.66

1. SHANK SHALL BE STRAIGHT WITHIN .002 PER INCH OF BOLT LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON OD SHALL BE WITHIN .012 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: STEEL AMS 6322.
6. HARDNESS: ROCKWELL C26-32.
7. FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS SPECIFIED ARE AFTER PLATING.
8. MANUFACTURING SPECIFICATION: AMS 7452 EXCEPT HEAD SHALL BE UPSET.
9. HEAD TO SHANK FILLET SHALL BE COLD WORKED.
10. MAGNETIC PARTICLE INSPECTION PER AMS 2640 AFTER PLATING.
11. SURFACE TEXTURE: USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
12. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
13. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
14. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION.

APPROVED 15 Aug 69 REVISED

Review activities: USAF - 82, 85

This military standard is approved by the Department of the Air Force and the Bureau of Naval Weapons and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

P.A. USAF - 11	TITLE	MILITARY STANDARD
Other Cust: Navy - AS	BOLT, MACHINE - DOUBLE HEXAGON EXTENDED WASHER HEAD, DRILLED, PD SHANK, STEEL AMS 6322, CADMIUM PLATED, .500-20 UNJF-3A	MS9928 (ASG)
PROCUREMENT SPECIFICATION: NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination) ASD use only

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1969-393-065/5-1797

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:28Z
Check the source to verify that this is the current version before use.