
FED. SUP CLASS
4730

# MS9954

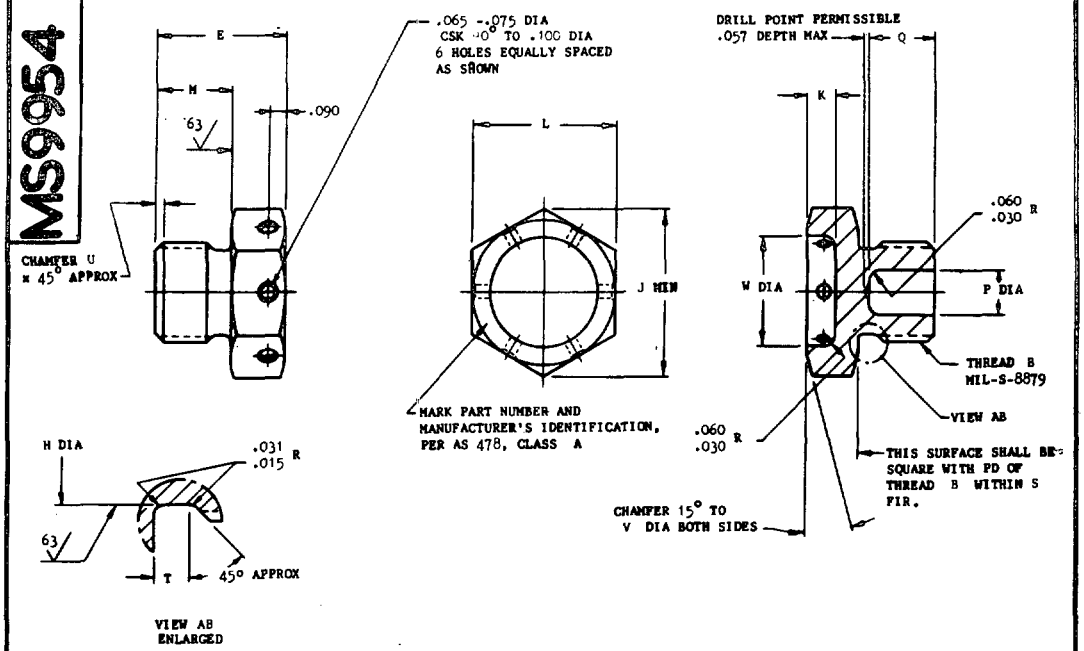


| PART NO. | THREAD B | E | H +.002 -.003 | J MIN | K | L | M | P | Q | S | T +.015 -.000 | U | V | W | APPROX WEIGHT LB/100 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| MS9954-01 | .250 -28 UNJF-3A | .560 | .196 | .482 | .150 | .430- .439 | .320 | - | - | .003 | .063 | .020-.050 | .438 | .250 | .421 |
| MS9954-02 | .3125-24 UNJF-3A | .600 | .250 | .622 | .150 | .553- .564 | .360 | - | - | .003 | .063 | .020-.050 | .562 | .312 | .731 |
| MS9954-03 | .375 -24 UNJF-3A | .600 | .312 | .694 | .150 | .616- .627 | .360 | - | - | .003 | .063 | .020-.050 | .625 | .375 | .942 |
| MS9954-04 | .4375-20 UNJF-3A | .660 | .364 | .766 | .150 | .679- .690 | .400 | - | - | .003 | .075 | .030-.060 | .688 | .438 | 1.301 |
| MS9954-05 | .500 -20 UNJF-3A | .670 | .426 | .837 | .150 | .741- .752 | .400 | - | - | .003 | .075 | .030-.060 | .750 | .500 | 1.654 |
| MS9954-06 | .5625-18 UNJF-3A | .680 | .481 | .907 | .150 | .803- .814 | .400 | - | - | .003 | .083 | .040-.070 | .812 | .562 | 2.021 |
| MS9954-07 | .625 -18 UNJF-3A | .730 | .544 | .978 | .160 | .865- .877 | .440 | - | - | .003 | .083 | .040-.070 | .875 | .625 | 2.554 |
| MS9954-08 | .750 -16 UNJF-3A | .730 | .660 | 1.121 | .160 | .990-1.002 | .440 | .250 | .400 | .003 | .094 | .040-.070 | 1.000 | .750 | 3.265 |
| MS9954-09 | .8125-16 UNJ-3A | .740 | .722 | 1.191 | .160 | 1.052-1.064 | .440 | .312 | .400 | .003 | .094 | .040-.070 | 1.062 | .812 | 3.769 |
| MS9954-10 | .875 -14 UNJF-3A | .740 | .773 | 1.263 | .160 | 1.115-1.127 | .440 | .375 | .400 | .003 | .107 | .050-.080 | 1.125 | .875 | 4.122 |
| MS9954-11 | 1.000 -12 UNJF-3A | .780 | .882 | 1.475 | .190 | 1.301-1.314 | .440 | .500 | .400 | .005 | .125 | .050-.080 | 1.312 | 1.000 | 5.792 |
| MS9954-12 | 1.0625-12 UNJ-3A | .830 | .945 | 1.475 | .200 | 1.301-1.314 | .480 | .562 | .400 | .005 | .125 | .050-.080 | 1.312 | 1.000 | 6.307 |
| MS9954-14 | 1.1875-12 UNJ-3A | .830 | 1.070 | 1.619 | .200 | 1.427-1.440 | .480 | .688 | .400 | .005 | .125 | .050-.080 | 1.438 | 1.125 | 7.388 |
| MS9954-16 | 1.3125-12 UNJ-3A | .840 | 1.195 | 1.833 | .200 | 1.614-1.627 | .480 | .812 | .400 | .005 | .125 | .050-.080 | 1.625 | 1.312 | 9.243 |
| MS9954-18 | 1.500 -12 UNJF-3A | .840 | 1.382 | 1.974 | .200 | 1.738-1.752 | .480 | 1.000 | .400 | .005 | .125 | .050-.080 | 1.750 | 1.438 | 10.841 |
| MS9954-20 | 1.625 -12 UNJ-3A | .850 | 1.507 | 2.117 | .200 | 1.863-1.877 | .480 | 1.125 | .400 | .005 | .125 | .050-.080 | 1.875 | 1.562 | 12.556 |
| MS9954-24 | 1.875 -12 UNJ-3A | .860 | 1.756 | 2.402 | .200 | 2.113-2.127 | .480 | 1.375 | .400 | .005 | .125 | .050-.080 | 2.125 | 1.812 | 16.059 |
| MS9954-28 | 2.250 -12 UNJ-3A | .870 | 2.131 | 2.830 | .200 | 2.488-2.502 | .480 | 1.750 | .400 | .005 | .125 | .050-.080 | 2.500 | 2.188 | 21.965 |
| MS9954-32 | 2.500 -12 UNJ-3A | .870 | 2.381 | 3.115 | .200 | 2.738-2.752 | .480 | 2.000 | .400 | .005 | .125 | .050-.080 | 2.750 | 2.438 | 26.026 |

1. HEXAGON AND DIAMETER V SHALL BE CONCENTRIC WITH THREAD PD WITHIN .010 FIR.
2. DIAMETER H SHALL BE CONCENTRIC WITH THREAD PD WITHIN .005 FIR, AND FREE FROM THREAD TOOL MARKS.
3. MATERIAL: ALUMINUM AMS 4121
4. FINISH: ANODIC TREATMENT AMS 2470. DO NOT DYE
5. SURFACE TEXTURE: USAS B46.1 - 1962. UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES.
6. FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
7. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
8. DIMENSION IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
9. DO NOT USE UNASSIGNED PART NUMBERS.
* INTERNATIONAL STANDARDIZATION: CERTAIN PROVISIONS OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENTS ASCC AIR STD 17/15. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE DEPARTMENTAL CUSTODIANS WILL INFORM THEIR RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICE SO THAT APPROPRIATE ACTION MAY BE TAKEN RESPECTING THE INTERNATIONAL AGREEMENT CONCERNED.

AS AND AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC., PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION.

APPROVED 7 Dec 70 REVISED

User activities: Navy - AS, MC, CG

Review activities: Air Force - 11 Navy - AS

This standard has been approved by the Department of the Air Force (11) and the Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

| P.A. AIR FORCE-11 Other Cust NAVY - AS | INTERNATIONAL INTEREST SEE NOTE * | TITLE PLUG, MACHINE THREAD-DRILLED, AMS 4121, PREFORMED PACKING, MIL-S-8879 THREAD | MILITARY STANDARD MS9954 |
|---|---|---|---|
| PROCUREMENT SPECIFICATION | SUPERSEDES: MS9015-08 Thru -32 | | SHEET 1 OF 1 |

DD FORM 1 OCT 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

☆ U. S. GOVERNMENT PRINTING OFFICE: 1971-433-694/3543

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:28Z
Check the source to verify that this is the current version before use.