MILITARY SPECIFICATION-

MICROCIRCUIT, DIGITAL, TTL,

NAND BUFFER, MONOLITHIC

SILICON

This amendment forms a part of Military Specification MIL-M-0038510/3E(USAF), dated 1 December 1975.

PAGE 1

1.4, Maximum low level input voltage: Add "(device types 01, 02)" after 0.8 Vdc. *Add "0.7 Vdc (device type 03)".*

PAGE 5

TABLE I., (device type 03)
Test 2: Delete Max. limit of "0.8" and substitute "0.7".
Test 3: Delete "V_{IL} = 0.8" under conditions column and substitute "V_{IL} = 0.7 V".

PAGE 6

FIGURE 1, Device type 02 and 03, delete and substitute:

Device types 02 and 03

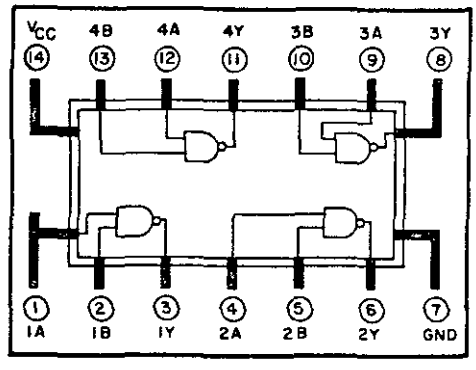

Custodian:
Air Force - 19

Review activities
Air Force - 17
DSA - ES

Preparing activity:
Air Force - 19

Agent:
DSA - ES

(Project 5962-F088-64)

☆U.S. GOVERNMENT PRINTING OFFICE: 1976—603-766/6725

FSC 5962

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:46Z
Check the source to verify that this is the current version before use.