
MIL-C-81511/14D
5 June 1970
SUPERSEDING
MIL-C-81511/14C (NAVY)
21 April 1970

MILITARY SPECIFICATION SHEET


CONNECTORS, ELECTRICAL, CIRCULAR, HIGH DENSITY, QUICK DISCONNECT, ENVIRONMENT RESISTING, AND ACCESSORIES, ADAPTER, STRAIGHT

The complete requirements for procuring the accessory described herein shall consist of this document and the latest issue of Specification MIL-C-81511.


This specification is mandatory for use by all Departments and Agencies of the Department of Defense

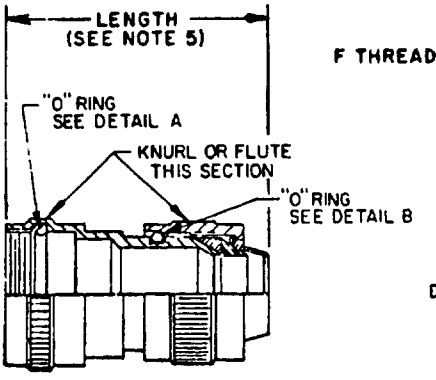


FUNCTION "A" ADAPTER ASSEMBLY
(SEE NOTE 6)

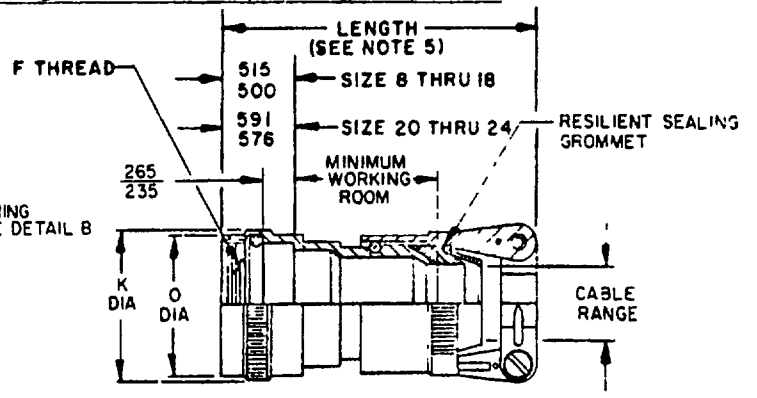


FUNCTION "B" ADAPTER ASSEMBLY
(SEE NOTE 6)




FUNCTION "C" ADAPTER ASSEMBLY
(SEE NOTE 6)

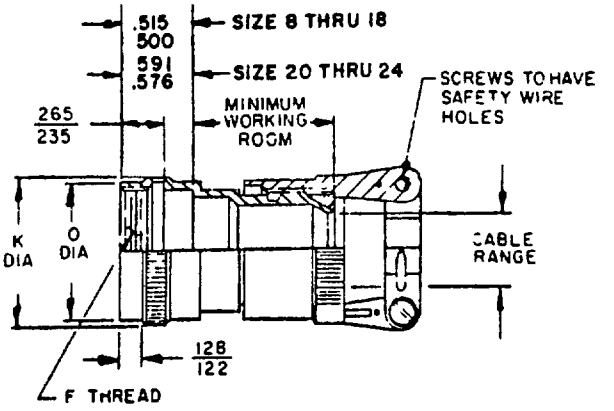

FUNCTION "D" ADAPTER ASSEMBLY
(SEE NOTE 6)



DETAIL A



DETAIL B

INCHES	MM	INCHES	MM
.003	.08	.265	6.73
.067	1.70	.470	11.94
.073	1.85	.485	12.32
.100	2.54	.500	12.70
.106	2.69	.515	13.08
.122	3.10	.576	14.63
.128	3.25	.591	15.01
.235	5.97		

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 202610-23T05:33Z
Check the source to verify that this is the currentersion before use.

Part No. M81511/14- Dash No.	Shell size	Function symbol (SEE NOTE 6)	Cable range Minimum	Cable range Maximum	F thread class 2B	"O" dia (SEE NOTE 7)	K dia (SEE NOTE 7)	Min. working room	Length ref (SEE NOTE 5)	Approx weight in lbs.
001	8	A	.062 (1.57)	.125 (3.18)	½-28UNEF				2.22 (56.39)	.025
002			.125 (3.18)	.250 (6.35)				1.125 (28.58)		.025
003		B	.062 (1.57)	.125 (3.18)		.555 (14.10)	.640 (16.26)		2.72 (69.09)	.036
004			.125 (3.18)	.250 (6.35)						.036
005		A	.062 (1.57)	.125 (3.18)		.546 (13.87)	.620 (15.75)		2.72 (69.09)	.028
006			.125 (3.18)	.250 (6.35)				1.625 (41.28)		.028
007		B	.062 (1.57)	.125 (3.18)					3.22 (81.79)	.039
008			.125 (3.18)	.250 (6.35)						.039
009	10		.125 (3.18)	.250 (6.35)	5/8-28UN				2.22 (56.39)	.027
010		A	.250 (6.35)	.375 (9.53)						.033
C11			.375 (9.53)	.500 (12 70)				1.125 (28.58)		.039
012			.125 (3.18)	.250 (6.35)					2.72 (69.09)	.038
013		B	.250 (6.35)	.375 (9.53)		.680 (17.27)	.765 (19.43)			.047
014			.375 (9.53)	.500 (12.70)						.052
015			.125 (3.18)	.250 (6.35)		.671 (17.04)	.745 (18.92)		2.72 (69.09)	.031
016		A	.250 (6.35)	.375 (9.53)						.037
017			.375 (9.53)	.500 (12.70)				1.625 (41.28)		.043
018			.125 (3.18)	.250 (6.35)					3.22 (81.79)	.042
019		B	.250 (6.35)	.375 (9.53)						.051
020			.375 (9.53)	.500 (12.70)						.05ɔ
021	14		.250 (6.35)	.375 (9.53)	7/8 28UN				2.22 (56.39)	.036
022		A	.375 (9.53)	.500 (12.70)						.042
023			.500 (12.70)	.625 (15.88)				1.125 (28.58)		.052
024			.250 (6.35)	.375 (9.53)					2.72 (69.09)	.050
025		B	.375 (9.53)	.500 (12.70)		.930 (23.62)	1.015 (25.78)			.055
026			.500 (12.70)	.625 (15.88)						.063
027			.250 (6.35)	.375 (9.53)		.921 (23.39)	.995 (25.27)		2.72 (69.09)	.043
028		A	.375 (9.53)	.500 (12.70)						.049
029			.500 (12.70)	.625 (15.38)				1.625 (41.28)		.059
030			.250 (6.35)	.375 (9.53)					3.22 (81.79)	.057
031		B	.37 (9.53)	.500 (12.70)						.062
032			.500 (12.70)	.625 (15.88)						.070
033	16		.250 (6.35)	.375 (9.53)	1-28UN				2.22 (56.39)	.038
034		A	.375 (9.53)	.500 (12.70)						.044
035			.500 (12.70)	.625 (15 88)				1.125 (28.58)		.054
036			.250 (6.35)	.375 (9.53)					2.72 (69.09)	.052
037		B	.375 (9.53)	.500 (12.70)		1.056 (26.82)	1.140 (28.96)			.057
038			.500 (12.70)	.625 (15.88)						.065
039			.250 (6.35)	.375 (9.53)		1.047 (26.59)	1.120 (28.45)		2.72 (69.09)	.045
040		A	.375 (9.53)	.500 (12.70)						.051
041			.500 (12.70)	.625 (15.88)				1.625 (41.28)		.061
042			.250 (6.35)	.375 (9.53)					3.22 (81.79)	.059
043		B	.375 (9.53)	.500 (12.70)						.064
044			.500 (12.70)	.625 (15.88)						.072

FIGURE - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:33Z
Check the source to verify that this is the current version before use.

Part No. M81511/14- Dash No.	Shell size	Function symbol (SEE NOTE 6)	Cable range Min	Cable range Max	F thread class 2B	O dia (SEE NOTE 7)	K dia (SEE NOTE 7)	Min working room	Length ref (SEE NOTE 5)	Approx weight in lbs
045	18	A	.375 (9.53)	.500 (12.70)	1-1/8-28UN	1.180 (29.97)	1.265 (32.13)	1.125 (28.58)	2.22 (56.39)	.046
046			.500 (12.70)	.625 (15.88)						.057
047			.625 (15.88)	.750 (19.05)						.055
048		B	.375 (9.53)	.500 (12.70)					2.72 (69.09)	.059
049			.500 (12.70)	.625 (15.88)						.067
050			.625 (15.88)	.750 (19.05)						.074
051		A	.375 (9.53)	.500 (12.70)		1.171 (29.74)	1.245 (31.62)	1.625 (41.28)	2.72 (69.09)	.054
052			.500 (12.70)	.625 (15.88)						.065
053			.625 (15.88)	.750 (19.05)						.063
054		B	.375 (9.53)	.500 (12.70)					3.22 (81.79)	.067
055			.500 (12.70)	.625 (15.88)						.075
056			.625 (15.88)	.750 (19.05)						.082
057	8	C	.062 (1.57)	.125 (3.18)	1/2-28UNEF	.555 (14.10)	.640 (16.26)	1.125 (28.58)	1.71 (43.43)	.022
058			.125 (3.18)	.250 (6.35)					2.47 (62.74)	.022
059		D	.062 (1.57)	.125 (3.18)						.033
060			.125 (3.18)	.250 (6.35)						.033
061		C	.062 (1.57)	.125 (3.18)		.546 (13.87)	.620 (15.75)	1.625 (41.28)	2.21 (56.13)	.025
062			.125 (3.18)	.250 (6.35)						.025
063		D	.062 (1.57)	.125 (3.18)					2.97 (75.44)	.036
064			.125 (3.18)	.250 (6.35)						.036
065	10	C	.125 (3.18)	.250 (6.35)	5/8-28UN	.680 (17.27)	.765 (19.43)	1.125 (28.58)	1.71 (43.43)	.024
066			.250 (6.35)	.375 (9.53)						.028
067			.375 (9.53)	.500 (12.70)						.034
068		D	.125 (3.18)	.250 (6.35)					2.47 (62.74)	.035
069			.250 (6.35)	.375 (9.53)						.043
070			.375 (9.53)	.500 (12.70)						.046
071		C	.125 (3.18)	.250 (6.35)		.671 (17.04)	.745 (18.92)	1.625 (41.28)	2.21 (56.13)	.028
072			.250 (6.35)	.375 (9.53)						.032
073			.375 (9.53)	.500 (12.70)						.038
074		D	.125 (3.18)	.250 (6.35)					2.97 (75.44)	.039
075			.250 (6.35)	.375 (9.53)						.047
076			.375 (9.53)	.500 (12.70)						.050
077	14	C	.250 (6.35)	.375 (9.53)	7/8-28UN	.930 (23.62)	1.015 (25.78)	1.125 (28.58)	1.71 (43.43)	.031
078			.375 (9.53)	.500 (12.70)						.037
079			.500 (12.70)	.625 (15.88)						.045
080		D	.250 (6.35)	.375 (9.53)					2.47 (62.74)	.046
081			.375 (9.53)	.500 (12.70)						.049
082			.500 (12.70)	.625 (15.88)						.055
083		C	.250 (6.35)	.375 (9.53)		.921 (23.39)	.995 (25.27)	1.625 (41.28)	2.21 (56.13)	.038
084			.375 (9.53)	.500 (12.70)						.044
085			.500 (12.70)	.625 (15.88)						.052
086		D	.250 (6.35)	.375 (9.53)					2.97 (75.44)	.053
087			.375 (9.53)	.500 (12.70)						.056
088			.500 (12.70)	.625 (15.88)						.062

FIGURE - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:33Z
Check the source to verify that this is the current version before use.

Part No. M81511 '14- Dash No.	Shell size	Function symbol (SEE NOTE 6)	Cable range Min	Cable range Max	F thread class 2B	"O" dia (SEE NOTE 7)	K dia (SEE NOTE 7)	Min working room	Length ref (SEE NOTE 5)	Approx weight in lbs
089	16	C	.250 (6.35)	.375 (9.53)	1-28UN			1.125 (28.58)	1.71 (43.43)	.033
090			.375 (9.53)	.500 (12.70)						.039
091			.500 (12.70)	.625 (15.88)						.047
092		D	.250 (6.35)	.375 (9.53)					2.47 (62.74)	.048
093			.375 (9.53)	.500 (12.70)		1.056 (26.82)	1.140 (28.96)			.051
094			.500 (12.70)	.625 (15.88)						.057
095		C	.250 (6.35)	.375 (9.53)		1.047	1.120	1.625 (41.28)	2.21 (56.13)	.040
096			.375 (9.53)	.500 (12.70)						.046
097			.500 (12.70)	.625 (15.88)						.054
098		D	.250 (6.35)	.375 (9.53)					2.97 (75.44)	.056
099			.375 (9.53)	.500 (12.70)						.058
100			.500 (12.70)	.625 (15.88)						.064
101	18	C	.375 (9.53)	.500 (12.70)	1-1/8-28UN			1.125 (28.58)	1.71 (43.43)	.041
102			.500 (12.70)	.625 (15.88)						.049
103			.625 (15.88)	.750 (19.05)						.047
104		D	.375 (9.53)	.500 (12.70)					2.47 (62.74)	.053
105			.500 (12.70)	.625 (15.88)		1.180 (29.97)	1.265 (32.13)			.059
106			.625 (15.88)	.750 (19.05)						.066
107		C	.375 (9.53)	.500 (12.70)		1.171 (29.74)	1.245 (31.62)	1.625 (41.28)	2.21 (56.13)	.049
108			.500 (12.70)	.625 (15.88)						.057
109			.625 (15.88)	.750 (19.05)						.055
110		D	.375 (9.53)	.500 (12.70)					2.97 (75.44)	.061
111			.500 (12.70)	.625 (15.88)						.067
112			.625 (15.88)	.750 (19.05)						.074
113	20	A	.500 (12.70)	.625 (15.88)	1-1/4-28UN			1.125 (28.58)	2.30 (58.42)	.054
114			.625 (15.88)	.750 (19.05)						.070
115			.750 (19.05)	.875 (22.23)						.056
116		B	.500 (12.70)	.625 (15.88)		1.305 (33.15)	1.390 (35.31)		2.80 (71.12)	.066
117			.625 (15.88)	.750 (19.05)						.077
118			.750 (19.05)	.875 (22.23)						.083
119		A	.500 (12.70)	.625 (15.88)		1.296 (32.92)	1.370 (34.80)	1.625 (41.28)	2.80 (71.12)	.063
120			.625 (15.88)	.750 (19.05)						.089
121			.750 (19.05)	.875 (22.23)						.065
122		B	.500 (12.70)	.625 (15.88)					3.30 (83.82)	.075
123			.625 (15.88)	.750 (19.05)						.086
124			.750 (19.05)	.875 (22.23)						.092

FIGURE - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:33Z
Check the source to verify that this is the current version before use.

Part No. M81511/14- Dash No.	Shell size	Function symbol (SEE NOTE 6)	Cable range Minimum	Cable range Maximum	F thread class 2B	"O" dia (SEE NOTE 7)	K dia (SEE NOTE 7)	Min. working room	Length ref (SEE NOTE 5)	Approx weight in lbs.
125	22	A	.625 (15.88)	.750 (19.05)	1-3/8-28UN	1.430 (36.32)	1.515 (38.48)	1.125 (28.58)	2.30 (58.42)	.062
126			.750 (19.05)	.875 (22.23)						.083
127			.875 (22.23)	1.000 (25.40)						.057
128		B	.625 (15.88)	.750 (19.05)					2.80 (71.12)	.073
129			.750 (19.05)	.875 (22.23)						.087
130			.875 (22.23)	1.000 (25.40)		1.421 (36.09)	1.495 (37.97)			.092
131		A	.625 (15.88)	.750 (19.05)				1.625 (41.28)	2.80 (71.12)	.072
132			.750 (19.05)	.875 (22.23)						.104
133			.875 (22.23)	1.000 (25.40)						.066
134		B	.625 (15.88)	.750 (19.05)					3.30 (83.82)	.083
135			.750 (19.05)	.875 (22.23)						.097
136			.875 (22.23)	1.000 (25.40)						.102
137	24	A	.750 (19.05)	.875 (22.23)	1-1/2-28UN	1.555 (39.50)	1.640 (41.66)	1.125 (28.58)	2.30 (58.42)	.070
138			.875 (22.23)	1.000 (25.40)						.096
139			1.000 (25.40)	1.125 (28.58)						.058
140		B	.750 (19.05)	.875 (22.23)					2.80 (71.12)	.080
141			.875 (22.23)	1.000 (25.40)						.097
142			1.000 (25.40)	1.125 (28.58)		1.546 (39.27)	1.620 (41.15)			.101
143		A	.750 (19.05)	.875 (22.23)				1.625 (41.28)	2.80 (71.12)	.083
144			.875 (22.23)	1.000 (25.40)						.119
145			1.000 (25.40)	1.125 (28.58)						.067
146		B	.750 (19.05)	.875 (22.23)					3.30 (83.82)	.083
147			.875 (22.23)	1.000 (25.40)						.108
148			1.000 (25.40)	1.125 (28.58)						.112
149	20	C	.500 (12.70)	.625 (15.88)	1 1 4-28UN				1.78 (45.21)	.049
150			.625 (15.88)	.750 (19.05)						.059
151			.750 (19.05)	.875 (22.23)						.050
152		D	.500 (12.70)	.625 (15.88)					2.55 (64.77)	.058
153			.625 (15.88)	.750 (19.05)		1.305 (33.15)	1.330 (33.81)	1.125 28.58)		.067
154			.750 (19.05)	.875 (22.23)						.075
155		C	.500 (12.70)	.625 (15.88)					2.28 (57.91)	.058
156			.625 (15.88)	.750 (19.05)		1.296 (32.92)	1.370 (34.80)			.068
157			.750 (19.05)	.875 (22.23)						.056
158		D	.500 (12.70)	.625 (15.88)				1.625 (41.28)	3.05 (77.47)	.066
159			.625 (15.88)	.750 (19.05)						.076
160			.750 (19.05)	.875 (22.23)						.084

FIGURE - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:33Z
Check the source to verify that this is the current version before use.

Part No. M81511/14- Dash No.	Shell size	Function symbol (SEE NOTE 6)	Cable range Minimum	Cable range Maximum	F thread class 2B	"O" dia (SEE NOTE 7)	K dia (SEE NOTE 7)	Min. working room	Length ref (SEE NOTE 5)	Approx weight in lbs.
161	22	C	.625 (15.88)	.750 (19.05)	1-3/8-28UN	1.430 (36.32)	1.515 (38.48)	1.125 (28.58)	1.78 (45.21)	.057
162			.750 (19.05)	.875 (22.23)						.069
163			.875 (22.23)	1.000 (25.40)						.053
164		D	.625 (15.88)	.750 (19.05)					2.55 (64.77)	.063
165			.750 (19.05)	.875 (22.23)						.075
166			.875 (22.23)	1.000 (25.40)						.084
167		C	.625 (15.88)	.750 (19.05)		1.421 (36.09)	1.495 (37.97)	1.625 (41.28)	2.28 (57.91)	.067
168			.750 (19.05)	.875 (22.23)						.079
169			.875 (22.23)	1.000 (25.40)						.057
170		D	.625 (15.88)	.750 (19.05)					3.05 (77.47)	.071
171			.750 (19.05)	.875 (22.23)						.085
172			.875 (22.23)	1.000 (25.40)						.094
173	24	C	.750 (19.05)	.875 (22.23)	1½-28UN	1.555 (39.50)	1.640 (41.66)	1.125 (28.58)	1.78 (45.21)	.065
174			.875 (22.23)	1.000 (25.40)						.079
175			1.000 (25.40)	1.125 (28.58)						.056
176		D	.750 (19.05)	.875 (22.23)					2.55 (64.77)	.068
177			.875 (22.23)	1.000 (25.40)						.083
178			1.000 (25.40)	1.125 (28.58)						.093
179		C	.750 (19.05)	.875 (22.23)		1.546 (39.27)	1.620 (41.15)	1.625 (41.28)	2.28 (57.91)	.068
180			.875 (22.23)	1.000 (25.40)						.082
181			1.000 (25.40)	1.125 (28.58)						.058
182		D	.750 (19.05)	.875 (22.23)					3.05 (77.47)	.076
183			.875 (22.23)	1.000 (25.40)						.094
184			1.000 (25.40)	1.125 (28.58)						.104

FIGURE - Continued

NOTES
1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. Dimensions are after plating.
5. Length shown is in free assembled condition.
6. Function symbol A = RFI and environmental with gland nut; B = RFI and environmental with strain relief clamp; C = RFI with gland nut; D = RFI with strain relief clamp.
7. All diameters are concentric within .006 (.15) TIR.
8. All seals and "O" rings are silicone rubber.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:33Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - AS
Air Force - 17

Review activities
Army - MI, MU, AV, WC
Navy - SH, EC, OS
Air Force - 11, 85
DSA - ES

User activities
Army - ME, AT
Navy - MC
Air Force -

Preparing activity
Navy - AS

(Project 5935-1646-14)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:33Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*

SPECIFICATION

MIL-C-81511/14D CONNECTORS, ELECTRICAL, CIRCULAR, HIGH DENSITY, QUICK DISCONNECT, ENVIRONMENTAL RESISTING, AND ACCESSORIES; ADAPTER, STRAIGHT

ORGANIZATION *(Of submitter)*	CITY AND STATE

CONTRACT NO	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED *(Printed or typed name and activity)*	DATE

DD FORM 1 NOV 64 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE C-8279

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:33Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Philadelphia, Pennsylvania 19112

OFFICIAL BUSINESS

POSTAGE AND FEES PAID
NAVY DEPARTMENT

Weapons Engineering Standardization Office (Code X)
Naval Air Engineering Center
Philadelphia, Pennsylvania 19112

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:33Z
Check the source to verify that this is the current version before use.