MIL-F-52525/39
30 June 1987

MILITARY SPECIFICATION SHEET

FITTINGS, WIRE REINFORCED HYDRAULIC HOSE AND CLAMP-HALVES: FIELD ATTACHABLE (REUSABLE), SCREW-ON TO 37° FLARE FEMALE SWIVEL, 90° BENT TUBE, FOR USE WITH TYPE 100R12 FOUR-SPIRAL-WRAP REINFORCEMENT HOSE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the fittings described herein shall consist of this specification and the latest issue of specification MIL-F-52525.

REQUIREMENTS:

1. The fittings shall conform to figure 1 and table I. The use of the alternate termination flare as shown in figure 2 and corresponding dimensions of table II is at the option of the contractor.

FSC 4730

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:24Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions for type 100R12 fittings, 90° bent tube.

Specification part number	Hose dash number	Hose I.D.		Hose O.D.		Tube dash number	Tube O.D.		Nominal thread size
		inch	mm	inch	mm		inch	mm	
M52525/39-08-08	08	.50	12.7	.94	23.88	08	.50	12.7	3/4-16
M52525/39-12-12	12	.75	19.05	1.21	30.73	12	.75	19.05	1-1/16-12
M52525/39-16-16	16	1.00	25.4	1.50	38.1	16	1.00	25.4	1-5/6-12

Source: https://assist.dla.mil -- Downloaded: 202640-22T21:24Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions for type 100R12 fittings, 90° bent tube. - Continued

Specification part number	Hose dash number	H Nominal hex size	L		M		N	
			Maximum		Minimum		+.030 -.015	+0.8 -0.4
		inch	inch	mm	inch	mm	inch	mm
M52525/39-08-08	08	.88	1.29	32.77	.384	9.75	.435	11.05
M52525/39-12-12	12	1.25	1.73	43.94	.487	12.37	.562	14.27
M52525/39-16-16	16	1.50	2.02	51.31	.505	12.83	.594	15.09

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:24Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions for type 100R12 fittings, 90° bent tube. - Continued

Specification part number	Hose dash number	P		Q		C		F	
		±.005	± 0.133	Minimum		Maximum		Maximum	
		inch	mm	inch	mm	inch	mm	inch	mm
M52525/39-08-08	08	.570	14.48	.37	9.40	3.60	91.44	1.90	48.26
M52525/39-12-12	12	.850	21.59	.56	14.22	4.50	114.3	2.40	60.96
M52525/39-16-16	16	1.103	28.02	.81	20.57	5.50	139.7	3.10	78.74

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:24Z
Check the source to verify that this is the current version before use.

TABLE II. Dimensions for alternate termination.1/

Tube size (REF)	D		M		N	
inch	inch	mm	inch	mm	inch	mm
.50	.656	16.66	.344	8.74	.460	11.68
.75	.937	23.80	.469	11.91	.562	14.27
1.00	1.187	30.15	.563	14.30	.594	15.09

1/Dimensions H, L, P, Q, C and F shall be in accordance with table I.

2. The maximum working pressures shall be as specified in table III.

TABLE III. Maximum working pressures of fittings.

Hose I.D. (REF) (inch)	Pounds per square inch (PSI)	Megapascals (MPa)
.50	5000	34.47
.75	4000	27.58
1.00	4000	27.58

3. The over-tightening torque for swivel nuts shall be as specified in table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:24Z
Check the source to verify that this is the current version before use.

TABLE IV. Over-tightening torque for swivel nut.

Nominal tube O.D. (REF) (inch)	Torque	
	Inch pounds	Newton meter N·m)1/
.50	450	50.8
.75	900	101.7
1.00	1200	135.6

1/Torque is expressed as Newton meter per radian (N·m/rad) rad = N·m.


4. Marking shall include the manufacturer's name or trademark, size, and hose identifier 100R12. Location of marking is optional.

5. This item must be listed on QPL-52525.

INTENDED USE: Type 100R12 fittings are for use with four-spiral-wrap reinforced hose conforming to MIL-H-52471, type 100R12.

CATALOGING DATA: The military specification part number is a definitive part number which corresponds to the size fitting covered by this specification sheet. The military specification number, the military specification sheet number, code number for size of hose, and code number for size of tube are combined to form the military specification part number.

EXAMPLE: Military specification part number

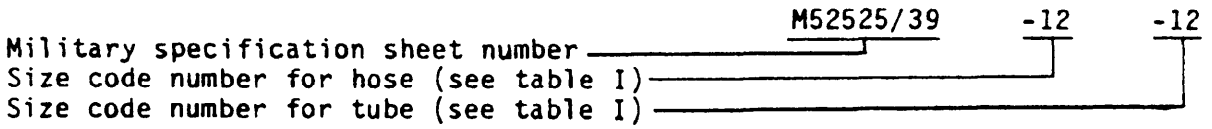

The approved item name of this item, in accordance with the Federal Item Name Directory for the Federal Catalog System, Handbook H6, Section A, is Elbow.

Custodian:
Army - ME

Preparing activity:
Army - ME


Review activities:
Army - GL
DLA - CS

Project 4730-0993

User activities:

Navy - SH
Air Force - 99

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:24Z
Check the source to verify that this is the current version before use.

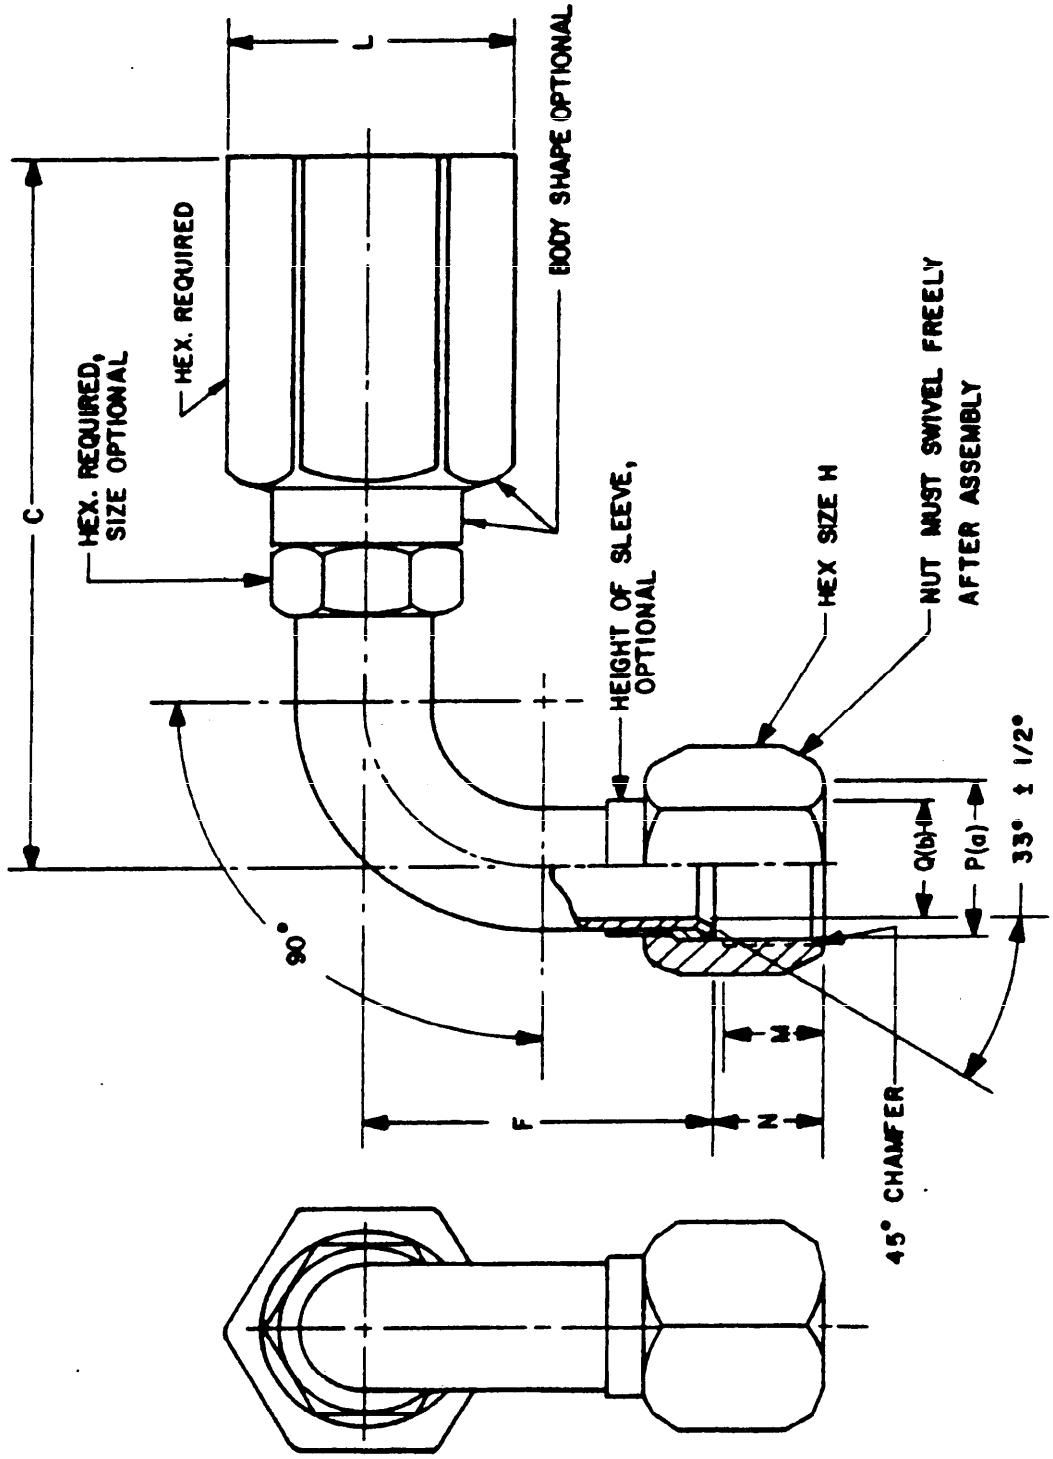


(a) DIMENSION P TO BE CONCENTRIC WITH DIMENSION Q WITHIN 0.015 FIM.
(b) Q = BORE DIAMETER

FIGURE 1. Fitting, screw-on to 37° flare, 90° bent tube, short drop.

X-33578

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:24Z
Check the source to verify that this is the current version before use.

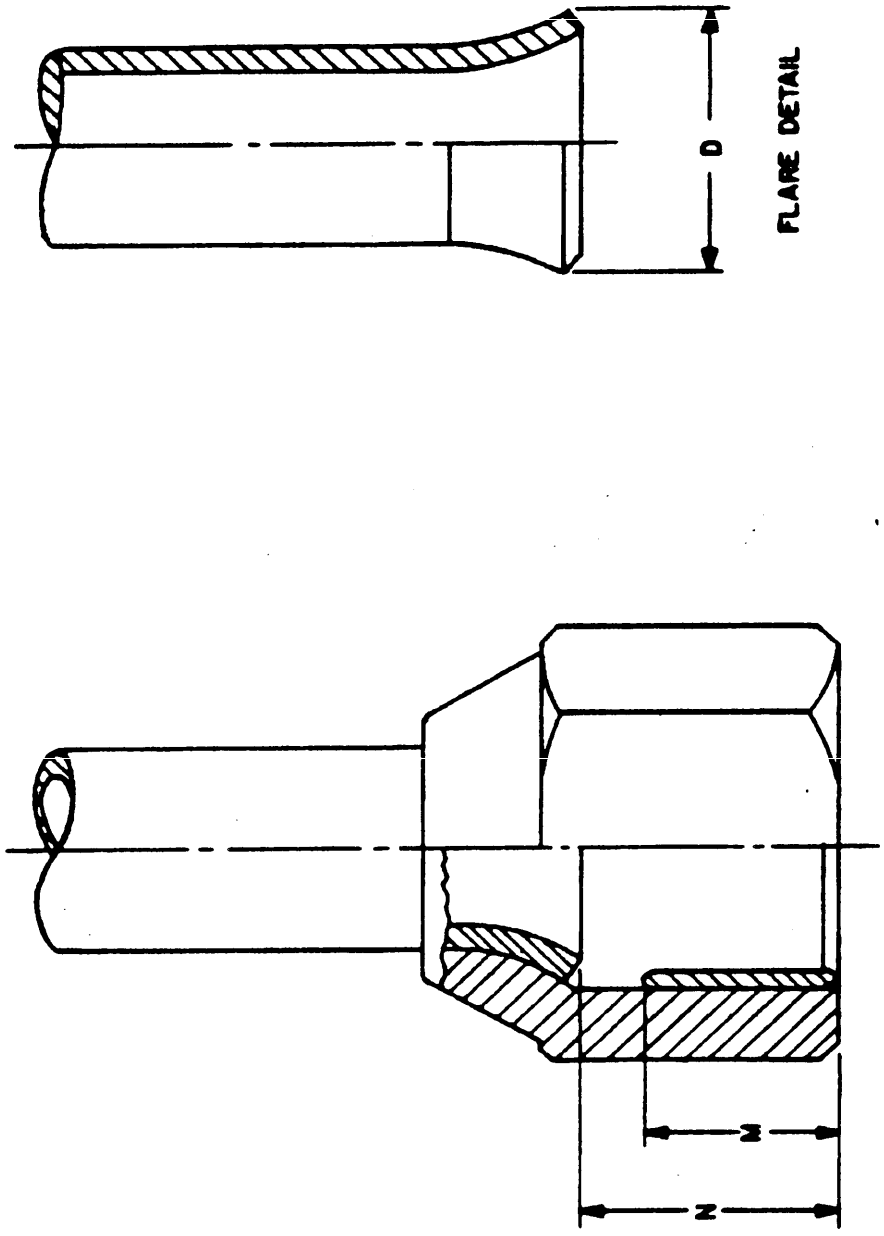

X-3359

FIGURE 2. Alternate termination radial flare.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:24Z
Check the source to verify that this is the current version before use.