MIL-M-63323A(AR)
8 April 1981
SUPERSEDING
MIL-M-63323(AR)
24 August 1979

MILITARY SPECIFICATION

MI CROCIRCUIT, LINEAR, VOLTAGE CO MPARATORS

This specification is approved for use by the U.S. Army Armament Research and Development Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specif ication covers the detail requirements not normally covered by the drawings and provides quality assurance provisions for the fabrication and packing of monolithic, quadruple, micro power voltage comparator devices for use in the various Scatterable Mines.

2. APPLICABLE DOCUMENTS

2.1 The foil wing documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-M-38510 - Microcircuits, General Specification For

MIL-M-55565 - Microcircuits, Preparation For Delivery Of

STANDARDS

FSC: 1345

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Command, Attn. DRDAR-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:38Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-883 - Test Methods and Procedures For Microelectronics

MIL-STD-1188 - Commercial Packaging of Supplies and Equipment

DRAWINGS

U.S. ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND (ARRADCOM)

9292967 - Microcircuit, Linear, Voltage Comparators.

(Copies of specifications, stand ards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the Contracting Officer).

3. REQUIREMENTS

3.1 General. The manufacturer of microcircuit, linear, voltage compara tors (de vices) shall have production and test facilities and a quality and reliability assurance program adequate to assure successful compliance with the provisions of this specification. Only microcircuits which are inspected for and meet all the requirements specified herein shall be marked and delivered.

3.2 Detail specification. The device is a monolithic, quadruple, micropower voltage comparator designed to operate at low voltage (6 volts) and quiescent current. The device shall comply with all the requirements specified on Drawing (DWG) 9292967, in applicable specifications and standards, and herein. Device design, processing, assembly, and inspection shall be in accordance with MIL-M-38510 for Class B microcircuits. Device testing shall be in accordance with MIL-STD-883.

3.3 Temperature

3. 3.1 Operating temperature. The device shall comply with all the electrical requirements of this specification over the temperature range of minus 55° C thru 85° C.

3. 3.2 Storage temperature. The device shall comply with all the requi rements of this specifi cation after storage over the temperature range of minus 55° C thru 125° C. The minimum storage life should be ten years.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:38Z
Check the source to verify that this is the current version before use.

3.4 Environmental and mechanical. Devices to be delivered under this specification shall be capable of meeting the following MIL-STD-883 environmental and mechanical tests when the devices are subjected to these tests in accordance with this specification.

Environmental tests	Method	Conditions
Moisture resistance	1004	
Steady state life	1005	D, 1000 hrs @ 125°C
Temperature cycling	1010	C, 10 cycles
High temperature storage	1008	C
Seal (Fine & Gross)	1014	(A or B & C) respectively
Burn-in	1015	D, 168 hrs @ 125°C
Mechanical tests		
Constant acceleration	2001	E, Y1 orientation only
Mechanical shock	2002	B
Solderability	2003	
Lead integrity	2004	B2
Resistance to solvents	2015	
Vibration, variable frequency	2007	A
External visual	2009	
Internal visual	2010	B
Bond strength	2011	D
Physical dimensions	2016	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:38Z
Check the source to verify that this is the current version before use.

3.5 Electrical

3. 5.1 Electrical performance. The devi ce shal l meet the electrical performance characteristics specified in TABLE I at the temperatures specified. Method of examination and test shall be as specified in TABLE I.

3. 5.2 Screening. All devices to be delivered in accordance with this specification shall be subjected to the screening tests of TABLE II in accordance with the applicable procedures for Class B devices per MIL-STD-883, Method 5004. Interim and final electrical Lest parameters are specified in TABLE I herein.

3. 5.3 Steady state life. The devices shall be subjected to the steady state life test of MIL-STD-883, Method 1005, Condition D and 4. 5.2 herein. Intermediate measurements of device characteristics , sufficient Lo reveal both catastrophic and degradation failures, shall be made at 360 (+120, -O) hours.

3.6 Device marking. Marking of the device shall be in accordance with this specification and MIL-M-38510 as applicable. The marking shall be legible and complete, and shall meet the resistance to solvents requirements of MIL-STD-883, method 2015. The following markings shall be placed on each device:

a. Index point (Pin No. 1) see DWG 9292967

b. Part No. : Example: 9292967X (X: DWG revision letter)

c. Inspection lot identification (Date Code)

d. Manufacturer’s identification

Markings a, b and c shall be placed on the top surface of the device. Marking d may be placed in any suitable location without interfering with the other markings.

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T02:38Z
Check the source to verify that this is the currentversion before use.

TABLE I. Electrical Characteristics.

Characteristics 3/	Parameter Limits -55°C	+25°C	+85°C	Units	Limits	Test Conditions 1/	Test Method 2/
V_{IO} Input Offset Voltage	5.0	3.0	5.0	mV	MAX		4001
I_{IO} Input Offset Current	-	10.0	-	nA	MAX		4001
I_{IB} Input Bias Current (total)	40.0	40.0	40.0	nA	MAX		4001
A_{VOL} DC Open Loop Gain	1.0	1.5	1.5	V/mV	MIN		4004
V_{OL} Low Output Voltage	0.5	0.5	0.5	V	MAX	R_L = 200 Kilohms to VS	4005
V_{OH} High Output Voltage	4.5	4.5	4.5	V	MIN	R_L = 10 Megohms to Ground	4005
CMRR Common Mode Rejection Ratio	-	75.0	-	dB	MIN	R_L = Open V_{IN} = CMR, V_S = ± 3	4003
I_S Supply Current	30.0	30.0	30.0	uA	MAX	R_L = Open All inputs grounded	3005
PSRR Power Supply Rejection Ratio	-	65.0	-	dB	MIN		4003

1/ Test Conditions unless otherwise stated: V_S = +6.0 ± 0.1V; I_{SET} = 1.1 ± 0.1 uA; R_L = 10 Megohms ± 1%; C_L = 10 pF + 10%.

2/ MIL-STD-883: Test Methods or equivalent.

3/ Temperature limits: see 3.3 herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:38Z
Check the source to verify that this is the current version before use.

TABLE II. SCREENING -- ALL DEVICES 100%

Test	Method
Internal Visual	2010 Condition B
High Temperature Storage (Post Seal Bake)	1008, Condition C
Temperature Cycling	1010, Condition C
Constant Acceleration	2001, Condition E, Y_1 orientation only
Seal	
A. Fine	1014, Condition A or B
B. Gross	1014, Condition C
Electrical Characteristics (Pre Burn-in)	TABLE I, (25°C ± 5°C) herein
Burn-in 2/	1015, Condition D, 168 hrs. @ 125°C
Electrical Characteristics (Post Burn-in)	TABLE I, (25°C ± 5°C) herein
External Visual	2009

1/ Methods refer to MIL-STD-883 except as noted.
2/ Class B device, using circuit of Figure 1.

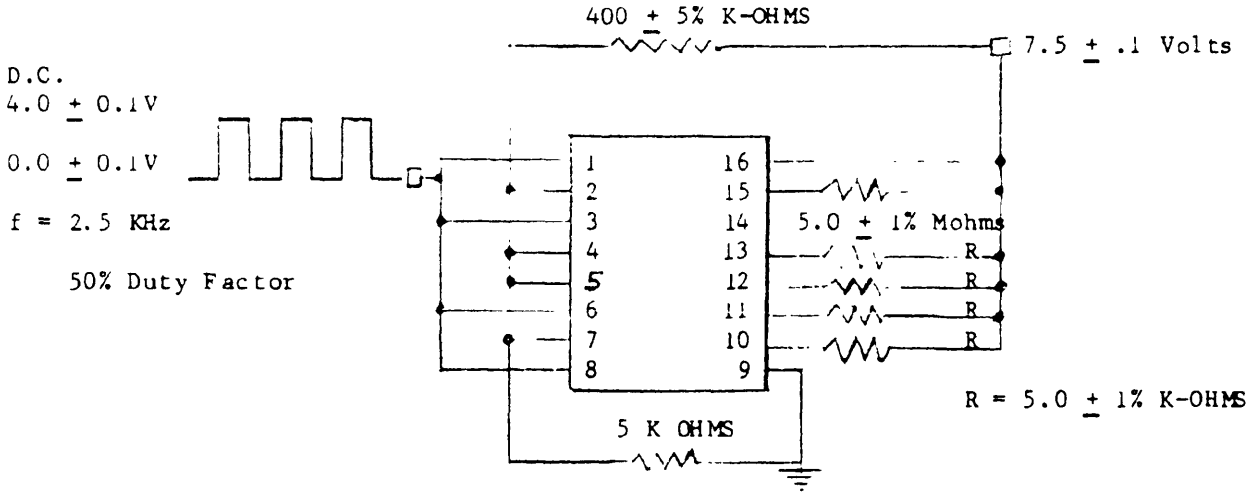


FIGURE 1. Burn-in and Life Test Circuit.

Source: https://assist.dla.mil -- Downloaded: 202610-23T02:38Z
Check the source to verify that this is the current version before use.

3.7 Data requirements. Data shall be recorded on a go/no-go basis and retained for all tests called out by this specification in accordance with 4.5.3. The contractor shall submit to the qualifying agency accept/reject limits used for each go/no-go test.

3.8 Process controls. All process controls essential for manufacturing of devices to assure a reliable end item shall be submitted to the designated agency specified in 6.6 herein, prior to the start of fabrication.

3.9 First article inspection. This specification contains technical provisions for first article inspection. Requirements for the submission of first article samples by the contractor shall be as specified in the contract.

3.10 Workmanship. Devices shall be manufactured, processed, and tested in a careful and workmanlike manner in accordance with good engineering practice, with the requirements of this specification, and with the production practices, workmanship instructions, inspection and test procedures, and training aids prepared by the manufacturer.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection and standard quality assurance provisions . Unless otherwise specified herein or in the contract, the provisions of MIL-M-38510 shall apply and are hereby made part of this detail specification, the supplier is responsible for the performance of all-inspection requirements *as* specified herein, and the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. In addition, the Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspections. The following types of inspection shall be conducted on this item.

a. First Article Inspection

b. Quality Conformance Inspection

c. Screening

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:38Z
Check the source to verify that this is the current version before use.

4.3 First article inspection

4.3,1 Submission. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with the previsions of 4.3.2. The first article inspection lot size after screening shall consist of fifty (50) devices, minimum.

4.3.2 Inspection to be performed. First article inspection shall be in accordance with the applicable requirements of MIL-M-38510 and as modified by this specification, except that the procuring agency shall be the qualifying activity. First article requirements shall consist of inspections specified in subgroups "a" through “f” listed in TABLE III. First article items may be subjected by the qualifying activity (Government) to all of the examinations and tests specified in this specification and to any requirement of the applicable drawings.

a. Screening. Screening shall be performed on all devices in accordance with the inspection flow specified in TABLE II.

4.3.3 Rejection. If any device fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate its inspection upon any failure of a device in the sample to comply with any of the stated requirements.

4.3.4 Requalification. The device shall be subjected to another First Article *as* stipulated in the contract if:

a. The contractor’s manufacturing techniques or process controls which affect the form, fit, function or internal geometry of the device are revised by either the contractor or one of his sub-contractors supplying parts or assemblies.

b. The contractor relocated his assembly facilities.

c. The contractor uses a new sub-contractor for material, parts, or assembly.

d. A change occurs in devices’s material, performance or assembly,

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:38Z
Check the source to verify that this is the current version before use.

TABLE III. First Article Inspection

CLASSIFICATION OF DEFECTS & TESTS

MIL-M-63323A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER
	Microcircuit, Linear, Voltage Comparators				9292967
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Screening	50	1/	3.5.2	Table II, 4.5.1 herein
	Subgroup a	25			
	Electrical parameters @ -55°C ± 5°C			3.5.1	Table I herein
	Electrical parameters @ +85°C ± 5°C			3.5.1	Table I herein
	Physical dimensions			3.4	MIL-STD-883, Method 2016
	Subgroup b	25			
	Mechanical shock			3.4	MIL-STD-883, Method 2002, B
	Vibration, variable frequency			3.4	MIL-STD-883, Method 2007, A
	Moisture resistance			3.4	MIL-STD-883, Method 1004
	Seal (fine leak)			3.4	MIL-STD-883, Method 1014Aor
	Seal (gross leak)			3.4	MIL-STD-883, Method 1014, C
	External visual			3.4,3.6, 3.10	MIL-STD-883, Method 2009
	Electrical parameters @ 25°C ± 5°C			3.5.1	Table I herein
	Subgroup c				
	Resistance to solvents	3		3.4	MIL-STD-883, Method 2015
	Bond strength (bond pulls 2/)	(25)		3.4	MIL-STD-883, Method 2011, D
	Subgroup d				
	Solderability (leads inspected 3/)	(25)		3.4	MIL-STD-883, Method 2003

NOTES: See page 2

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026/10-23T02:38Z
Check the source to verify that this is the current version before use.

TABLE III. First Article Inspection

CLASSIFICATION OF DEFECTS & TESTS

MIL-M-63323A(AR)

PARAGRAPH	TITLE	SHEET 2 OF 2	DRAWING NUMBER
	Microcircuit, Linear, Voltage Comparators		9292967
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Subgroup e	2			
	Lead integrity			3.4	MIL-STD-883, Method 2004, B2
	Seal (fine leak)			3.4	MIL-STD-883, Method 1014, A or B
	Seal (gross leak)			3.4	MIL-STD-883, Method 1014, C
	Subgroup f	25			
	Steady state life			3.5.3	4.5.2 herein
	Electrical parameters @ 25°C ± 5°C			3.5.1	Table I herein

NOTES:

1/ Devices which fail any test criteria in the screening sequence shall be removed from the First Article sample and replaced by additional units.

2/ The sample size is the number of bond pulls selected from a minimum number of 10 devices.

3/ The sample size is the number of leads inspected. In no case shall less than 3 devices be used to provide the number of required leads.

4/ All electrical parameters shall be recorded as go/no-go data.

5/ The same sample units shall be subjected to all the tests in a subgroup.

6/ Devices used in subgroup a shall be used in subgroup b. Devices used in subgroups a and b shall be used in subgroups c, d, and e. (Sample 50 units: subgroup a - 25 units; subgroup f - 25 units).

7/ Tests within each subgroup shall be performed in the sequence shown.

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 20260-23T02:38Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection

4. 4.1 Inspection lot formation. Inspection lot formation shall be as defined in MIL-M-38510 for Class B devices.

4.4.2 Examinations

a. Quality conformance inspection. Quality conformance inspection shall consist of the inspections specified for Group A and Group B and when “required Group C. Quality conformance inspection requirements shall be in accordance with the Classification of Defects and Tests specified in 4.4.2.1 of TABLE IV.

b. Inspection requirements. Inspection requirements for this device shall be in accordance with the requirements of MIL-M-38510 and MIL-STD-883, Method 5005 for Groups A, B, and C tests except as modified herein. See 4.4.2.1 of TABLE IV.

c. Screening. Screening shall be performed on all devices in accordance with the inspection flow specified in TABLE II.

d. Sampling. Inspection samples of devices required by this specification shall be randomly selected from each inspection lot in accordance with Appendix B-1 of MIL-M-38510.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:38Z
Check the source to verify that this is the current version before use.

TABLE IV. Quality Conformance Inspection

CLASSIFICATION OF DEFECTS & TESTS

MIL-M-63223A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.1	Microcircuit, Linear, Voltage Comparators				9292967
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Screening		100%	3.5.2	Table II, 4.5.1 herein
	Group A (Each lot) 1/				
	Electrical parameters @ -55° ± 5°C		LTPD 7%	3.5.1	Table I herein
	Electrical parameters @ +85° ± 5°C		LTPD 7%	3.5.1	Table I herein
	Physical dimensions	4	0-1	3.4	MIL-STD-883, Method 2016
	Group B (Each lot) 4/				
	Resistance to solvents	3	0-1	3.4	MIL-STD-883, Method 2015
	Bond strength 2/		LTPD 15%	3.4	MIL-STD-883, Method 2011, D
	Solderability 3/		LTPD 15%	3.4	MIL-STD-883, Method 2003
	Lead integrity	2	0-1	3.4	MIL-STD-883, Method 2004, B1
	Group C (Every 90 days) 5/				
	Mechanical shock		LTPD 15%	3.4	MIL-STD-883, Method 2002, B
	Vibration, variable frequency		LTPD 15%	3.4	MIL-STD-883, Method 2007, A
	Seal (fine leak)		LTPD 15%	3.4	MIL-STD-883, Method 1014, A or B
	Seal (gross leak)		LTPD 15%	3.4	MIL-STD-883, Method 1014, C
	Electrical parameters @ 25 ± 5°C		LTPD 15%	3.5.1	Table I herein
	External visual		LTPD 15%	3.4, 3.6, 3.10	MIL-STD-883, Method 2009

NOTES:
1/ Samples shall be randomly selected from units screened above.
2/ LTPD sample size is the number of bond pulls selected from a minimum of 10 devices.
3/ LTPD applies to the number of leads inspected except in no case shall less than 3 devices be used to provide the number of leads required.
4/ Samples from lots that passed Group A inspection.
5/ Samples from lots that passed Group A & B inspection.

NOTES:

DPSC-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 20260-23T02:38Z
Check the source to verify that this is the current version before use.

4.4.3 Testing. Testing is described in the First Article and Quality Conformance Inspection Tables.

4.4.4 Inspection equipment. The inspection equipment required to perform the examinations and tests prescribed herein is described in the Paragraph Reference/Inspection Method column in Tables III and IV. The contractor shall submit for approval inspection equipment designs in accordance with the terms of the contract (see 6.4).

4.5 Test methods, circuits and procedures. The contractor shall submit to the qualifying agency (6.4) for approval the test circuits and procedures to be used to measure the electrical characteristics of the device as specified in TABLE I. The information submitted shall identify the loading conditions on all device pins, the dynamic drive signal characteristics (type, magnitude, frequency, rise time, duration, fall time) applied to the device during each test, and the type of equipment used to make the measurement and how it is connected to the device under test.

4.5.1 Screening, Screening of devices shall be conducted as specified in Table II, in the sequence shown, using only Government approved test equipment. Devices which fail any of the acceptance test criteria during the screening procedure shall be removed from the lot at the time of observation or intermediately at the conclusion of the test in which the failure was observed. Testing is non-destructive and only devices that pass all of the screening tests of Table II shall be returned to the lot, (Non-destructive).

4.5.2 Steady state life. Devices shall be subjected to the steady state life test in accordance with MIL-STD-883, Method 1005, Condition D, and as specified herein. Test duration shall be 1000 hours minimum at 125°C + 5°C. For this test the device shall be connected as shown in Figure 1; the same test set up as for the burn-in test. Electrical parameters shall be measured before, during (see 3.5.3) and after the steady state life test in accordance with Method 1005. Observation shall be made for compliance with requirements of Table I and 3.5.3. (Non-destructive).

4.5.3 Data requirements. The contractor shall submit a quality inspection test, demonstration and evaluation report giving all detailed inspection and test results in accordance with Data Item Description DI-R-1724 (Tailored). Test report shall be submitted to the technical agency listed in 6.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:38Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging and packing

5 .1.1 Packaging. The device shall be packaged in accordance with Level C of MIL-M-55565.

5.1.2 Packing. The device shall be packed in accordance with Level C of MIL-M-55565.

5.1.3 Marking. The packed components shall be marked in accordance with the requirements of MIL-STD-1188.

5.1,4 Shipping. When devices from more than one lot are shipped together, each lot shall be kept separate, and the divisions between lots clearly indicated to prevent mixing of lots in transit. Electrostatic discharge protection in accordance with the requirements of MIL-M-55565 shall be provided.

6. NOTES

6.1 Intended use. The devices covered by this specification are intended for single-use, non-repairable, military items.

6.2 ordering data. The procurement document shall specify the following:

a. Title, number and date of this specification.

b. Provisions for submission of first article samples.

c. Quantity required and delivery schedules.

d. First article inspection, and quality conformance inspection and packaging requirements , if other than as specified in this specification.

e. Certificates of conformance for each lot or shipment of product.

6.3 Contract data requirements

a. Contract data requirements for inspection equipment designs shall conform to data item description DI-E-1118 or DI-R-1714 with the appropriate addendum to each.

b. Lot traveler cards shall be submitted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:38Z
Check the source to verify that this is the current version before use.

c. Process control documents shall be submitted in accordance with DI-P-1604 (Mod) with attachment 1 listed on DD Form 1423 incorporated in the contract.

6.4 Submission of inspection equipment designs for approval. Design responsibility for all inspection equipment is assigned to the contractor, who shall submit these designs (see 4.4.4, 4.5) for approval in accordance with the stipulations, time frame and distribution specified in the Contract Data Requirements list (DD Form 1423) or in the contract to: Commander, U.S. Army Armament Research and Development Command, ATTN: DRDAR-QAA-I, Dover, New Jersey 07801.

6.5 Distribution of data (Lot traveler cards, inspection and test results). In addition to the normal distribution" of records, one copy of all data (see 3.7) shall be forwarded to: Commander, ARRADCOM, ATTN: DRDAR-QAA-M, Dover, New Jersey 07801. (The information requested in 3.7 and 4.5.3 shall be forwarded to this address).

6.6 Submission of process control documents. Process control documents as specified in 3.8 shall be submitted in accordance with DI-P-1604 (Mod) with attachment 1, listed on DD Form 1423 incorporated in the contract.

6.7 Drawings, Drawings listed in Section 2 of this specification under the heading US Army Armament Research and Development Command (ARRADCOM) may also include drawings prepared by, Rock Island Arsenal, or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under cognizance of ARRADCOM.

6.8 Changes from previous issue. Due to the extensiveness of the changes, asterisks are not used in this revision to identify changes with respect to the previous issue.

Custodian:
Army-AR

Preparing Activity
Army-AR

Project No.: 1345-A150

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:38Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:38Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE. This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-M-63323A MICROCIRCUIT, LINEAR, VOLTAGE COMPARATORS

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 202610-23T02:38Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Armament R&D Command
ATTN: DRDAR-QAA
Dover, New Jersey 07801

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:38Z
Check the source to verify that this is the current version before use.