
INCH-POUND
MIL-PRF-83287/1D
w/AMENDMENT 3
20 February 2026
SUPERSEDING
MIL-PRF-83287/1D
w/AMENDMENT 2
23 January 2019

PERFORMANCE SPECIFICATION SHEET


INDICATORS, FAULT LOCATING, FLAG INDICATING, MECHANICAL RESET

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist
of this specification sheet and MIL-PRF-83287.

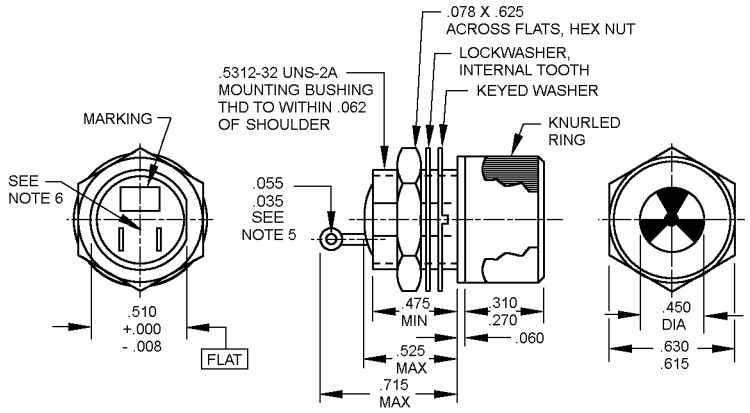

SOLDER TERMINALS

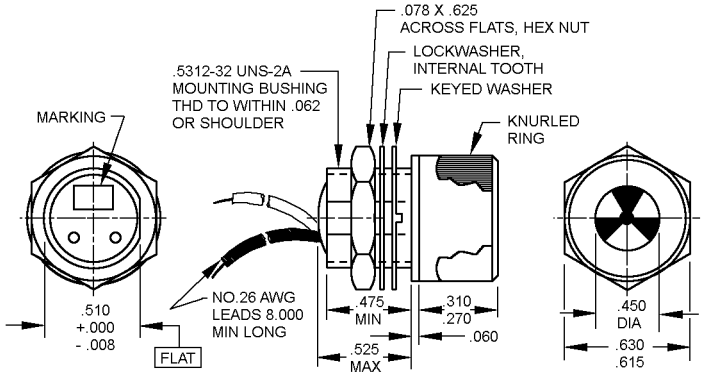


WIRE LEADS

FIGURE 1. Dimensions and configurations.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FSC 6625

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:45Z
Check the source to verify that this is the current version before use.

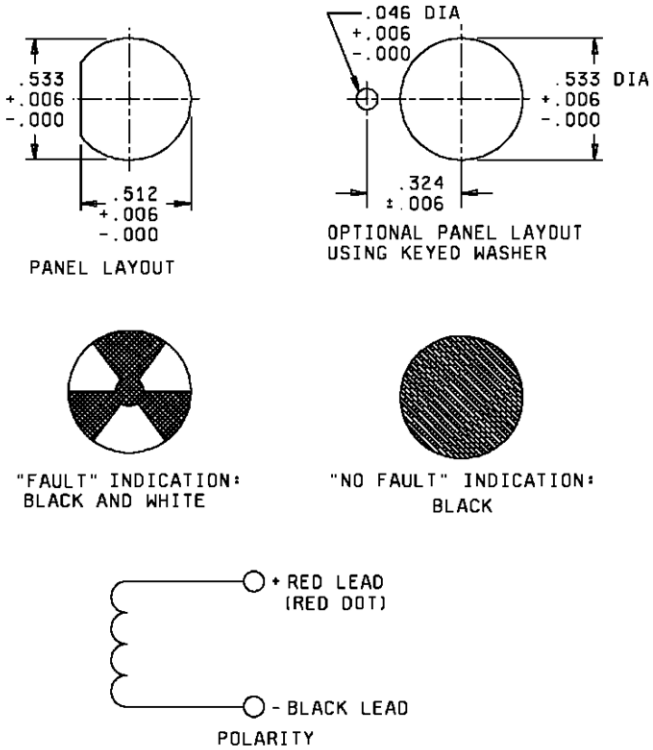

Inches	mm
.006	0.15
.008	0.20
.035	0.89
.046	1.17
.055	1.40
.060	1.52
.062	1.57
.078	1.98
.250	6.35
.310	7.87
.324	8.23
.450	11.43
.475	12.07
.510	12.95
.512	13.00
.515	13.08
.5312	13.492
.533	13.54
.615	15.62
.625	15.88
.630	16.00
.715	18.16
8.000	203.20

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ± .005 (0.13 mm).
4. The flag and the flat on the mounting bushing shall be aligned approximately as shown.
5. The shape and location of the solder terminal shown is not intended to limit specific manufacturing processes. When the shape of terminal in the schematic is used, the hole diameter shall be as shown.
6. The positive terminal on the Solder Terminals shall be identified by a red dot. The positive polarity on the Wire Leads shall be identified by a Red Wire Jacket color.
7. Mounting torque: 5 to 7 in-lbs

FIGURE 1. Dimensions and configurations – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:45Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and characteristics: See figure 1 and table I.

Weight (including hardware): 0.031 pound (14 grams), maximum.

Transfer pulse length: A pulse length of 40 milliseconds or greater shall cause a fault indication. A pulse length of 2 milliseconds or less shall not cause a fault indication. See voltages in table I.

Terminal strength (MIL-STD-202-211):

Rigid-type solder terminals:	Test condition A (3 pounds, minimum).
Wire-type solder terminals:	Test condition A (3 pounds, minimum). Test condition C (1 pound, minimum).

Marking of solder terminals: The positive terminal shall be identified by a red dot.

Extent of qualification: Qualification testing and approval of M83287/01-01, M83287/01-29 and M83287/01-36 shall be sufficient to grant qualification approval for all indicators covered by this specification sheet. Qualification testing and approval of M83287/01-01 and M83287/01-28 shall be sufficient to grant qualification approval for dash numbers 01 through 28. At least one example of both wire leads and solder terminals must be present if qualification is desired for both types of indicator.

Part or Identifying Number (PIN): M83287/01- (dash number from table II).

Random vibration (dash numbers 29 through 36 only): MIL-STD-202-214, Test condition D, curve 1, 30 minutes test time.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:45Z
Check the source to verify that this is the current version before use.

TABLE I. Indicator characteristics.

Military PIN M83287/01-	Voltage (volts, dc)			DC coil resistance (ohms) at						Anti-reflection coating	Termination type
	Rated	Operating		-65°C		+125°C		Ambient (+25°C)			
		Min 1/	Max	Min	Max	Min	Max	Min	Max		
01	3	2.4	3.6	4.8	12	12	27	8.5	18	No coating	Wire leads
02											Solder terminals
03										With coating	Wire leads
04											Solder terminals
05	5	4.0	6.0	13	34	30	73	22	52.8	No coating	Wire leads
06											Solder terminals
07										With coating	Wire leads
08											Solder terminals
09	6	4.8	7.2	19.8	50	45.7	107	33	77	No coating	Wire leads
10											Solder terminals
11										With coating	Wire leads
12											Solder terminals
13	12	9.6	14.4	78	198	180	420	130	303	No coating	Wire leads
14											Solder terminals
15										With coating	Wire leads
16											Solder terminals
17	24	19.2	28.8	318	572	734	1223	530	880	No coating	Wire leads
18											Solder terminals
19										With coating	Wire leads
20											Solder terminals
21	28	22.4	30.0	432	869	997	1850	720	1331	No coating	Wire leads
22											Solder terminals
23										With coating	Wire leads
24											Solder terminals
25 2/	28	16.0	30.0	216	796	499	1703	360	1225	No coating	Wire leads
26 2/											Solder terminals
27 2/										With coating	Wire leads
28 2/											Solder terminals
Indicators below have vibration characteristics											
29	5	4.0	6.0	13.2	34	30	73	22	52.8	No coating	Wire leads
30											Solder terminals
31										With coating	Wire leads
32											Solder terminals
33	24	19.2	28.8	318	572	734	1223	530	880	No coating	Wire leads
34											Solder terminals
35										With coating	Wire leads
36											Solder terminals

1/ Refers to the minimum operating voltage, at which the indicator must operate.
2/ For use with non-regulated power systems (see MIL-STD-704).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:45Z
Check the source to verify that this is the current version before use.

TABLE II. Cross-reference.

Superseding military PIN M83287/01-	Superseded military PIN	
01	M83287-01	M81663/2-01
02	---	
03	M83287-02	
04	---	
05	M83287-03	
06	---	
07	M83287-04	
08	---	
10	---	
11	M83287-06	
12	---	
13	M83287-07	M81663/2-03
14		
15	M83287-08	
16	---	
17	M83287-09	M81663/2-04
18	---	
19	M83287-10	
20	---	
21	M83287-11	M81663/2-05
22	---	
23	M83287-12	
24	---	
25	M83287-15	
26	---	
27	M83287-16	
28	---	
Indicators below have vibration characteristics		
29	M83287-03	
30	---	
31	M83287-04	
32	---	
33	M83287-09	M81663/2-04
34	---	
35	M83287-10	
36	---	

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-PRF-83287, this document references the following:

MIL-STD-202-211
MIL-STD-202-214
MIL-STD-704

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:45Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – AV
Navy – AS
Air Force – 85
DLA – CC

Preparing activity:
DLA - CC

(Project 6625-2026-004)

Review activities:
Army – MI
Air Force – 84

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:45Z
Check the source to verify that this is the current version before use.