DDD-A-616G
April 15, 1977
SUPERSEDING
Fed. Spec. DDD-A-616F
January 15, 1970

FEDERAL SPECIFICATION

APRONS, FOOD HANDLERS'

This specification was approved by the Commissioner, Federal Supply Services, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the requirements for aprons made from cotton drill.

1.2 Classification.

1.2.1 Types and sizes. The aprons shall be of three types in the following sizes (see 6.2):

Type I	-	One-piece bib apron, with tie loops, and separate tie and neck tapes
Size 1	-	46 inches long (117 cm)
Size 2	-	35 inches long (89 cm)
Type II	-	One piece bib apron, with self-cloth neckband, tie loops and separate tie tapes
Size 1	-	46 inches long (117 cm)
Size 2	-	42 inches long (107 cm)
Size 3	-	38 inches long (97 cm)
Size 4	-	35 inches long (89 cm)
Type III	-	One-piece apron, with self-cloth waistband, tie loops and separate tie tapes (without bib and neckband)
Size 1	-	30-1/2 inches long (77 cm)

FSC 8415

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issues in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

Federal Specifications:

V-T-276	-	Thread, Cotton
V-T-280	-	Thread, Gimp Cotton, Buttonhole
UU-P-268	-	Paper, Kraft, Wrapping
CCC-C-426	-	Cloth, Drill, Cotton
DDD-L-20	-	Label; for Clothing, Equipage, and Tentage, (General Use)
DDD-T-86	-	Tape, Textile: Cotton, General Purpose (Unbleached, Bleached, or Dyed)
PPP-T-45	-	Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing

Federal Standards:

FED-STD-123	-	Marking for Shipment (Civil Agencies)
FED-STD-191	-	Textile Test Methods
FED-STD-751	-	Stitches, Seams, and Stitchings

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal specifications required by activities outside the Federal Government for bidding purposes are available from Business Service Centers without charge at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, San Francisco, Los Angeles and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications and Standards and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

Military Specification:

MIL-B-17757 - Boxes, Shipping, Fiberboard, (Modular Sizes)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

LAWS AND REGULATIONS

Rules and Regulations Under the Textile Fiber Products Identification Act

(Copies may be obtained free of charge from the Federal Trade Commission, Washington, DC 20580.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids shall apply.

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Associations, Inc., Traffic Department, 1616 P Street, N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the supplier (see 6.3). Variation from the specification may appear in the sample in which case the specification shall govern.

3.2 Materials.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

3.2.1 Basic cloth. The basic cloth shall be cotton drill cloth, white or khaki as specified (see 6.2), conforming to types I, II or III, class 3 of CCC-C-426, except that dyed cloth shall show colorfastness to light and laundering.

3.2.2 Thread. The thread for seaming and stitching the aprons shall be cotton machine thread, type IA2 or IA3, ticket No. 30, 3-ply and 50, 3-ply, dyed Khaki P-1, C.A. 66019 or white, as required, conforming to V-T-276.

3.2.2.1 Colorfastness. The dyed thread shall show colorfastness to light and combined laundering and bleaching equal to or better than the standard sample. When no standard sample is available, the dyed thread shall show "good" colorfastness to light and laundering (after 3 cycles).

3.2.3 Gimp. The cotton gimp for reinforcing buttonholes shall be type I or II, No. 8, dyed Khaki P-1, C.A. 66019 or white, as required, conforming to V-T-280.

3.2.3.1 Colorfastness. The dyed gimp shall show colorfastness to combined laundering and bleaching equal to or better than the standard sample. When no standard sample is available, the dyed gimp shall show good colorfastness to laundering (after 3 cycles).

3.2.4 Tape. The tape required for types I, II and III aprons shall be as specified (see 6.2) and shall be made of nylon or cotton conforming to requirements of 3.2.4.1 and 3.2.4.2, respectively.

3.2.4.1 Tape, nylon. The nylon tape for white aprons shall be made of undyed yarns and for khaki aprons shall be made of dyed yarns approximating the shade of the basic cloth. The tape shall be 1/2 $\pm$ 1/16 inch (13 $\pm$ 2 mm) wide, consisting of not less than 66 total warp yarns and not less than 42 filling yarns per inch (25 mm), and shall have a breaking strength of not less than 150 pounds (667.5 N) in the warp direction. One gross (144 yards) (132 m) shall weigh not less than 10.5 ounces (298 g). The tape shall have a herringbone weave with not less than 33 ends left hand twill and 33 ends right hand twill. Testing shall be as specified in 4.2.1.

3.2.4.1.1 Colorfastness. The dyed nylon tape shall show "good" colorfastness to light and laundering (after 3 cycles) requirements when tested as specified in 4.2.1.

3.2.4.2 Tape, cotton. Cotton tape shall conform to type I, class 2 or 3, 1/2 inch (13 mm) wide of DDD-T-86. The tape shall be bleached for white aprons and dyed a matching khaki shade for khaki aprons. The colorfastness to light and laundering (after 3 cycles) requirements shall apply to the dyed tape.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

3.2.5 Label. Each apron shall have an identification label conforming to type I, III or IV, as specified (see 6.2), class 1 of DDD-L-20, except that the type, size, length and stock number shall be included in the label. Colorfastness to laundering requirements shall apply.

3.2.5.1 Fiber identification. Each apron procured by civil agencies shall be labeled or ticketed for fiber content in accordance with the Rules and Regulations under the Textile Fiber Products Identification Act (see 2.1).

3.3 Patterns. Standard patterns will be furnished by the Government and shall not be altered in any way and are to be used as a guide for cutting the supplier's working patterns. The working patterns shall be identical to the standard patterns.

3.3.1 List of pattern parts. The aprons shall be cut from the material specified and in accordance with the pattern parts indicated.

Material	Pattern nomenclature	Cut parts
Cotton drill cloth	Type I apron	
	Size 1	1
	Size 2 1/	-
	Type II apron	
	Size 1	1
	Size 2	1
	Size 3	1
	Size 4 1/	-
	Type III apron	
	Size 1	1

1/ No pattern parts are furnished.

3.4 Construction.

3.4.1 Stitches, seams, and stitchings. The stitch, seam, and stitching types specified in table I shall conform to FED-STD-751.

3.4.2 Thread breaks and ends of seams. Ends of all seams and stitching, when not caught in other seams or stitching, shall be backtacked not less than 1/4 inch (6 mm). Thread breaks shall be secured by stitching back of each end not less than 1/2 inch (13 mm). The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch (13 mm), except labels which shall overlap at least 3 stitches.

3.4.3 Stitches per inch. The minimum and maximum number of stitches per inch (cm) shall be as specified in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

3.4.4 Buttonholes. Buttonholes shall be the eyelet-end, taper-bar type, worked over gimp, with not less than 4 tacking stitches at bar end (not counting cross-over stitch) and shall finish 5/8 to 3/4 inch (16 to 19 mm) in length.

3.5 Manufacturing operations requirements. The aprons shall be manufactured in accordance with operation requirements specified in table I. The supplier is not required to follow the exact sequence of operations. Any additional basting or holding stitching is permissible provided the thread does not show in the finished garment.

3.5.1 Figures. Figures are furnished for information only. In any case where inconsistencies occur between the figure and the written specification, the written specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

NO.	TABLE I MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH (cm)	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cut apron.						
	a. Cut the apron in strict accordance with patterns furnished. When aprons are cut on the selvage, the side edges need not be turned in, but the finished widths shall conform to table II.						
	b. The tie loops, neckband and waistband made of basic cloth may be cut from ends. Parts cut from ends shall approximate the shade of the basic cloth (applicable to dyed material only).						
2.	Replacement of defective components.						
	During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in 4.2.2.1 shall be removed from production and replaced with nondefective and properly matched components.						
3.	Attach label (all types).						
	a. (Types I and II apron). Apply or stitch cloth label on all four sides to the back (underside) of apron at the upper right corner adjacent to the side edge and below the tie loop (or buttonhole, type I only).	301	LSbj-1	10-14 (4-6)	30-3	30-3	
	b. (Type III apron). Apply or stitch cloth label on all four sides to the back (underside) of apron on upper right hand corner on waistband.	301	LSbj-1	10-14 (4-6)	30-3	30-3	
	NOTE: The stitching shall not be through the printing of the label.						
	Make type I apron:						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

NO.	TABLE I MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH (cm)	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Cut tie loops, when applicable.						
	a. Cut the nylon tie loops of sufficient length to finish 1-1/2 ± 1/8 inches (38 ± 3 mm) long.						
	- or -						
	b. Cut tie loops from basic cloth of sufficient length to finish 1-1/2 ± 1/8 inches (38 ± 3 mm) long and 1/2 ± 1/16 inch (13 ± 2 mm) wide.						
5.	Make tie loops (basic cloth).						
	Fold tie loops in half widthwise, turn in raw edges between plies and double stitch 1/4 to 5/16 inch (6 to 8 mm) gage with outer row of stitching 1/16 to 1/8 inch (2 to 3 mm) from edges.	301	EFp-2	10-14 (4-6)	30-3	30-3	
6.	Hem apron.						
	a. Turn in sides 1/2 to 5/8 (13 to 16 mm) with the raw edges turned in and stitch 1/16 to 1/8 inch (2 to 3 mm) from edges (see operation 1.a.).	301	EFb-1	10-14 (4-6)	30-3	30-3	
	b. Turn in top edge of bib 1 ± 1/8 inch (25 ± 3 mm) with the raw edge turned in and stitch 1/16 to 1/8 inch (2 to 3 mm) from edge.	301	EFb-1	10-14 (4-6)	30-3	30-3	
	c. Turn in bottom edge 1/2 ± 1/8 inch (13 ± 3 mm) with the raw edge turned in and stitch 1/16 to 1/8 (2 to 3 mm) from edge.	301	EFb-1	10-14 (4-6)	30-3	30-3	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

NO.	TABLE I MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH(cm)	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
7.	Attach tie loops (basic cloth or nylon tape) or make buttonholes.						
	a. Fold four tie loops in half lengthwise. Turn in underarm edges 1/2 to 5/8 inch (13 to 16 mm) with raw edge turned in, inserting raw edges of one tie loop at each end of underarm hem and stitch 1/16 to 1/8 inch (2 to 3 mm) from edge. The line of stitching may be continued across each end of hem to hold the tie loops in position.	301	EFb-1	10-14 (4-6)	30-3	30-3	
	b. Place one bartack through each hem and loop 1/8 to 1/4 inch (3 to 6 mm) from and parallel to top edge of bib or sides. Place a second bartack 1/4 to 3/8 inch (6 to 10 mm) from and parallel to each of the first bartacks (8 total bartacks).	Bartack		28 per bartack	30-3	30-3	
	- or -						
	c. Buttonholes may be used in lieu of tie loops with the inside edges of eyelets 1-1/4 to 1-1/2 inches (31 to 38 mm) from edges of bib and side hems centered (± 1/8 inch (3 mm) off center tolerance) on the underarm hems. When sides are selvaged, the edge of eyelets shall be 1/2 to 3/4 inch (13 to 19 mm) from selvage edges.	Buttonhole		48 to 56 per buttonhole including tack	30-3	30-3	
	Make type II apron:						

Source: https://assist.dla.mil - Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

NO.	TABLE I MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH(cm)	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Cut neckband and tie loops.						
	a. Cut the neckband from basic cloth in one continuous length or in two pieces with seam allowances added to each width. The neckband shall be cut to finish 21 ± 1/2 inches (533 ± 13 mm) long and 1-3/8 ± 1/8 inches (35 ± 3 mm) wide.						
	b. Cut the tie loops in one strip from basic cloth to finish 1/2 ± 1/16 inch (13 ± 2 mm) wide and of sufficient length to conform to operation 10.b.						
9.	Make neckband.						
	a. Join neckband when neckband is cut in two pieces.	301	SSa-1	10-14 (4-6)	30-3	30-3	
	b. Fold neckband in half widthwise with the side raw edges turned in and stitch 1/16 to 1/8 inch (2 to 3 mm) from each side edge.	301	EFp-2	10-14 (4-6)	30-3	30-3	
10.	Make tie loops:						
	a. Fold the tie loops in half widthwise with the side raw edges turned in and stitch 1/16 to 1/8 inch (2 to 3 mm) from edge, with the stitching continued along folded edge.	301	EFp-2	10-14 (4-6)	30-3	30-3	
	b. Fold strip in half lengthwise with the ends superimposed, and stitch across the width of loop 2-5/8 ± 1/8 inches (66 ± 3 mm) from folded edge with the stitching backstitched the full width of the tie loops.	301	SSa-1	10-14 (4-6)	30-3	30-3	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

NO.	TABLE I MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH(cm)	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
11.	Hem apron and attach neckband:						
	a. Hem bottom and underarms of apron with raw edges turned in forming hem 1/2 ± 1/8 inch (13 ± 3 mm) wide.	301	EFb-1	10-14 (4-6)	30-3	30-3	
	b. Turn in sides 1/2 to 5/8 inch (13 to 16 mm) with the raw edges turned in and stitch 1/16 to 1/8 inch (2 to 3 mm) from edge (see operation 1.a).	301	EFb-1	10-14 (4-6)	30-3	30-3	
	c. Hem top of bib 1 ± 1/8 inch (25 ± 3 mm) wide with the raw edges turned in and the ends of the neckband inserted in the bib hem the full width of the hem and folded back over the hem for stitching.	301	EFb-1	10-14 (4-6)	30-3	30-3	
12.	Reinforce neckband.						
	a. Tack the folded ends of the neckband with a cross box stitching not less than 1 ± 1/8 inch (25 ± 3 mm) by 3/4 ± 1/8 inch (19 ± 3 mm) in size with the rows of diagonal stitching crossing at center. The operation may be performed on an automatic machine. The stitching shall overlap at least three stitches.	301		10-14 (4-6)	30-3	30-3	
	- or -						
	b. Each end of the neckband may be finished with three 1/2 to 5/8 inch (13 to 16 mm) bartacks positioned as follows:	Bartack		28 per bartack	30-3	30-3	
	(1) One centered horizontally at top of hem 1/16 to 1/8 inch (2 to 3 mm) from top edge through hem and neckband (± 1/8 inch ± 3 mm) off center tolerance).						

Source: https://assist.dla.mil Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

NO.	TABLE I MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH (cm)	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
12.	Reinforce neckband. (cont'd) (2) One vertically positioned 1/16 to 1/8 inch (2 to 3 mm) from each side edge of neckband through hem and neckband.						
13.	Make underarm hems and attach tie loops:						
	a. Lap ends of tie loop on underarm hem not less than 1 inch (25 mm) with raw edge turned under and stitch with a 1/2 inch (13 mm) box of stitching and two rows of diagonal stitching inside box from corner to corner. The stitching shall overlap at least three stitches.	301		10-14 (4-6)	30-3	30-3	
	- or -						
	b. Each tie loop may be attached to apron with two 3/8 to 1/2 inch (10 to 13 mm) bartacks positioned as follows: (1) One positioned parallel to apron edge. (2) One positioned parallel to 1/2 to 5/8 inch (13 to 16 mm) from first bartack. NOTE: Both bartacks shall catch tie loops in the stitching.	Bartack		28 per bartack	30-3	30-3	
	Make type III apron:						
14.	Cut waistband: Cut the waistband of sufficient length to allow for extending tie loops (see operation 17).						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

NO.	TABLE I MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH(cm)	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
15.	Hem apron:						
	Hem bottom and sides of apron with raw edges turned in, forming a hem 1/2 ± 1/8 inch (13 ± 3 mm) wide (see operation 1.a).	301	EFb-1	10-14 (4-6)	30-3	30-3	
16.	Make and attach waistband:						
	a. Fold waistband in half lengthwise and stitch 1/16 to 1/8 inch (2 to 3 mm) from folded edge the full length of the waistband.	301	OSf-1	10-14 (4-6)	30-3	30-3	
		or					
		401		10-14 (4-6)	30-3	30-3	
	b. Insert top edge of apron into waistband 1/2 ± 1/8 inch (13 ± 3 mm) with the waistband extending beyond each side of apron to form tie loops (see operation 17). Turn in raw edges of waistband and join waistband and apron together with a double row of stitching 1/4 to 5/16 inch (6 to 8 mm) gage, continuing to the ends of waistband. Both rows of stitching shall catch the body of apron. Thread tension shall be adjusted to prevent tight stitching and puckering. Looper thread shall face the reverse side of apron. The waistband shall finish 1-3/4 to 2 inches (44 to 50 mm) in width.	301	BSc-2	10-14 (4-6)	30-3	30-3	
		or					
		401			30-3	30-3	
17.	Finish waistband:						
	Fold ends of waistband with raw edges turned under forming a 1-3/4 to 2 inch (44 to 50 mm) loop extending beyond the sides of apron. Stitch turned under end of waistband 1/16 to 1/8 inch (2 to 3 mm) from edge with a double row of stitching 1/8 to 3/16 inch (3 to 5 mm) gage or bartack the full width of waistband.	301		10-14 (4-6)	30-3	30-3	
		or bartack		60 per	30-3	30-3	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26 12:35Z
Check the source to verify that this is the current version before use.

NO.	TABLE I MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH (cm)	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
18.	Cut and attach tie tapes:						
	a. Cut the neck tape from nylon or cotton tape (one per apron) to finish 28 ± 1 inches (710 ± 25 mm) in length (type I only).						
	b. Cut tie tapes (two per apron) from nylon or cotton tape to finish 37-1/2 ± 1 inches (950 ± 25 mm) in length (all types).						
	c. Turn in the free ends of neck and tie tapes 1/4 ± 1/16 inch (6 ± 2 mm) with raw edges turned in and stitch or bartack. When nylon tape is used, the ends shall be fused and hemming does not apply.	301 or bartack	EFb-1	10-14 (4-6) 28 per bartack	30-3 30-3	30-3 30-3	
	d. Insert the ends of neck and tie tapes in the tie loops (or buttonholes for type I, when used) and tie loosely.						
19.	Clean aprons:						
	a. Trim all thread ends and remove loose thread from aprons.						
	b. Remove all spots and stains.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

3.6 Finished measurements. The finished measurements for types I, II and III aprons shall be as shown in table II.

TABLE II. Finished measurements (inches/cm)

Measurement	Location on figures 1, 2 and 3	Type I, Size 1	Type I, Size 2	Type II, Size 1	Type II, Size 2	Type II, Size 3	Type II, Size 4	Type III Size 1	Tolerance
Length of apron (top of bib to bottom)	A	46 (117)	35 (89)	46 (117)	42 (107)	38 (97)	35 (89)		± 1/2 (1.3)
Width of apron	B	36 (91)	26 (66)	36 (91)	32 (81)	29 (74)	26 (66)	32 (81)	+ 1-1/2 (3.8) -1/2 (1.3)
Length of apron (excluding bib)	C	36-1/2 (94)	26-1/2 (69)	36-1/2 (94)	33 (84)	29 (74)	26-1/2 (69)	30-1/2 (79)	± 1/2 (1.3)
Length of bib	D	9-1/2 (24)	8-1/2 (22)	9-1/2 (24)	9 (23)	9 (23)	8-1/2 (22)		± 1/2 (1.3)
Width across bib	E	13 (33)	13 (33)	13 (33)	13 (33)	13 (33)	13 (33)		± 1/2 (1.3)
Width from edge of bib to side of apron	F	11-1/2 (29)	6-1/2 (17)	11-1/2 (29)	9-1/2 (24)	8 (20)	6-1/2 (17)		+ 3/4 (1.9) - 1/2 (1.3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

3.7 Workmanship. The finished apron shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed acceptable quality levels (AQLs).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.2.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document. In addition, testing shall be performed on components listed in table III. The methods of testing specified in FED-STD-191, where applicable and as listed in table III shall be followed. All test reports shall contain the individual values utilized in expressing the final result. The lot shall be unacceptable if one or more sample units fail to meet the requirements specified. The lot size for the nylon tape (see 3.2.4.1) shall be expressed in yards and the sample unit for testing shall be 3 yards (2.7 m). Sampling shall be in accordance with the following table:

Lot size	Sample size
800 or less	2
801 to 22,000 inclusive	3
22,001 and over	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

TABLE III. Test methods

Component	Characteristic	Requirement paragraph	Test method
Nylon tape	Identification	3.2.4.1	1530
	Width	3.2.4.1	5020
	Yarns:		
	Warp (total)	3.2.4.1	5050
	Filling per inch (cm)	3.2.4.1	5050
	Breaking strength	3.2.4.1	5100
	Weight per gross yard	3.2.4.1	5040 1/
	Weave	3.2.4.1	Visual 2/
	Colorfastness to:		
	Laundering (after 3 cycles)	3.2.4.1.1	5610
	Light	3.2.4.1.1	5660

1/ Except that the entire 3 yard (2.7 m) sample unit shall be weighed and the result multiplied by 48 to yield ounces per gross yard.

2/ One determination per sample unit with result to be reported as "pass" or "fail".

4.2.2 Examination of end item. Defects shall be classified in accordance with lists shown in 4.2.2.1 through 4.2.2.3.

4.2.2.1 General defects.

Defects	Classification Major	Minor
Material defects and workmanship damages:		
a. Any hole, needle chew, cut, tear, mend or burn	X	
b. Any weakening defect such as smash, multiple float or slub	X	
c. Any visible mend	X	

NOTE: Material defects and workmanship are to be classified as indicated above only when the condition is one which weakens the cloth or is so conspicuously located as to be clearly noticeable. Nonweakening defects, which are inconspicuous and have a negligible effect on serviceability, shall not be classified as a defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor
Shaded parts (when basic cloth is dyed):		
Any part shaded		X
Cutting:		
Any component part not cut in accordance with specification requirements	X	
Cleanness:		
a. Any spot or stain on outside		X
b. Thread ends not trimmed or loose thread ends not removed throughout apron		X
Component and assembly:		
Any component part or required operation omitted (unless otherwise classified herein)	X	
Seams and stitching:		
a. Accuracy of seaming		
1. Seam or component part twisted, puckered or pleated (unless otherwise classified herein)		X
2. Part of garment caught in unrelated operation or stitching	X	
3. End of stitching when not caught in other seam or stitching backtacked less than 1/4 inch (6 mm)		X
4. Ends of a continuous line of stitching overlapping less than 1/2 inch (13 mm), except labels which shall overlap not less than 3 stitches		X
5. Stitching overlapping each end of thread break less than 1/2 inch (13 mm)		X
b. Gage of stitching and width of seam allowance:		
1. Irregular, i.e., unevenly gaged or rows of stitching not uniform (score only when condition exists along major portion of seam)		X
2. Not width specified or not within range or gage specified or varies more than 1/16 inch (2 mm) when no range is specified		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor
Seams and stitching: (cont'd)		
c. Stitches broken or missing		X
d. Skipped stitches 1/4 inch (6 mm) or more		X
e. Runoffs 1/4 inch (6 mm) or more		X
NOTE: On double stitched seams, a seam shall be considered open when either one or both sides of the seam are open.		
f. Raw edges:		
- 1/4 to 3/4 inch (6 to 19 mm), inclusive		X
- over 3/4 inch (19 mm)	X	
NOTE: Raw edges not caught in stitching shall be classified as an open seam.		
g. Stitch tension:		
1. Loose tension resulting in a loose seam		X
2. Tight tension (stitching breaks when strain is applied to seam or stitching)	X	
h. Seam and stitch type:		
1. Seam type or stitch type not as specified		X
2. Looper thread not on reverse side of apron	X	
i. Stitches per inch:		
1. Less than minimum specified:		
- one or two stitches		X
- three or more stitches	X	
2. One or more stitches in excess of maximum specified		X
j. Bartacks:		
1. Omitted or misplaced	X	
2. Loose tension on one or more bartacks		X
3. Not length specified		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor
Seams and stitching: (cont'd)		
k. Buttonholes (when used):		
1. One or more omitted or added	X	
2. Stitching not securely caught in cloth causing stitching to pull away from cloth	X	
3. Gimp omitted in one or more buttonholes	X	
4. One or more broken stitches in:		
- one buttonhole		X
- two or more buttonholes	X	
5. More than two skipped stitches in one or more buttonholes		X
6. Not eyelet end, taper bar type, incomplete stitching or uncut buttonhole		X
7. Less than 4 tacking stitches at bar end, not counting cross-over stitch		X
8. Cut length less than 5/8 (16 mm) or more than 3/4 inch (19 mm)		X
4.2.2.2 Detailed defects for applicable types		
Type I apron:		
Tie loops (when applicable)		
a. Finishing less than 1-3/8 (35 mm) or more than 1-5/8 inches (41 mm) in length		X
b. Finishing less than 7/16 (11 mm) or more than 9/16 inch (14 mm) in width (basic cloth only)		X
c. Insert ends not caught by:		
- one bartack		X
- two bartacks	X	
d. First bartack not parallel to or less than 1/8 (3 mm) or more than 1/4 inch (6 mm) from top of bib or sides		X
e. Second bartack not parallel to or less than 1/4 (6 mm) or more than 3/8 inch (10 mm) from first bartack		X
Hems:		
a. Bottom hem less than 3/8 (10 mm) or more than 5/8 inch (16 mm)		X
b. Side hem less than 1/2 (13 mm) or more than 5/8 inch (16 mm)		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor
Hems: (cont'd)		
c. Top hem less than 7/8 (22 mm) or more than 1-1/8 inches (29 mm)		X
d. Underarm hem less than 1/2 (13 mm) or more than 5/8 inch (16 mm)		X
Neck tape:		
Cut lengths less than 27 (685 mm) or more than 29 inches (736 mm)		X
Type II apron:		
Tie loops		
a. Length of finished loop from folded edge to stitching less than 2-1/2 (63 mm) or more than 2-3/4 inches (70 mm)		X
b. Finishing less than 7/16 (11 mm) or more than 9/16 inch (14 mm) in width		X
c. End(s) of tie loop lapped on underarm hem less than 1 inch (25 mm)		X
d. Box stitching less than 1/2 inch (13 mm) (when used)		X
e. Diagonal stitching in box omitted (when box stitching is used)		X
f. First bartack not parallel to apron edge (when used)		X
g. Second bartack not parallel to or less than 1/2 (13 mm) or more than 5/8 inch (16 mm) from first bartack when used)		X
h. Bartack(s) not through tie loops (when used)		X
Neckband:		
a. Twisted in attachment to bib so that it does not lie flat at neck	X	
b. Finishing less than 1-1/4 (31 mm) or more than 1-1/2 inches (38 mm) wide		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor
Type II apron: (cont'd)		
Neckband: (cont'd)		
c. End not caught in bib hem		X
d. Box stitching less than 7/8 (22 mm) or more than 1-1/8 inches (27 mm) long or less than 5/8 (16 mm) or more than 7/8 inch (22 mm) wide		X
e. Finishing less than 20-1/2 (520 mm) or more than 21-1/2 inches (550 mm) long		X
f. Horizontal bartack (when used) off center at top of hem by more than 1/8 inch (3 mm)		X
g. Each vertical bartack not positioned 1/16 to 1/8 inch (2 to 3 mm) from each side edge of neckband		X
Hems:		
a. Bib hem less than 7/8 (22 mm) or more than 1-1/8 inches (29 mm) wide		X
b. Bottom and underarm hems less than 3/8 (10 mm) or more than 5/8 inch (22 mm) wide		X
c. Side hems less than 1/2 (13 mm) or more than 5/8 inch (16 mm) wide		X
Type III apron:		
Waistband:		
a. Finishing less than 1-3/4 (45 mm) or more than 2 inches (50 mm) in width		X
b. Both rows of stitching not catching body of apron		X
Tie loops (waistband extensions):		
a. Not constructed with ends of waistband	X	
b. Not double stitched or backtacked across full width of waistband		X
c. Length of loop from folded edge to row of stitching less than 1-3/4 (45 mm) or more than 2 inches (50 mm)		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor
Type III apron: (cont'd)		
Hems:		
Side and bottom hems less than 3/8 (10 mm) or more than 5/8 inch (16 mm)		X
Types I, II and III aprons:		
Tie tapes		
a. Cut length less than 36-1/2 (930 mm) or more than 38-1/2 inches (980 mm)		X
b. Not inserted in loops and loosely tied		X
c. Raw ends of cotton tape not turned under		X
d. Raw ends of nylon tape not fused		X
Label:		
a. Missing, incorrect or illegible		X
b. Not positioned on back (underside) of apron at upper right corner adjacent to the side edge and below the loop (or buttonhole) (Types I and II)		X
c. Not positioned on back (underside) of apron at upper right corner on waistband (Type III)		X
d. Cloth label (when used) not stitched on all four sides		X
e. Cloth label (when used) stitching through printing		X

4.2.2.3 Size measurement defects. Any measurement deviating from the dimensions and tolerances specified in table II shall be scored as a size measurement defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

4.2.3 Inspection levels and acceptable quality levels. Inspection levels and acceptable quality levels (AQLs) expressed in defects per 100 units (DHU) shall as follows:

	AQL	Inspection level
For 4.2.2.1 and 4.2.2.2		II
Major	4.0	
Total Major and Minor	15.0	
For 4.2.2.3		S-3
One class	6.5	

4.2.4 Examination of packaging requirements. An examination shall be made to determine whether packaging, packing and marking comply with section 5. Defects shall be scored in accordance with the following list. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be closed. Examination for the closure defects listed below shall be made on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

Examine	Defects
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping or inadequate stapling. Incomplete closure of polyethylene bags. Bulged or distorted container.
Content	Number of aprons per container is more or less than required. Number of aprons per bundle is more or less than required 1/

1/ For this defect, two bundles from each container in the sample shall be examined.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A, B or C, as specified (see 6.2).

5.1.1 Level A packaging. Ten aprons of one type, size, and color only, each neatly and individually folded, shall be stacked one on another to form a compact bundle. Each bundle shall be completely wrapped in 30-pound (49 g/m^2) minimum basis weight kraft paper conforming to grade B of UU-P-268. The kraft paper wrap shall be secured with 2-inch (50 mm) minimum width gummed paper tape conforming to type III, grade B of PPP-T-45. Alternatively, the aprons shall be packaged in a heat sealed polyethylene bag. The material for the bag shall be a minimum of 1.5 mils thick.

5.1.2 Level B packaging (Civil agencies). Aprons shall be packaged as specified in 5.1.1.

5.1.3 Level C. Aprons shall be packaged to afford adequate protection against deterioration and physical damage during shipment from the supply source to the first receiving activity. The packages and the quantity per package shall be the same as that normally used by the supplier for retail distribution.

5.2 Packing. Packing shall be level A, B or C, as specified (see 6.2).

5.2.1 Level A packing. One hundred and twenty aprons of type I, size 1, type II, sizes 1 or 2, type III, size 1, or 160 aprons of type I, size 2, type II, sizes 3 or 4 of one color only packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed, and reinforced conforming to class weather-resistant, grade V2s, size 3A of MIL-B-17757 except that the inspection shall be in accordance with 4.2.4. The fiberboard for the box liner shall conform to type CF, class weather-resistant, variety DW, grade V15c of MIL-B-17757. Packages shall be arranged to achieve a balanced pack within the shipping container. Toward the end of the contract or when there are less than the required amount of the same size and color, mixed sizes and colors of one type only may be packed within the same shipping container.

5.2.2 Level B packing. One hundred and twenty aprons of type I, size 1, type II, sizes 1 or 2, type III, size 1, or 160 aprons of type I, size 2, type II, sizes 3 or 4 of one color only packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to class domestic, grade 275, size 3A of MIL-B-17757 except that the inspection shall be in accordance with 4.2.4. The fiberboard for the box liner shall conform to type CF, class domestic, variety DW, grade 275 of MIL-B-17757. Packages shall be arranged to achieve a balanced pack within the shipping container. Toward the end of the contract or when there are less than the required amount of the same size and color, mixed sizes and colors of one type only may be packed within the same shipping container.

5.2.2.1 Weather-resistant container. When specified (see 6.2), the shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of the container specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

5.2.3 Level C packing. Aprons packaged as specified in 5.1, shall be packed i manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the supplier for retail distribution. Containers shall comply with the Uniform Freight Classification or National Motor Freight Classification, as applicable.

5.3 Marking. Marking shall be in accordance with 5.3.1 or 5.3.2 as specified (see 6.2).

5.3.1 Civil agencies. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with FED-STD-123.

5.3.2 Military requirements. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.3 Labels, mixed sizes and colors. Each shipping container packed with mixed sizes and colors, shall have securely attached to the end and side, directly under the printing or stencilling, a white paper label 5 by 4 inches (130 X 101 mm), with the words "MIXED SIZES AND COLORS" plainly stamped or printed thereon and under these words shall be legibly printed the correct quantity, size and color contained therein.

6. NOTES

6.1 Intended use. The aprons are intended for general purpose use by personnel of Federal Government agencies. Type III, size 1, white, is the standard item for procurement by the military departments.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number and date of this specification.
(b) Type and sizes required (see 1.2).
(c) Color required (see 3.2.1).
(d) Type of tape required (see 3.2.4).
(e) Type of label required (see 3.2.5).
(f) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(g) When weather-resistant grade fiberboard shipping containers are required for Level B Packing (see 5.2.2.1).
(h) Whether marking shall be in accordance with 5.3.1 or 5.3.2 (see 5.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

6.3 Samples. For access to sample of the end item and shade sample, address the procuring office issuing the invitation for bids.

Custodians:

Army - GL
Navy - SA
Air Force - 99

Review activities:

Army - MD
Navy - MC
Air Force - 45
DLA - CT

User activities:

Navy - YD, MS

Preparing activity:

Army - GL

Civil Agency Coordinating Activities:

GSA - FSS
JUS - FPI
VA - DMS

Project No. 8415-0206

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

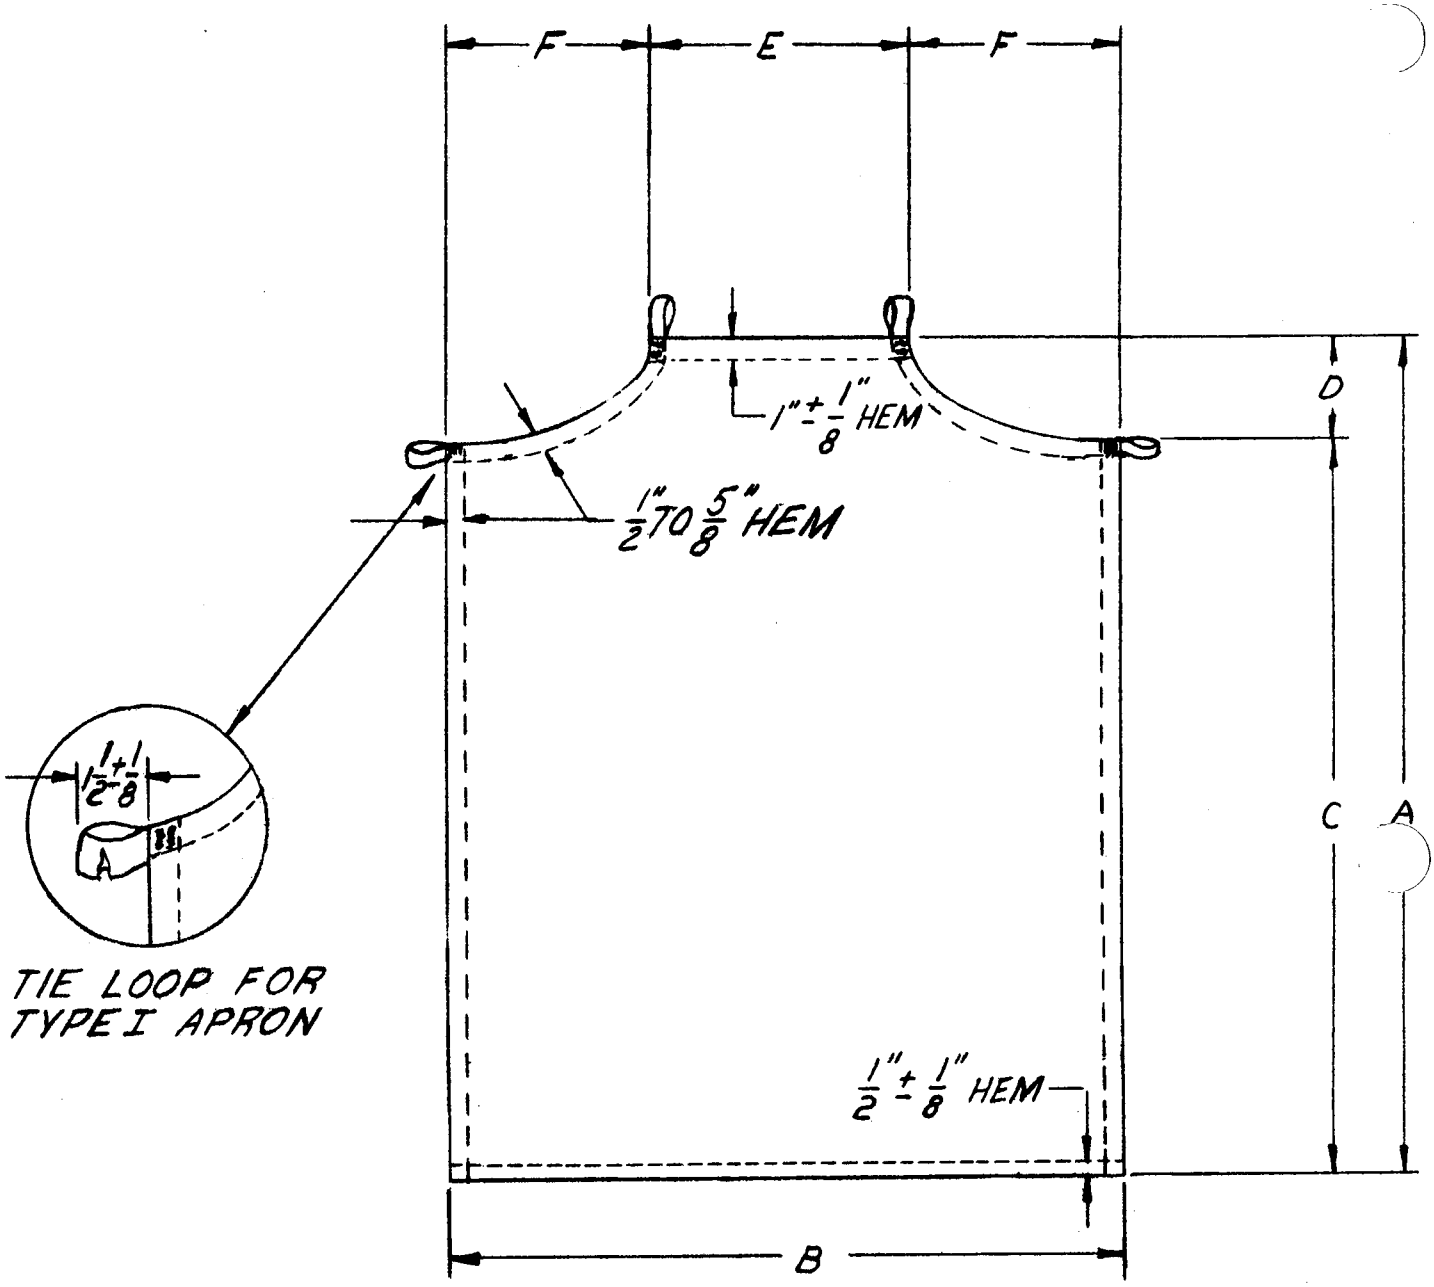


FIGURE 1-APRON, FOOD HANDLER'S; TYPE I

2-1-173-REV E

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

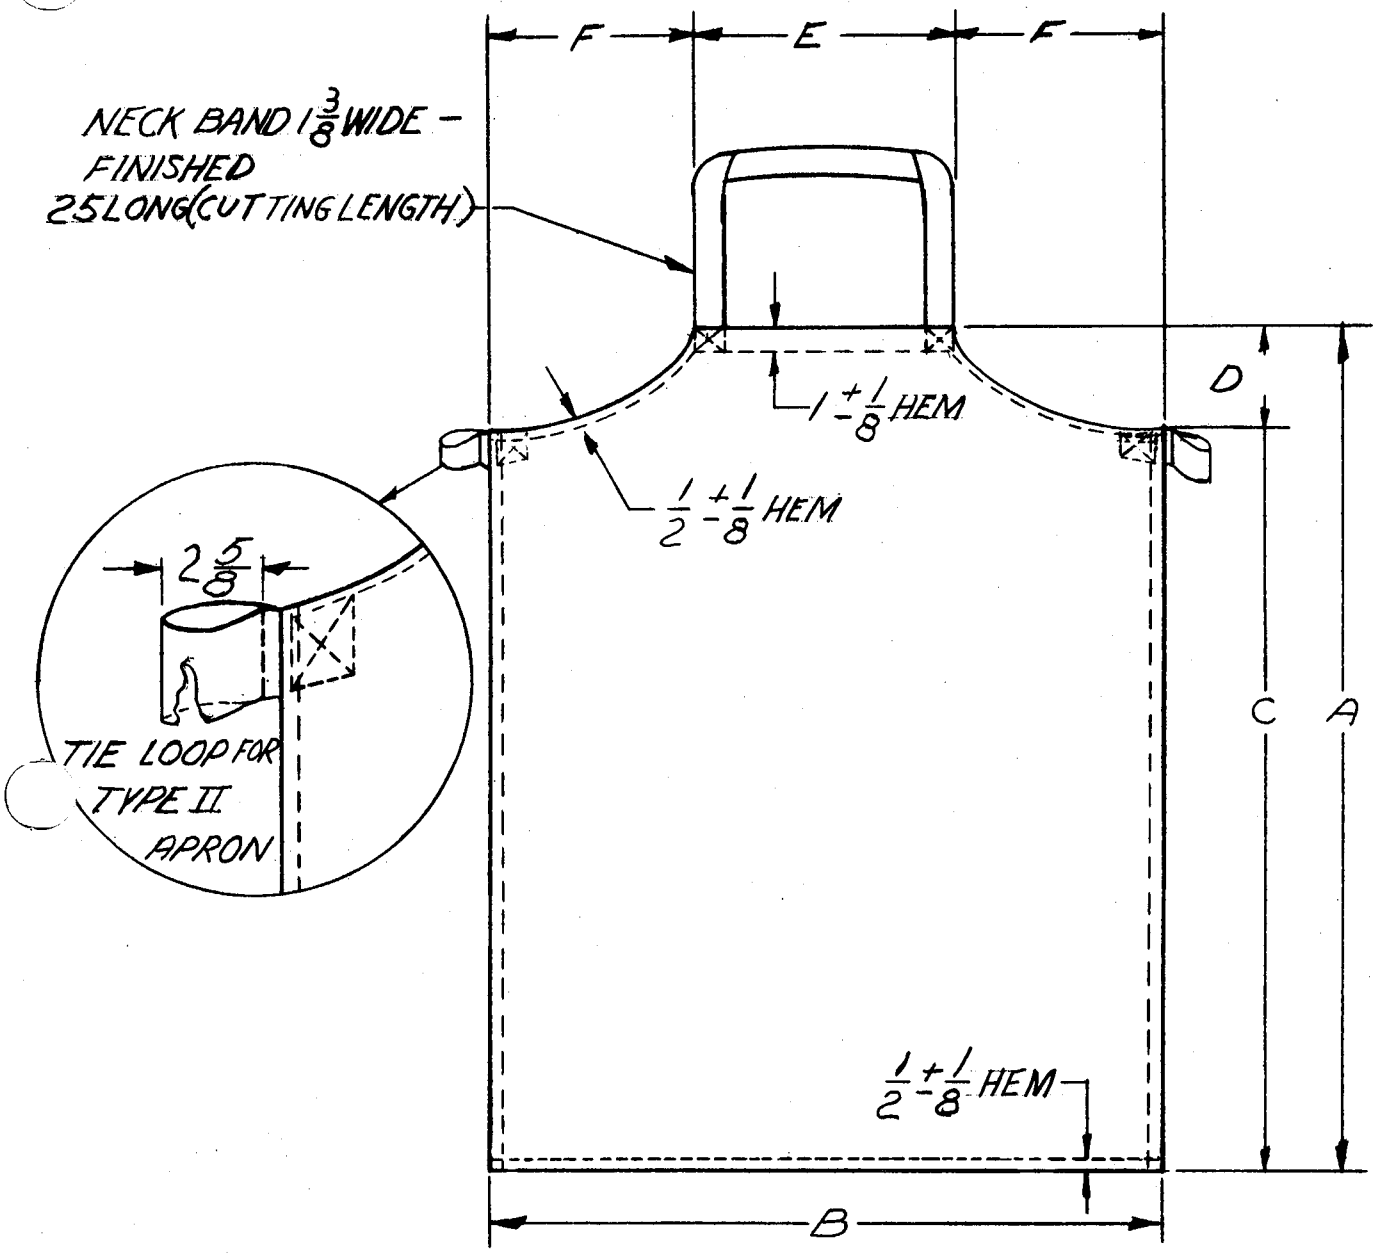


FIGURE-2-APRON, FOOD HANDLER'S; TYPE II 2-1-174 C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

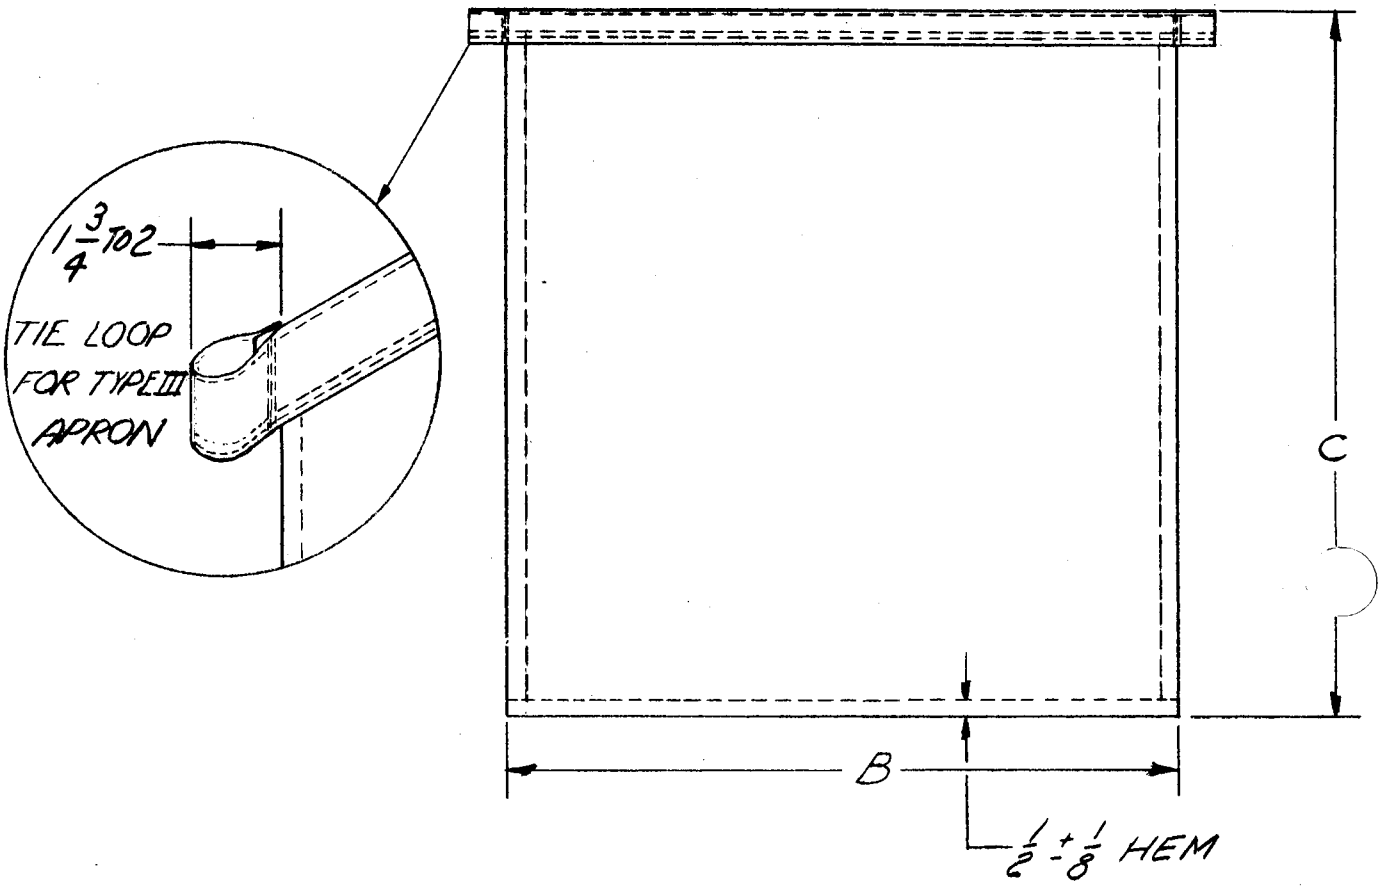


FIGURE-3- APRON, FOOD HANDLER'S TYPE III 2-1-723 B

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 65 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.