DDD-C-628F
October 30, 1981
SUPERSEDING
Fed. Spec DDD-C-628E
February 14, 1973

FEDERAL SPECIFICATION

COVER, MATTRESS

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the requirements for mattress covers primarily intended for protecting the mattress ticking from soil, stains and abrasions.

1.2 Classification.

1.2.1 Types, sizes and classes. The mattress covers shall be of the following types, sizes and classes as specified (see 6.2):

Type I	-	Boxed corners, slit opening.
Sizes	-	1 through 6, 8, 10 through 12, and 14.
Type II	-	Set-in-box, flap opening.
Sizes	-	2 through 9 and 12 through 17.
Type III	-	Envelope.
Sizes	-	1 through 10.
Class 1	-	Drill - Unbleached
Class 2	-	Sheeting - Cotton (Unbleached), or Polyester-Cotton (Bleached).
Class 3	-	Sheeting - Cotton (Bleached); or Polyester-Cotton (Bleached).

FSC 7210

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

V-T-276	-	Thread, Cotton.
UU-P-268	-	Paper, Kraft, Wrapping.
CCC-C-426	-	Cloth, Drill, Cotton.
CCC-C-430	-	Cloth, Sheeting, Cotton and Polyester and Cotton.
DDD-L-20	-	Label: For Clothing, Equipage, and Tentage, (General Use).
DDD-T-86	-	Tape, Textile; Cotton, General Purpose (Unbleached, Bleached or Dyed).
PPP-B-636	-	Boxes, Shipping, Fiberboard.

Federal Standards:

FED-STD-123	-	Marking for Domestic Shipment (Civil Agencies).
FED-STD-191	-	Textile Test Methods.
FED-STD-751	-	Stitches, Seams and Stitchings.

(Activities outside the Federal Government may obtain copies of Federal specifications, standards, and commercial item descriptions as outlined under General Information in the Index of Federal Specifications, Standards and Commercial Item Descriptions. The Index, which includes cumulative bimonthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, US Government Printing Office, Washington, DC 20402.

(Single copies of this specification, other Federal specifications, standards, and commercial item descriptions required by activities outside the Federal Government for bidding purposes are available without charge from General Services Administration Business Service Centers in Boston, New York, Washington, DC, Philadelphia, Atlanta, Chicago, Kansas City, MO, Fort Worth, Houston, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal specifications, standards, and commercial item descriptions, and the Index of Federal Specifications, Standards and Commercial Item Descriptions from established distribution points in their agencies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

Military Specifications:

MIL-F-10884	-	Fasteners, Snap.
MIL-C-43791	-	Cloth, Twill, Polyester/Cotton (Durable Press).

Military Standards:

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	-	Marking for Shipment and Storage.
MIL-STD-1188	-	Commercial Packaging of Supplies and Equipment.
MS-16686	-	Medical Services Symbol.

(Copies of Military specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials.

3.1.1 Class 1. The basic material of the class 1 cover shall be unbleached cotton drill conforming to type I, class 2 of CCC-C-426 except that a maximum of 3.0 percent shrinkage in either the warp or filling direction will be allowed. The twill or face side of the fabric shall be on the outside of the cover. As an alternate basic material, type II of MIL-C-43791 with the following exceptions will be allowed:

a. Yarns per inch shall be a minimum of 84 by 45.

b. Cloth preparation. The cloth shall be desized and scoured. The cloth may be mercerized, bleached, heat set or preshrunk. If presnrunk, the preshrinking process used shall not be identified by name or trademark on the cloth, ticket, or package.

c. Nonfibrous materials. The starch and protein content including chloroform soluble and water soluble material of the finished cloth shall not exceed 5.0 percent.

d. pH. The pH value of the water extract of the finished cloth shall be no less than 5.5 nor more than 8.5.

e. Shrinkage. The residual shrinkage of the finished cloth shall not exceed 2.0 percent in either the warp or filling direction by Method 5550 of FED-STD-191.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:35Z
Check the source to verify that this is the current version before use.

f. Seam efficiency. The seam efficiency of the finished cloth shall be not less than 80 percent.

g. Tear strength, color, durable press appearance, soil release, crease retention and spray rating shall not apply.

3.1.2 Class 2. The basic material of the class 2 cover shall be unbleached cotton sheeting conforming to type I, class 2, style B of CCC-C-430 except that a maximum of 3.0 percent shrinkage in either the warp or filling direction will be allowed. As an alternate basic material, bleached polyester and cotton blend conforming to type II, class 2, style F or type II, class 2, style G or type II class 2, style E of CCC-C-430 will be allowed.

3.1.3 Class 3. The basic material of the class 3 cover shall be bleached cotton sheeting conforming to type II, class 2, style A, or as an alternate, bleached polyester and cotton blend conforming to type II, class 2, style F or type II, class 2, style G of CCC-C-430, or as an added alternate, bleached cotton drill conforming to type II, class 3 of CCC-C-426 will be allowed. The basic material of the type III, sizes 1 and 5, class 3 covers shall be bleached cotton sheeting conforming to type II, class 2, style B; or as an alternate, bleached polyester and cotton blend conforming to type II, class 2, style F or type II, class 2, style G of CCC-C-430.

3.1.4 Tape.

3.1.4.1 Class 1, 2 and 3 covers. The tape for ties of classes 1 and 2 covers shall conform to type I, class 1 or 2, 5/8 inch wide of DDD-T-86. The tape for ties of class 3 covers shall conform to type I, class 2, 5/8 inch wide of DDD-T-86.

3.1.4.2 Tape for seam binding of type II covers. The tape for seam binding of type II covers shall conform to type I, 5/8 inch wide of DDD-T-86. The class of tape for seam binding shall be class 1 for unbleached material and class 2 for bleached material.

3.1.5 Thread.

3.1.5.1 Class 1 and 2 covers. The thread for sewing the classes 1 and 2 covers utilizing stitch type 301 and for bartacking shall be ticket No. 30, 3 ply, type IA1 for needle and bobbin, conforming to V-T-276, or for stitch type 401, ticket No. 30, 3 ply for needle, and ticket No. 50, 3 ply for looper, type IA1, conforming to V-T-276.

3.1.5.2 Class 3 covers. The thread for sewing class 3 covers utilizing stitch type 301 shall be ticket No. 30, 3 ply, type IA2 for needle and bobbin, conforming to V-T-276; or for stitch type 401, ticket No. 30, 3 ply for needle and ticket No. 50, 3 ply for looper, type IA2 conforming to V-T-276. Thread for bartacking shall be ticket No. 30, 3 ply type IA1 of V-T-276.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:35Z
Check the source to verify that this is the current version before use.

3.1.6 Snap fasteners. The snap fasteners for type I, sizes 8, 10, 11 and 12 covers shall be brass, style 3, finish 1 (bright brass), male and female, conforming to MIL-F-10884.

3.2 Stitches, seams and stitching. All stitches, seams and stitching except bartacking shall be performed using stitch type 301 or 401 of FED-STD-751 with 10 to 14 stitches per inch.

3.2.1 Automatic stitching. Any of the stitching operations may be performed with an automatic machine provided the requirements for stitch pattern, stitches per inch, size and type of thread are met; and at least three or more tying, overlapping or backstitches are used to secure the ends of stitching.

3.2.2 Type 301 stitching. Thread breaks and two or more consecutive skipped stitches or runoffs shall be overstitched not less than 1/2-inch back of break. Ends of stitching shall be backstitched or backtacked not less than 1/2-inch where ends are not caught in other seams and stitching.

3.2.3 Type 401 stitching. Thread breaks in stitching shall be overstitched in each direction not less than 1-inch at each break. The looper thread shall be on the inside of the cover. Breaks or skip stitching may be repaired with stitch type 301.

3.2.4 Bartacking. Bartacking shall be 1/2 ± 1/16-inch in length, and 1/8 ± 1/32-inch in width and shall contain 28 stitches. Bartacking shall be free of thread breaks and loose stitching.

3.2.5 Thread tensions. Thread tensions shall be maintained so that there will be no loose or excessively tight stitching resulting in puckering of the materials sewn. All thread ends shall be trimmed to 1/4-inch maximum length.

3.3 Identification marking. The markings shall be in the format and size of characters specified in 3.3.1 and 3.3.2, and shall conform to type III or IV, class 9 of DDD-L-20 and shall show fastness as specified for class 5 labels.

3.3.1 Military Medical Services. The outside center of the end flap shall be marked. The marking shall consist of a caduceus 2-1/4 inches ± 1/16-inch high, centered between the block letters "U" and "S" 11/16 ± 1/16-inch high, in accordance with type I of MS 16686. The contract or purchase order number shall be marked on the inside center of the bottom piece on the hem in block numbers and letters a minimum of 18 point.

3.3.2 For other than Military Medical Services. The contract or purchase order number shall be marked on the inside center of the bottom piece on the hem in block numbers and letters a minimum of 18 point. The letters "US" shall be centered in a minimum of 54 point block letters on the outside of the end flap.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:35Z
Check the source to verify that this is the current version before use.

3.4 Type I, boxed corners, slit opening. Type I covers shall be rectangular-shaped, with boxed corners and lapped side seams and shall have either snap fasteners (see 3.4.7) or tie tapes (see 3.4.6 and figure 1) as applicable for closing the overlap slit.

3.4.1 Size. The size of the covers shall be as specified in table I.

TABLE I. Dimensions of type I covers

Size	Length 1/ (A)	Width 2/ (B)	Height 3/ (D)
1	81	31	4-1/8
2	81	36	6-1/8
3	85	40	6-1/8
4	79	58	6-1/8
5	82	45	9-5/8
6	82	59	9-5/8
8	78	39	7-1/8
10	79	40	5-1/8
11	79	55	5-1/8
12	78	39	5-1/8
14	77	36	6-1/8

1/ Tolerance - minus 0, plus 1 inch.

2/ Tolerance - minus 0, plus 1/2 inch.

3/ Tolerance - minus 0, plus 1/4 inch.

3.4.2 Cutting. The length of the covers and side wall shall be cut in the direction of the warp. The fabric may be cut in one or two pieces for the cover length. If two pieces are used, the joining seam shall be seam type LSc-2 stitch type 301 or 401, 1/4 or 5/16-inch gage, and shall be in the center of the boxing at the closed end. For type I, sizes 2 through 6 and size 14, cut 6 tie tapes of a sufficient length to meet the finished requirements specified in 3.4.6.

3.4.3 Sides. The sides shall be joined at the center of the boxing with stitch type 301 or 401, seam type LSc-2, 1/4 or 5/16-inch gage. When selvages are used; the sides may be joined at the center of the boxing with seam type LSa-2, 1/4 or 5/16-inch gage.

3.4.4 Hemming. The ends of the cover shall be hemmed with stitching type EFb-1, stitch type 301, to form a hem not less than 2 inches wide. The row of stitches shall be 1/8 to 3/32 inch from turned edge of hem.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:35Z
Check the source to verify that this is the current version before use.

3.4.5 Corners. All four corners shall be seamed completely across using seam type SSc-2 or SSe-2 stitch type 301 or 401. A bartack shall be placed on both top side slit end openings where overlap seam joins on top side of mattress cover. Each side bartack shall be placed in a perpendicular direction to the top hem edge of the slip opening, 1/16 to 1/8-inch from hem edge and 1/8 to 3/16-inch in from side vertical box hem edge. Bartack is not to extend over the overlap seam and shall conform to 3.2.4. The finished corners shall measure not less than dimension D, as shown in table I for each of the given sizes.

3.4.6 Tie tapes. The type I, size 2 through 6 and size 14 covers shall have tie tapes for closing the overlap slit. One end of each of the tie tapes shall be hemmed with stitching type EFb-1, 1/8 to 3/32 inch with stitch type 301, or as an alternate, bartacked with a 1/2-inch bartack centered on the tape (see 3.2.4). The other end of the tapes shall be turned under 3/4 ± 1/8-inch and the tape bartacked to the center line (± 1/8-inch) of the hem 1/8 to 3/16-inch from the turned edge. The tapes shall be bartacked to the hem at the center line with two bartacks spaced 1/2 ± 1/16-inch, extending across the full width of the tape. One tape shall be fastened to the under side of the top overlap at the center and one tape midway (plus or minus 1/2-inch) between the center and each respective side edge. Three tapes shall be similarly located on the bottom flap, as shown on figure 1. Free end of the tie tapes are to measure not less than 10 inches.

3.4.7 Snap fasteners (Air Force only). The type I, sizes 8, 10, 11, and 12 covers shall use snap fasteners conforming to 3.1.6 to secure the end flaps. Snap fasteners shall be spaced equidistant along the end flap, four pairs on cover sizes 8, 10 and 12 and six pairs on size 11. The female half shall be installed on the outside of flap hem, the male half on the inside flap hem of the slit opening.

3.5 Type II, set-in box, flap opening. Type II covers shall be rectangular shaped with set-in box, taped binding seams and tie tapes for closing the flap opening as shown on figure 2.

3.5.1 Size. The size and dimensions of the finished covers shall be as shown in table II. The dimensions B and D shall be measured from seam to seam on the inside of the mattress cover.

TABLE II. Dimensions of type II covers

Size	Length (A 1/ Inches	Width (B 2/ Inches	Height (D and C) 3/ Inches
2	83	37-1/2	6-5/8
3	82	29-1/2	7-1/8
4	82	36-1/2	7-1/8
5	84	40-1/2	7-1/8
6	84	48-1/2	7-1/8

Source: https://assist.dla.mil -- Downloaded: 20261O-26T12:35Z
Check the source to verify that this is the current version before use.

TABLE II. Dimensions of type II covers (cont'd)

Size	Length (A) 1/ Inches	Width (B) 2/ Inches	Height (D and C) 3/ Inches
7	77	40	6-5/8
8	84	37-1/2	7-1/8
9	84	54-1/2	7-1/8
12	78	37	4-1/8
13	75	54	4-1/8
14	81	34	4-1/8
15	89	34	5-1/8
16	86	39	5-5/8
17	81	37	5-1/8

1/ Tolerance - minus 0, plus 1 inch.

2/ Tolerance - minus 0, plus 1/2 inch.

3/ Tolerance - minus 0, plus 1/4 inch.

3.5.2 Cutting. The length of the covers and box shall be cut in the direction of the warp. The fabric for the face and the back shall be cut in one piece. The set-in box shall be cut in three pieces, one for each side and one for the open or flap end. Cut 6 tie tapes of sufficient length to meet the finished requirements specified in 3.5.7.

3.5.3 Join top and bottom. The top and bottom shall be joined to the set-in box, using stitch type 301, seam type SSa-1, with the stitching not less than 3/32 inch nor more than 5/32 inch from the free edges.

3.5.4 Bindings. The seams, corners and entire open end shall be bound half and half with 5/8 inch tape (see 3.1.4.2) using seam type BSa-1. The stitching shall be not less than 1/16 inch from the edge of the binding.

3.5.5 Hemming. The ends of the cover and side boxing, and bottom and side of flap shall be hemmed with stitching type EFb-1, stitch type 301 to form a hem 1 inch ± 1/8 inch wide. The row of stitches shall be 1/8 to 3/32 inch from the turned edge of the hem.

3.5.6 Join flap to bottom of cover. The flap shall be joined to bottom of cover, using seam type SSa-1, stitch type 301 or 401.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

3.5.7 Tie tapes. The type II covers shall have tie tapes for closing the flap opening. One end of each of the tie tapes shall be hemmed with stitching type EFb-1 1/8 to 3/32 inch with stitch type 301; or as an alternate, bartacked with a 1/2-inch bartack centered on the tape (see 3.2.4). The other end of the tapes shall be turned under 3/4 ± 1/8 inch and the tape bartacked to the hem 1/8 to 3/16 inch from the turned edge. The tapes shall be bartacked to the cover with two bartacks spaced 1/2 ± 1/16 inch, extending across the full width of the tape. The tapes for the top of the cover shall be bartacked on the hem. The tapes for the flap shall be sewn with one bartack on the center of the binding edge seam, and the other bartack 1/2 inch away. One tape shall be placed in the center and one tape midway (± 1/2 inch) between the center and each respective side edge as shown in figure 2. Three tapes shall be similarly located on the outside of the flap. Free ends of the tie tapes shall measure not less than 8 inches.

3.6 Type III, envelope. The type III envelope mattress covers shall be rectangular shaped with tie tapes, as shown on figure 3.

3.6.1 Size. The size and dimensions of the finished covers shall be as specified in table III. The finished size of the flap shall be 6-inches (minus 0, plus 1-inch).

TABLE III. Dimensions of type III covers

Size	Length (A) 1/ Inches	Width (B) 2/ Inches
1	75	28
2	83	41-1/2
3	87-1/2	34
4	78	34
5	80	29-1/2
6	83	36
7	77-1/2	31
8	82-1/2	43-1/2
9	82-1/2	60-1/2
10	80-1/2	58-1/2

1/ Tolerance - minus 0, plus 1 inch.

2/ Tolerance - minus 0, plus 1/2 inch.

3.6.2 Cutting. Cutting may be in either the warp or filling direction. If the cover is one piece, it is not necessary to stitch the folded edge. The bottom of the cover shall extend beyond the top cover to form the flap or the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

flap may be made from a separate piece with a finished length of 6 inches (-0, plus 1 inch) from the seam, and shall be joined to the bottom of the cover with seam type LSc-2, stitch type 301 or 401. Cut 6 tie tapes of sufficient length to meet the finished requirement of 3.6.6.

3.6.3 Sides. Sides and bottom edges of the cover shall be joined using seam type SSa-1, stitch type 301 and 401 and inverted. The stitching margin shall be not less than 3/8 inch. Both sides of the flap shall be the same, either selvage edges or hemmed. When selvage edges are not used, both side edges shall be hemmed using stitching EFb-1, stitch type 301 or 401. Selvage edges shall be hemmed with stitching type EFa-1, stitch type 301 or 401 when the cover flap width is larger than the cover width by more than 2 inches on either side.

3.6.4 Hemming. The ends of the cover shall be hemmed with stitching type EFb-1, stitch type 301, to form a hem not less than 1 ± 1/8 inch wide. The row of stitches shall be 1/8 to 3/32 inch from the turned edge of the hem.

3.6.5 Ends of opening. The ends of openings shall be bartacked on the seam joining the top piece to the bottom piece.

3.6.6. Tie tapes. The type III, size 1 through 10 covers shall have tie tapes for closing the flap.

a. One end of each of the tie tapes shall be hemmed with stitching type EFb-1, stitch type 301, with the row of stitches 1/8 to 3/32 inch from the turned edge of the tape hem, or bartacked with a 1/2 inch bartack approximately centered on the tape (see 3.2.4).

b. The other end of the tapes shall be turned under 3/4 ± 1/8 inch and the turned edge of the tape shall be superimposed on the finished hem of the cover 1/8 to 3/16 inch from the turned edge of the hem, and bartacked through the hem of the cover 1/8 to 3/16 inch from the folded edge of the tape and then a second bartack shall be placed 3/8 ± 1/16 inch from the first bartack.

b-1. As an alternate, the end of the tapes shall be superimposed on the finished hem of the cover 1/8 to 3/16 inch from the folded edge of the hem and bartacked through the hem 1/2 ± 1/16 inch from the end of the tape. The tape shall be turned over the first bartack toward the folded edge of the hem and a second bartack shall be placed 1/4 to 3/8 inch from the turned edge of the tape.

c. Three tapes shall therefore be bartacked to the top and bottom of the cover (see figure 3). The tapes shall have been bartacked to the cover with two bartacks spaced 1/2 ± 1/16 inch, extending across the full width of the tape. The tapes on the top of the cover shall be placed on the hem with one at the approximate center and one on each side 9 inches from the center (± 1/2 inch). The tapes on the bottom

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

of the cover shall be directly opposite the tapes on the top of the cover with the folded end of the tapes in line where the flap begins to extend beyond the top cover. The tie tapes shall measure not less than 8 inches in length when measured from the bartack to the hemmed end.

3.7 Workmanship. The finished and assembled covers shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.2.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.2.2 End item examination. The end item shall be examined in accordance with 4.2.2.1 and 4.2.2.2. The lot size shall be expressed in units of one mattress cover. The sample unit shall be one mattress cover.

4.2.2.1 Visual examination. The end item shall be examined for the defects listed below. The inspection level shall be II and the acceptable quality level (AQL) shall be 1.5 major and 6.5 total (major and minor combined) defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:35Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Quality of materials	Hole, cut, tear or smash.	X	
	Floats or skips:		
	Multiple 1/2 inch or more in length.	X	
	Multiple, less than 1/2 inch in length.		X
	Slub, over 1/8 inch in thickness.		X
	Light or heavy bars.		X
	Spot or stain, on outside of cover, clearly visible.*		X
	*NOTE: Clearly visible at normal inspection distance (approximately 3 feet). Small spots caused by loomfly (waste or colored fiber that has been spun into a yarn, or woven into the cloth) shall not be scored as defects. (These spots are usually contained on a single yarn, and are not more than 1/2 inch in length.) Spots or stains which are light in color and less than 1/2 inch in any dimension shall not be scored as defects.		
Construction	Fabric of type I cover not one or two pieces for the cover length.		X
	Fabric for the face and back of type II cover not one piece.		X
	Set-in box of type II cover not in three pieces (one for each side and one for the open or flap end).		X
	Top of type III cover not one piece.		X
	Bottom of type III cover consists of more than two pieces.		X
Seams and stitching	Seams badly twisted, pleated or puckered.		X
	Any thread breaks, skipped stitches, or runoffs not overstitched as specified.		X
	Ends of stitching neither backstitched nor backtacked as specified.		X
	Less than two rows of stitching where two rows of stitching are required.	X	
	Stitching margin irregular affecting appearance.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Seams and stitching (cont'd)	Stitching on binding tape of type II cover less than 1/16 inch from edge of tape.		X
	Seams open more than 1 inch when type 301 stitch is used.	X	
	Seams open up to and including 1 inch when type 301 stitch is used.		X
	Any open seam where type 401 stitch is used.	X	
	NOTE: Puckering is evidence of open when one or more stitches joining a seam are broken, or when two or more continuous skipped stitches or runoffs occur. On double-stitched seams a seam shall be considered open when either one or both sides of the seam are open.		
	Loose tension resulting in a loose seam.	X	
	Tight tension (stitches break when normal tension is applied to seam or stitching).	X	
	Loose tension or raised stitching resulting in a loose thread definitely affecting appearance.		X
	NOTE. Puckering is evidence of tight tension. When puckering is evident, seam should be tested by exerting normal pull in lengthwise direction of seam.		
	Gage of seams not within range specified.		X
	Width of seam less than specified.		X
Seam and stitch type	Wrong seam or stitch type.		X
	Chain portion (looper thread) of stitching (type 401) exposed on outside of cover.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Stitches per inch	Two stitches less than specified.	X	
	One stitch less than specified.		X
	More than specified (except bartacks).		X
	NOTE: Variation in the number of stitches per inch, caused by the operator's speeding up the machine and pulling the fabric in order to sew over heavy seams or heavy places or in turning corners, shall be classified as follows: a. Within the Minor defect classification - No defect. b. Within the Major defect classification - Minor defect.		
Accuracy of seaming	Any part of mattress cover caught in unrelated stitching affecting serviceability.		X
	Joining seam on type I mattress cover not in center of boxing.		X
	Raw edge over 3/4 inch long on hem.		X
	Raw edge visible on outside of cover.		X
	NOTE: Raw edge not securely caught in stitching shall be classified as an open seam.		
Bartacks	Any required bartack omitted.	X	
	Any bartack in wrong location.		X
	Length or width of bartack not as specified.		X
	Incorrect number of stitches.	X	
	Stitching loose, incomplete, or broken.		X
Assembly of components	Any component missing.	X	
	Tape at corners of type II cover is not continuation of the side taping.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Assembly of components (cont'd)	Fabric of type II cover not fully inserted into binding.		X
	Binding of type II cover loosely applied.		X
	Flap of type II cover not joined to bottom of cover.		X
	Entire open end of type II cover, including seam joining flap to bottom cover, not bound as specified.		X
Cleanness	More than two untrimmed thread ends.		X
Hems	Omitted where required.	X	
	Raw edges of hem not turned under.		X
	Width of hem, not within tolerances.		X
	Not in location specified.		X
	Hem not finished on side specified.		X
Tie tapes (if applicable)	One or more tapes omitted.	X	
	Sewn end insecurely back-stitched.		X
	Corresponding tapes out of alignment by more than 1 inch.		X
	Tapes not spaced or not in location specified.		X
	Tape not attached to cover as specified.		X
	Raw edge not turned in where required.		X
	Free end of tie tape not hemmed.		X
	Not specified length.		X
Snap fasteners (if applicable)	Number less than specified.	X	
	Unevenly spaced by 1/2 inch or more.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Snap fasteners (if applicable) (cont'd)	Clinched excessively tight, cutting surrounding fabric.	X	
	Stud or socket missing, broken, bent, deformed, or otherwise defective not permitting proper function, unrelated.	X	
	Not in required place.		X
Identification marking (when required in contractual documents)	Omitted, incorrect, illegible, wrong location or wrong color.		X

4.2.2.2 Dimensional examination. The end item shall be examined for the defects listed below. The inspection level shall be S-3 and the AQL shall be 1.5 major and 4.0 total (major and minor combined) defects per hundred units.

Examine	Defect	Classification Major	Minor
All types and sizes:	Less than specified.	X	
Length, width or height	Greater than specified dimensions, including tolerances.		X

4.2.3 Packaging inspection. An examination shall be made to determine that the preservation, packing, and marking comply with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully packaged with the exception that it need not be closed. Defects of closure listed below shall be examined on shipping containers fully packaged. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:35Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Material	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling. Bulged or distorted container.
Content	Number of bundles per shipping container is more or less than required. Number of mattress covers per bundle is more or less than required. 1/ Size shown on one or more mattress covers not as specified on shipping container. 1/
Weight	Weight exceeds requirements of the container specification.

1/ For this defect, one bundle shall be examined from each shippping container in the sample.

5. PACKAGING

5.1 Preservation. Preservation shall be level A, B or Commercial, as specified (see 6.2).

5.1.1 Level A. Each cover shall be neatly folded to measure approximately 23 by 14-1/2 inches. Folded covers of one type, class and size only shall be evenly stacked in a bundle in the quantities specified in table IV. Each bundle shall be securely tied with cotton tape or twine.

TABLE IV. Packaging data

Type and class	Size	Quantity per bundle	Quantity per container
Type I, classes 1, 2, and 3	1, 2, 3, 4, 5, 6, 8, 10, 11, 12, and 14	5	65 pound weight limitation
Type II, classes 1, 2, and 3	2, 7, 8, 9, 12 13, 14, 15, 16 and 17	5	65 pound weight limitation

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:35Z
Check the source to verify that this is the currentversion before use.

TABLE IV. Packaging data (cont'd)

Type and class	Size	Quantity per bundle	Quantity per container
Type II, class 2	3	5	30 each
Type II, class 2	4	5	25 each
Type II, class 2	5	5	20 each
Type II, class 2	6	6	18 each
Type III, classes 1, 2, and 3	1, 2, 4, 5, 6, 7, 8, 9, and 10	5	65 pound weight limitation
Type III, class 2	3	6	36 each

5.1.2 Level B (civil agencies). Each cover shall be neatly folded. Ten folded covers of like description shall be evenly stacked in a bundle and wrapped in kraft paper or plastic film, and secured to prevent accidental opening.

5.1.3 Commercial. Covers shall be preserved in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be level A, B or Commercial, as specified (see 6.2).

5.2.1 Level A packing. Mattress covers of one type, class, and size only preserved as specified in 5.1, shall be packed in the quantities or weight limitation specified in table IV in a fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30 pound minimum basis weight kraft paper conforming to type I, grade B of UU-P-268. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636 except that the inspection shall be in accordance with 4.2.3

5.2.2 Level B packing. Mattress covers of one type, class, and size only, preserved as specified in 5.1, shall be packed in the quantities or weight limitations specified in table IV in a fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Inside dimensions

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:35Z
Check the source to verify that this is the currentversion before use.

of each shipping container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30 pound minimum basis weight kraft paper conforming to type I, grade B of UU-P-268. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.2.3.

5.2.2.1 Weather-resistant fiberboad containers. When specified (see 6.2) the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.2.3.

5.2.3 Commercial packing. Covers, preserved as specified in 5.1, shall be packed in accordance with MIL-STD-1188.

5.3 Marking.

5.3.1 Civil agencies. In addition to any special marking required by the contract, unit packs and shipping containers shall be marked in accordance with FED-STD-123 or MIL-STD-1188, as applicable.

5.3.2 Military requirements. In addition to any special marking required by the contract, shipping containers shall be marked in accordance with MIL-STD-129 or MIL-STD-1188, as applicable.

6. NOTES

6.1 Intended use. The mattress covers are intended for use in the following service application:

Type I:
- Size 1 - Marine Corps.
- Sizes 2, 3, 4, 5, 6 - Department of the Interior - Indian Service.
- Sizes 8, 10, 11, 12 - Air Force, Marine Corps.
- Size 14 - Civilian use (GSA).

Type II.
- Size 2 - Military Medical Services for hospital bed innerspring mattresses.
- Size 3 - Navy and Maritime Administration for built-in berths (29 inches).

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:35Z
Check the source to verify that this is the current version before use.

Type II: (cont'd)

Size 4 - Navy and Maritime Administration for built-in berths (36 inches).
Size 5 - Navy and Maritime Administration for Officers' single beds.
Size 6 - Navy and Maritime Administration for Officers' three-quarter beds.
Size 7 - Maritime Administration for Bachelor Officers' beds.
Size 8 - Maritime Administration for hospital and sick bay beds.
Size 9 - Maritime Administration for double beds.
Size 12, 13, 14 - Air Force.
Sizes 15, 16, 17 - Marine Corps.

Type III:

Size 1 - Maritime Administration for crew hammocks and berths.
Size 2 - Maritime Administration for Chief Petty Officers' berths and Navy enlisted men's bunks for shore establishments.
Size 3 - Navy Chief Petty Officers' and Maritime Administration enlisted men's berths.
Size 4 - Marine Corps.
Size 5 - Military Sea Transportation Service.
Size 6 - Army.
Size 7 - Navy.
Size 8 - Army, Navy, Air Force.
Size 9 - Air Force.
Size 10 - Air Force.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type, class, and size required (see 1.2).
(c) Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
(d) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
(e) When Military Medical Services marking is required (see 3.3.1).

6.3 Suggested user information. The following paragraph is only a suggested guide for users of this specification in selecting an appropriate size cover for their use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

6.3.1 Suggested guide. Type I and type II mattress covers should be 2 inches longer, 1 inch wider, and 1/2 inch thicker than the mattresses for which they are intended with a plus tolerance of 3/4 inch in all dimensions and no minus tolerance. The length of type III cover (exclusive of flap) should equal the length of mattress plus the thickness of mattress. The width of the cover should equal the width of the mattress plus the thickness of mattress plus 1 inch with a plus tolerance of 3/4 inch and no minus tolerance.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:35Z
Check the source to verify that this is the current version before use.

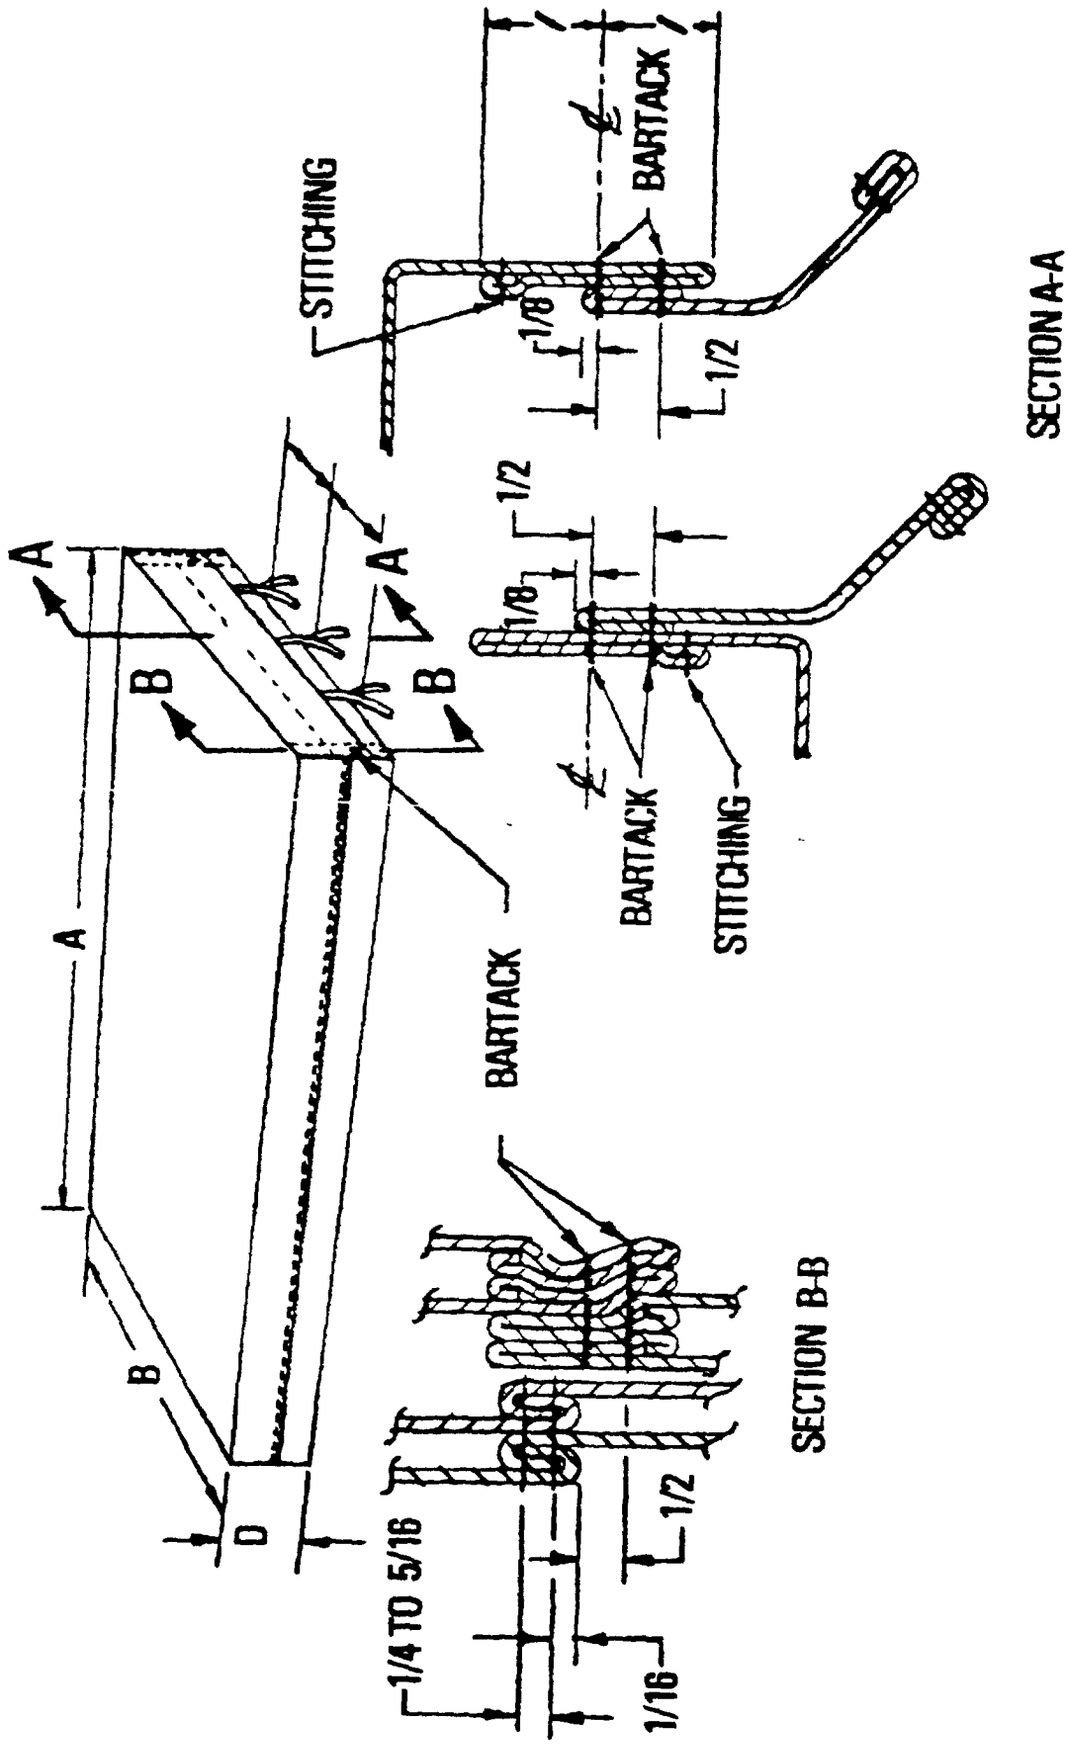


FIGURE 1. MATTRESS COVER, TYPE I

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

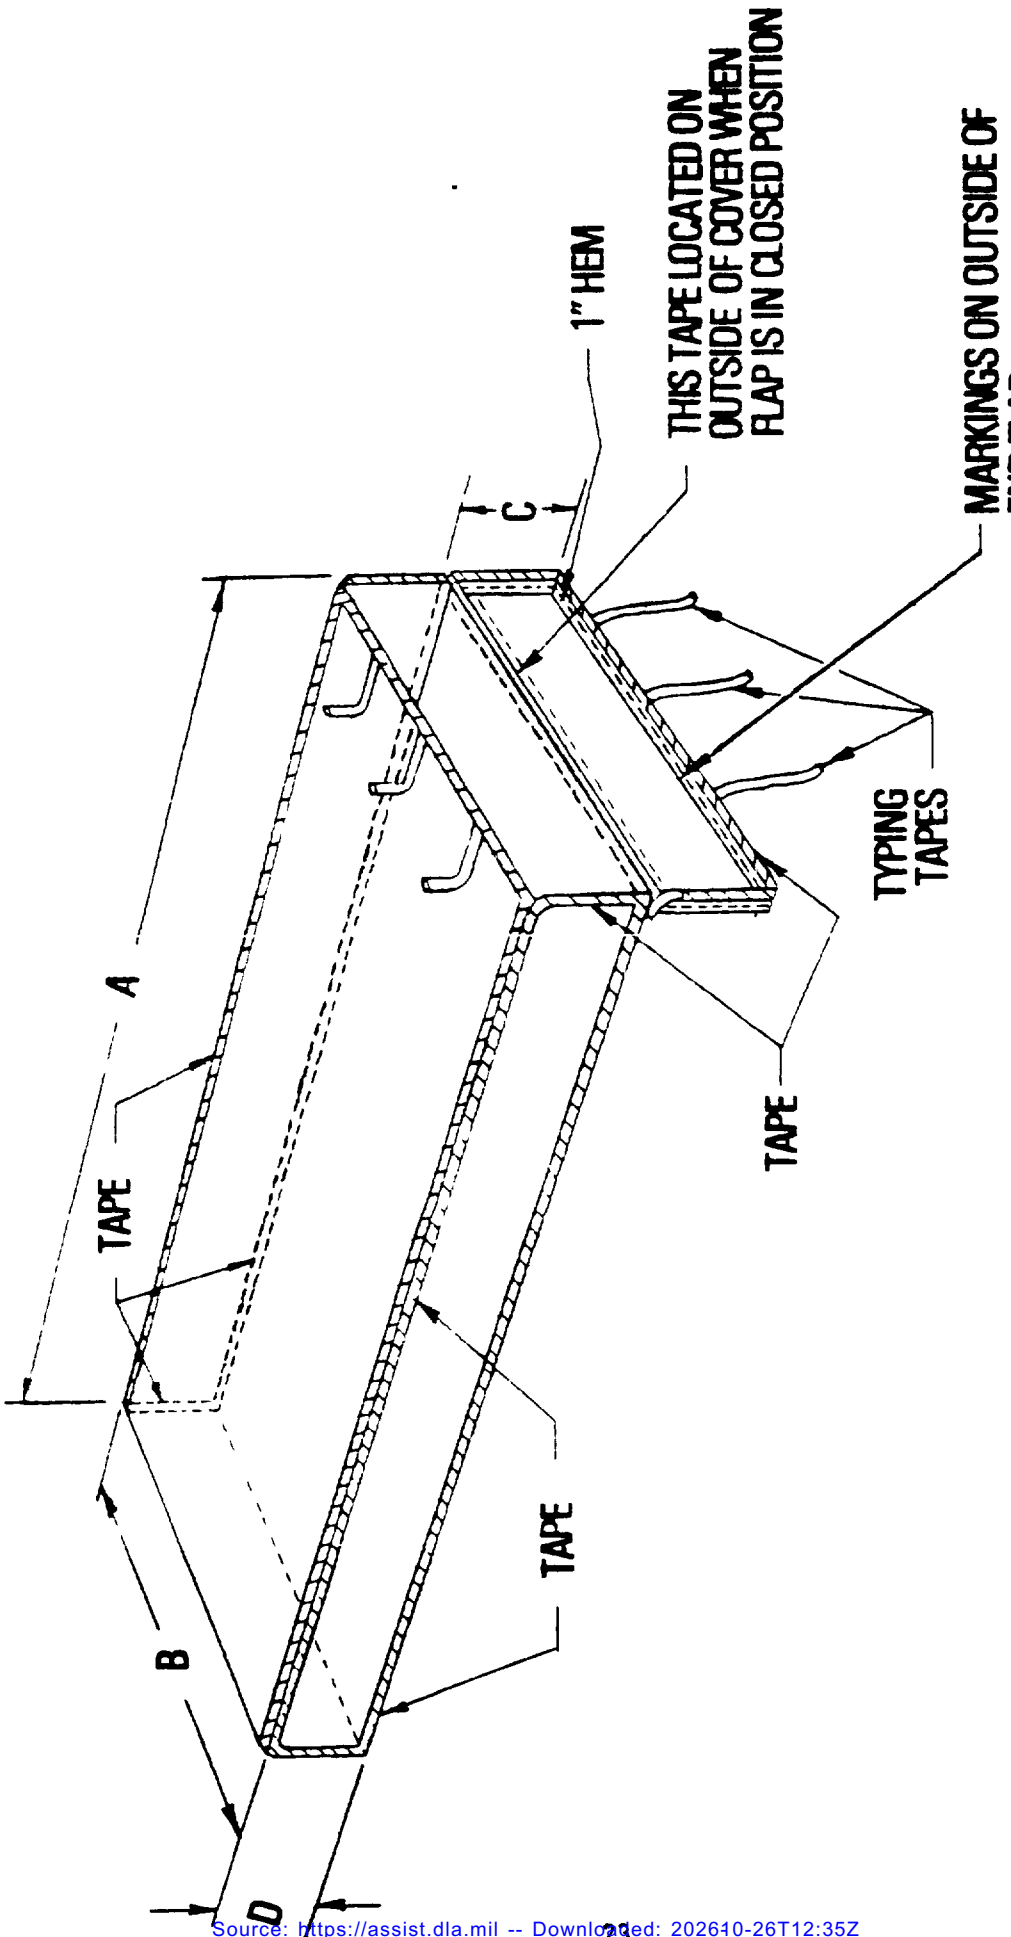


FIGURE 2. MATTRESS COVER, TYPE II

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

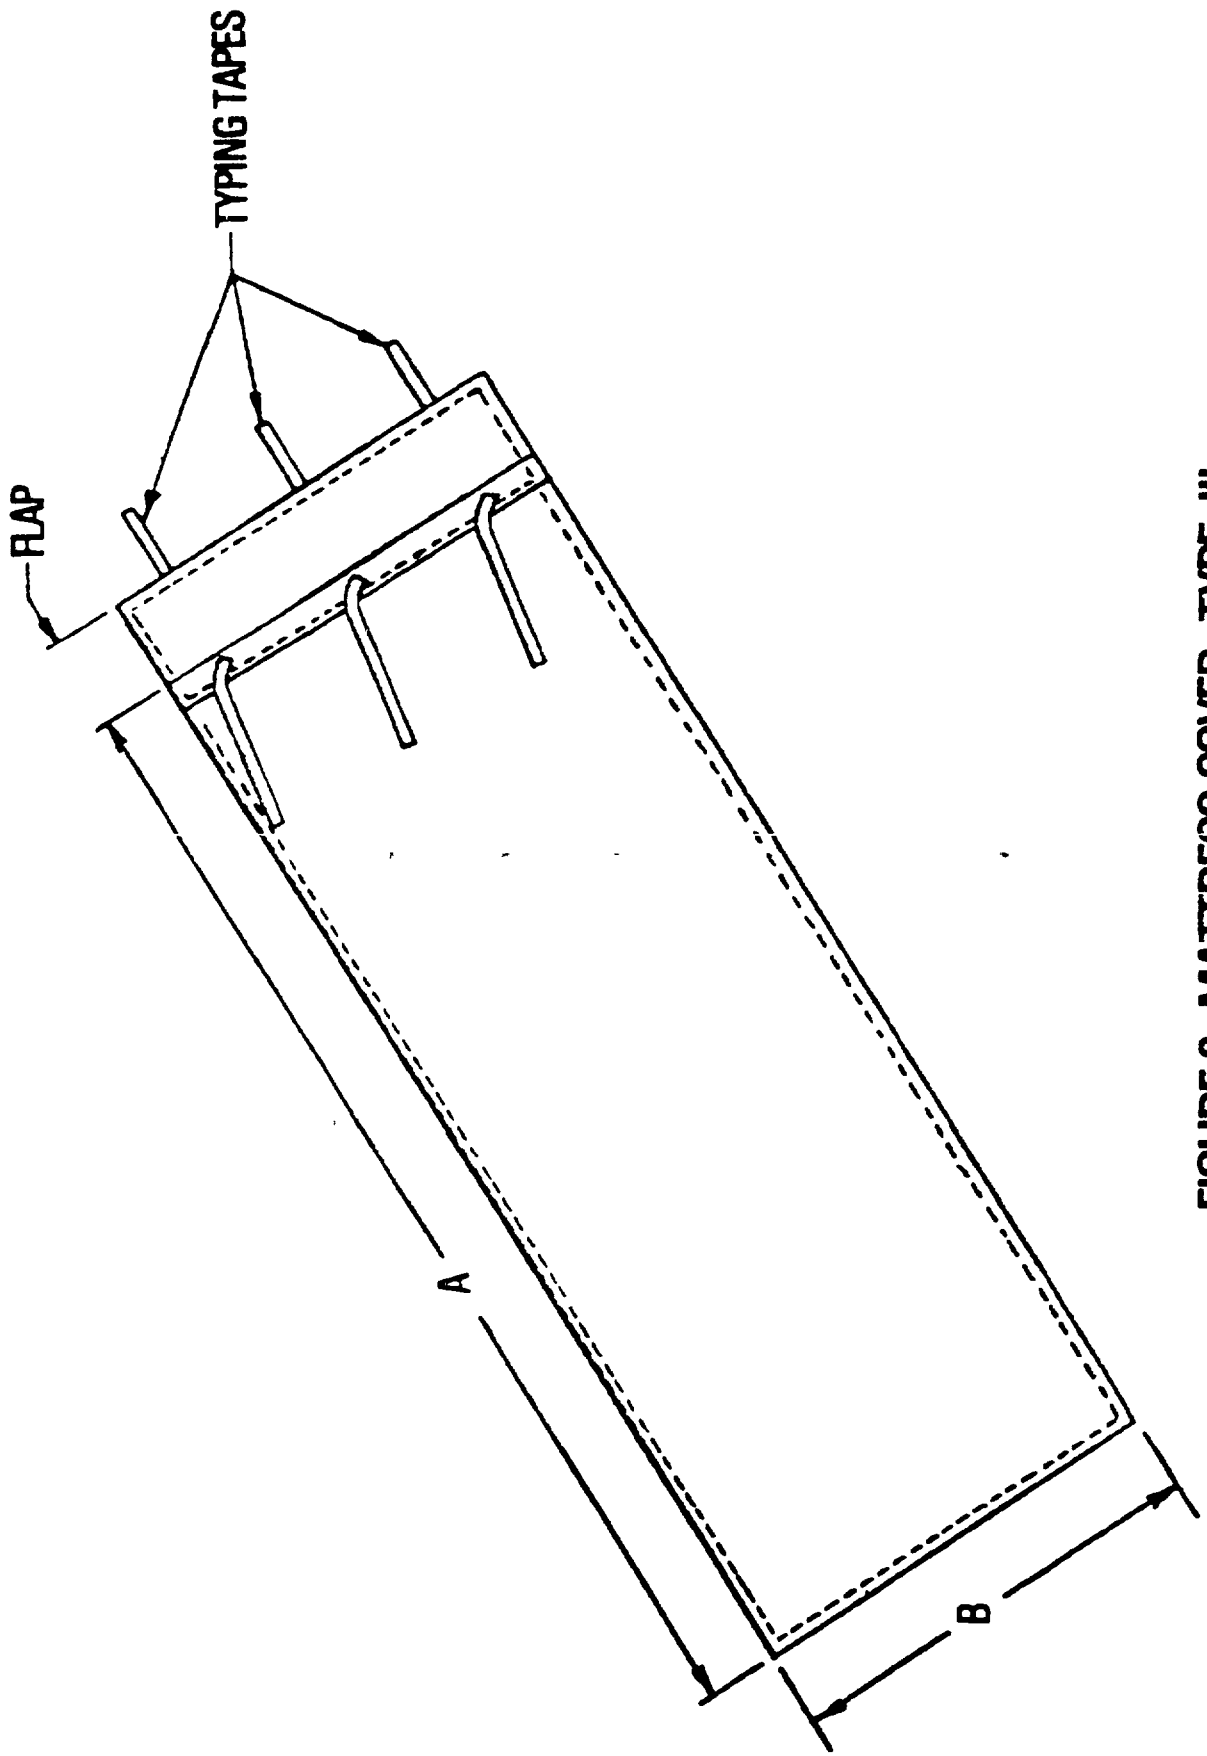


FIGURE 3. MATTRESS COVER, TYPE III

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians

Army - GL
Navy - NU
Air Force - 99

Review Activities

Army - MD
Navy - MS
DLA - CT, DM

User Activities

Navy - YD, MC, CG
Air Force - 45

CIVIL AGENCY COORDINATING ACTIVITY:

GSA-FSS

PREPARING ACTIVITY:

Army - GL

Project No. 7210-0251

Orders for this publication are to be placed with the General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:35Z
Check the source to verify that this is the current version before use.