DDD-C-800

SEPTEMBER 20, 1956

SUPERSEDING
Int. Fed. Spec. DDD–C–00800 (GSA–FSS)
January 13, 1955, and
GSA Spec. No. 685
August 8, 1944

FEDERAL SPECIFICATION

CURTAINS, BEDSIDE SCREEN

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 **Scope.**—This specification covers curtains for bedside screens.

1.2 **Classification.**

1.2.1 *Type and grades.*—Curtains shall be of one type and the following two grades, as specified:

Grade A.—Gothic cloth.

Grade B.—Muslin Cloth.

1.2.2 *Sizes.*—Curtains shall be of the following sizes and as specified (see 6.2):

Size 1.—30 inches wide by 58 inches long.

Size 2.—36 inches wide by 58 inches long.

Size 3.—45 inches wide by 61½ inches long.

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification:

Federal Specifications:

V–T–276—Thread; Cotton.

UU–T–111 — Tape, Paper, Gummed (Sealing and securing).

CCC–S–271—Sheeting; Cotton, Bleached, Wide.

CCC–T–191—Textile Test Methods.

DDD–S–751 — Stitches; Seams; and Stitching.

LLL–B–631—Boxes; Fiber, Corrugated (For Domestic Shipment).

Federal Standard:

Federal Standard No. 4—Glossary of Fabric Imperfections.

Military Specification:

JAN–P–108—Boxes, Fiberboard, Corrugated and Solid (Military Type).

Military Standards:

MIL–STD–105 — Sampling Procedures and Tables for Inspection by Attributes.

MIL–STD–129—Marking for Shipment and Storage.

(Activities outside the Federal Government may obtain copies of Federal Specifications and Standards as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are avail-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

able without charge at the General Services Administration Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, Seattle, and Washington, D. C.

(Federal Government activities may obtain copies of Federal Specifications and Standards and the Index of Federal Specifications and Standards from established distribution points in their agencies.

(Copies of Military specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Material.

3.1.1 *Muslin Sheeting.*—The sheeting shall be class A having a shrinkage of not more than 3 percent and otherwise complying with the requirements of Federal Specification CCC–S–271.

3.1.2 *Gothic cloth.*—Gothic cloth shall consist of approximately 54 percent cotton, 23 percent mohair, and 23 percent rayon. The cloth shall have the following properties:

Thread count — warp — 88 per inch (min.).
filling—40 per inch (min.).

Yarn count—warp—20/1 combed feeler cotton
filling—1/16 worsted.

Weight per Linear yard (82 inch width) —14.24 ounces.

Tensile strength—warp—90 pounds.
filling—58 pounds.

Shrinkage—2 percent maximum in both directions.

Properties of the cloth shall be tested as specified in 4.3.

3.1.3 *Thread.*—The thread shall be machine thread, soft finished, unbleached, 3 cord, ticket No. 30, conforming to Federal Specification V–T–276 for type IA1.

3.2 Construction.—Construction of curtains shall be as specified herein.

3.2.1 *Grade A, size 3.*—Grade A, size 3 curtains shall be constructed in conformance with figure 1.

3.2.2 *Grade B, sizes 1 and 2.*—Grade B, sizes 1 and 2 curtains shall be rectangular in shape. Each end of the curtain shall have a 3-inch hem with an additional row of stitching, ⅞ inch from the end of the curtain, forming an opening for the insertion of the curtain rod. Each side of the curtain shall have a ½-inch hem, except a hem is not required if the sheeting has a selvage edge.

3.2.3 *Stitching.*—All stitching shall be machine stitching conforming to Federal Specification DDD–S–751 for type 301. There shall be a minimum of 10 stitches to the inch. When machine stitching is not a continuous thread, it shall be backstitched not less than ½ inch at each break. All stitching shall be backstitched at the ends to prevent raveling, except where ends are turned under in a hem or held down by other stitching. Thread tension shall be properly maintained so that lock will be embedded in the center of the materials sewed. All edges which are not selvaged shall be hemmed with stitching type EFb–1. All seams shall be straight and evenly spaced. The openings for the rods shall be reinforced with bar tacks as shown in figure 1.

3.3 Workmanship.—Workmanship shall be first class throughout. Complete curtains shall be free from defects which detract from their appearance or which may impair their serviceability.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Sampling.

4.1.1 *Sampling for visual inspection.*—Sampling procedures shall be conducted in

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

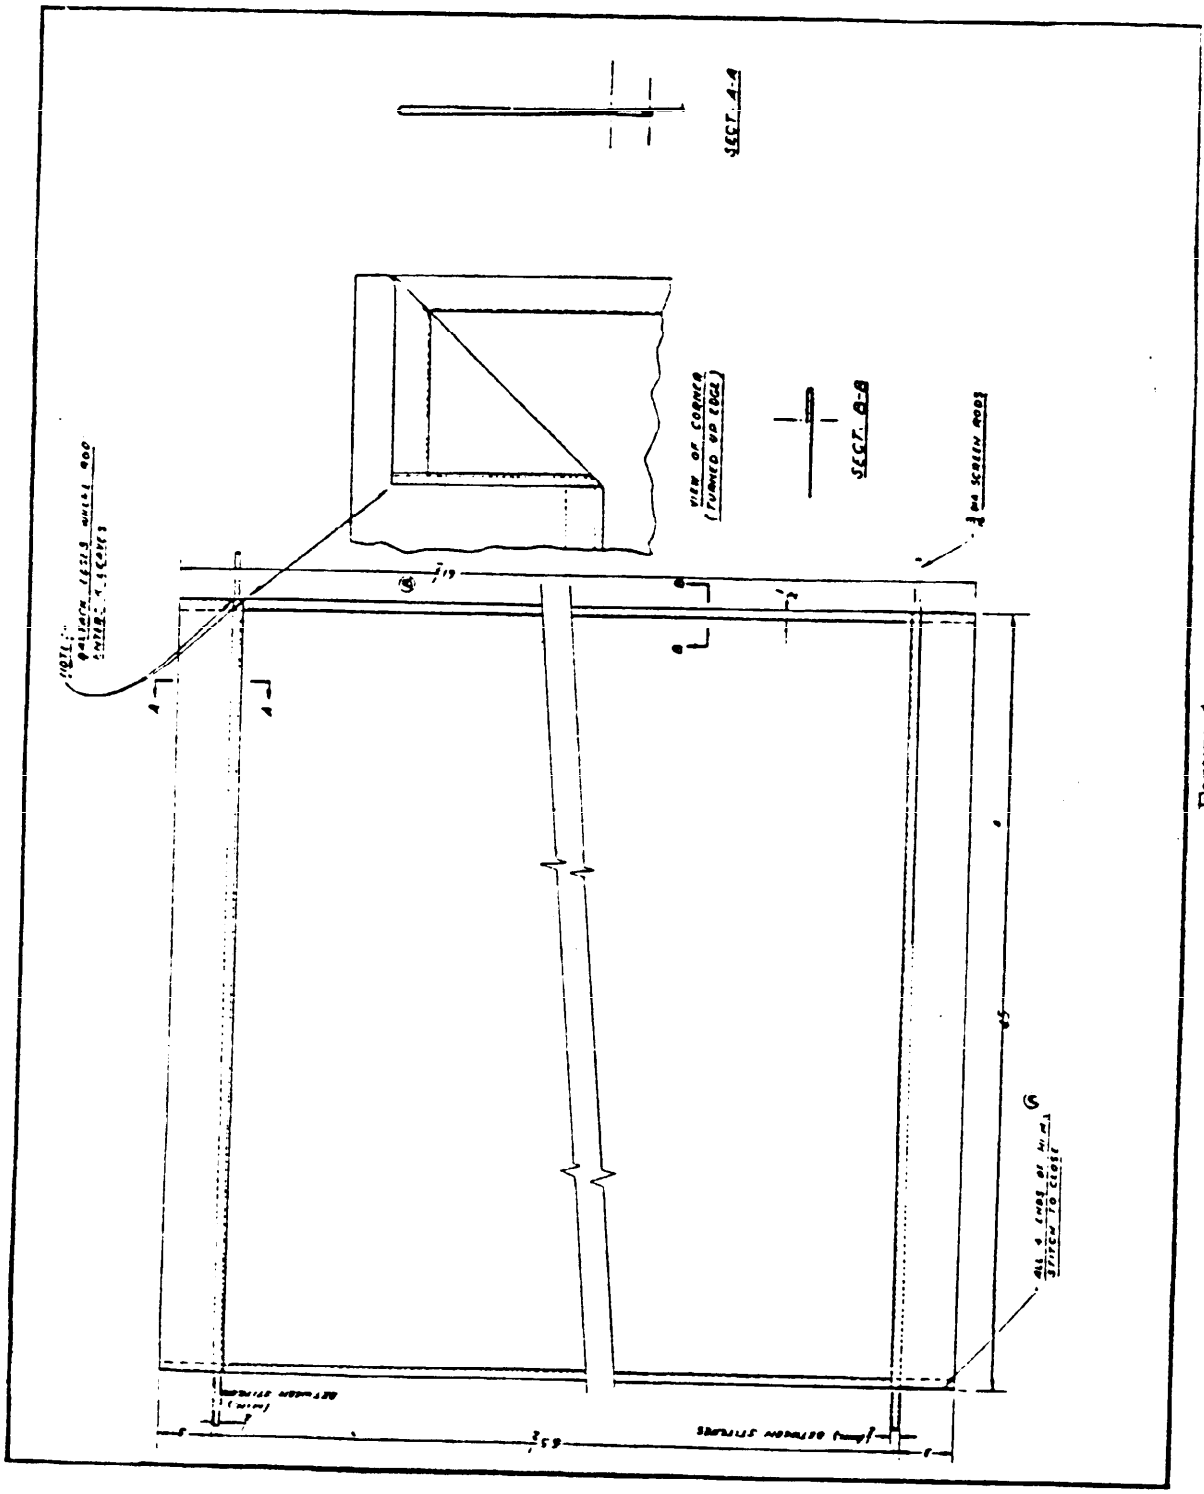


FIGURE 1.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:35Z
Check the source to verify that this is the current version before use.

accordance with the procedures set forth in Military Standard MIL–STD–105.

4.1.2 *Sampling for laboratory examination.*—Unless otherwise specified, samples shall be submitted in accordance with instructions furnished by the procuring activity.

4.2 Inspection.

4.2.1 *Inspection.*—Inspection may be made throughout the entire process of manufacture. The passing as satisfactory of any detail of construction or materials shall not relieve the contractor of responsibility for faulty workmanship or materials which may be discovered at any time prior to final acceptance. Final inspection of the finished article shall be made either at point of production or at point of delivery designated in the contract or purchase order of procuring agency. In case of factory inspection, every facility shall be afforded inspectors, by the manufacturer, for the prosecution of their work.

4.2.2 *Defects.*—Defects found during inspection shall be classified in accordance with defects specified in table I. The Government reserves the right to require inspection of any defects not included herein. (See Federal Standard No. 4).

4.3 Tests.—Tests shall be conducted in accordance with the following applicable methods described in Federal Specification CCC–T–191, to determine compliance with this specification.

Property	Test Method No.
Shrinkage—Gothic cloth	5552
—Muslin sheeting	5550
Thread count	5050
Yarn count	4020
Tensile strength	5100
Weight per linear yard	5041
Shrinkage	7552

TABLE I.—*Defects*

	Major	Minor
Fabric:		
(a) Any holes, cuts, tears, or any seriously weakening defects such as smashes, floats, loose slubs and needle chews which may develop into holes	X	
(b) Any mends, patches	X	
(c) Unsightly shade bars, affecting appearance	X	
Seams and stitching:		
(a) Wrong seam or stitch type	X	
(b) Open seam, run-off, raw edges more than ½ inch	X	
(c) Seams badly puckered or pleated		X
(d) Loose tension resulting in loose seam	X	
(e) Loose tension or raised stitching resulting in loosely exposed bobbin or top thread		X
(f) Stitches per inch less than number specified	X	
(g) Thread breaks overstitched or backstitched less than ½ inch		X
(h) Bartacks omitted	X	
(i) Bartack stitching loose or broken		X
Cleanness:		
(a) Any stains or dirt marks		X
(b) Thread ends or loose threads not trimmed		X
Overall dimensions:		
(a) Any measurement exceeding minus tolerance	X	
(b) Any measurement exceeding plus tolerance		X

5. PREPARATION FOR DELIVERY

(For definitions and levels, see 6.1.)

5.1 Packaging—(Military).

5.1.1 *Unit of issue.*—One (1) curtain, as specified, constitutes one unit.

5.1.2 *Quantities.*—Packaging and packing quantities shall be as specified in table II.

TABLE II.—*Packaging and packing quantities*

Unit pack	Intermediate pack	Shipping container
1 unit	6 units	48 units

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

5.1.2.1 *Packing variation permitted.*—If the required number of units to be shipped is less than the number of units specified to be overpacked in an exterior container, such units shall be packed in an exterior container of suitable size and design, acceptable to a common carrier, which will insure safe delivery to destination.

5.1.3 *Level A.*

5.1.3.1 *Unit packaging.*—Each unit shall be neatly folded to approximately 15½ by 15 inches and packaged in a bag fabricated from virgin polyethylene seamless tubing having an average wall thickness of 0.003 inch, with no wall thickness at any point below 0.00225 inch. Excess air shall be expelled or evacuated, and closure effected by heat sealing.

5.1.3.2 *Intermediate packaging.*—The number of units specified in table II shall be packaged in a weatherproof fiberboard box constructed in accordance with Military Specification JAN–P–108, compliance symbol W6c or W6s, except that the manufacturers' joint shall be effected by the application of water-resistant tape or by gluing integral lap to outer face of end or side panel, using water-resistant adhesive in lieu of metal stitches. Closure shall be effected by gluing of flaps or application of water-resistant gummed tape, 2 inches wide, applied over top and bottom center lengthwise seam extending 2 inches onto each end panel.

5.1.4 *Level C.*—Units shall be packaged in standard commercial containers of the size and kind commonly used for the purpose, which will afford the degree of protection required for shipment and use of the end product for its intended purpose within the continental limits of the United States of America.

5.2 **Packing—(Military).**

5.2.1 *Level A.*

5.2.1.1 *Exterior container.*—The number of units specified in table II shall be packed in a solid fiberboard box constructed, sealed, and strapped in conformance with Military Specification JAN–P–108, compliance symbol V3c or V3s. Box shall be of an overlap slotted style with inner flaps meeting in the center of the box and outer flaps overlapping as may, with no flap cutting required. Closure shall comply with appendix, except that strapping will not be required.

5.2.2 *Level C.*—The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest applicable rate, to point of delivery called for in the contract or purchase order.

5.3 Packaging — (Civilian domestic shipment).

5.3.1 *Level C.*—Units shall be neatly folded in the appropriate size. Twelve (12) are then tied in a package.

5.4 Packing — (Civilian domestic shipment).

5.4.1 *Level C.*—Ten (10) bundles (120 screen panels) shall be packed in a corrugated fiberboard box conforming to Federal Specification LLL–B–631. Corrugated material shall be "B" flute double faced corrugated fiberboard, testing not less than 350 lbs. per square inch. Body joints shall be stitched. All boxes shall be overlapped, slotted with the inner flaps overlapping. All flaps shall be sealed with a good adhesive applied throughout the entire area of flap contact.

5.4.1.1 *Liner.*—Each shipping container shall be provided with a one piece full length double faced "A" flute corrugated liner completely covering the end and side panels. The ends of the liner shall abut at the center of a side panel and shall be taped with a 60-lb. gummed Kraft tape, 3 inches wide, conform-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

ing to requirements of Federal Specification UU–T–111. Bursting strength of the corrugated liner shall be not less than 275 lbs. and the corrugation shall be vertical.

5.5 **Marking.**—Each unit package, each intermediate carton, and each shipping container shall be marked in accordance with Military Standard MIL–STD–129. Service color marking and symbol are not required on containers for level A packs, for the Medical Services of the Armed Forces.

6. NOTES

6.1 Federal Standard 102 should be referred to for definitions and applications of the various levels of packaging protection for supplies and equipment.

6.2 Purchasers should exercise any desired options offered herein and should specify the grade and size desired. If a size other than those listed in 1.2.2 is desired, the dimensions should be specified in the invitation for bids. (See 1.2.1, 1.2.2, 4.1.2, and 6.3.)

6.3 Purchasers should note that a shrinkage of 3 percent is permitted, which should be provided for when specifying sizes or dimensions.

6.4 It is believed that this specification adequately describes the characteristics necessary to secure the desired material, and that normally no samples will be necessary prior to award to determine compliance with this specification. If, for any particular purpose samples are desired, they should be specifically asked for in the invitation for bids, and the particular purpose to be served by the bid sample should be definitely stated, the specification to apply in all other respects.

6.5 This specification covers the following item appearing in the Armed Services Medical Stock List:

6530–707–7978—Curtain, Bedside Screen

6.6 **Transportation description.** — Transportation description applicable to this item is:

Dry goods, not otherwise indexed by name.

Carload minimum weight 20,000 pounds, subject to Rule 34, Uniform Freight Classification.

Truckload minimum weight, Any quantity.

Patent notice.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

MILITARY INTERESTS:

Army—M
Navy—Md
Air Force—AF.

★ U. S. GOVERNMENT PRINTING OFFICE: 1956

Copies of this specincation may be purchased for 10 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T12:35Z
Check the source to verify that this is the currentversion before use.