DDD-D-00646C(GSA-FSS)
March 30, 1972
INTERIM REVISION OF
Fed. Spec. DDD-D-646b
November 18, 1959

INTERIM FEDERAL SPECIFICATION

DRAWERS, MEN'S, THIGH LENGTH

This Interim Federal Specification was developed by the General Services Administration, Federal Supply Service, Washington, DC 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

The General Services Administration has authorized the use of this Interim Federal Specification as a valid exception to Federal Specification DDD-D-646b, dated November 18, 1959.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the requirements for men's thigh length drawers with elastic webbing inserts, fabricated of all cotton and polyester-cotton blended cloth.

1.2 Classification.

1.2.1 Types, classes, and sizes. The drawers covered by this specification shall be of two types, two classes, and the following sizes; as specified:

Type I - All cotton.
Type II - Polyester-cotton blend.
Class 1 - White.
Class 2 - Olive green 107.

Schedule of sizes

X-Small	(26-28)	Large	(38-40)
Small	(30-32)	X-Large	(42-44)
Medium	(34-36)	XX-Large	(46-48)
		XXX-Large	(50-52)

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

V-T-276 - Thread, Cotton.
V-T-285 - Thread, Polyester.
JJ-W-155 - Webbing, Textile, (Cotton, Elastic).
UU-P-268 - Paper, Kraft, Untreated, Wrapping.
PPP-B-636 - Boxes, Shipping, Fiberboard.
PPP-T-0060 - Tape: Pressure-Sensitive Adhesive: Waterproof, For Packing.
CCC-C-437 - Cloth, Broadcloth, Cotton Mercerized.
CCC-C-446 - Cloth, Muslin, Cotton.

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment.
Fed. Std. No. 191 - Textile Test Methods.
Fed. Std. No. 751 - Stitches; Seams; and Stitching.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Office in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:

MIL-F-10884 - Fasteners, Snap.
MIL-C-43479 - Cloth, Broadcloth, Polyester and Cotton.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Insepction by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Laws and Regulations:

Federal Trade Commissioner Publication:

Rules and Regulations Under the Textile Fiber Products Identification Act (16 AFR 303).

(Copies may be obtained without charge from the Federal Trade Commission, Washington, DC 20580.)

2.2 Other publications. The following publications of the issues in effect on date of invitation for bids form a part of this specification:

National Motor Freight Traffic Association, Incorporated, Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Association, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

United States Army Standard Color Card for Sewing Threads.

(Copies may be obtained from the Color Association of the United States, Inc., 200 Madison Avenue, New York, NY 10016.)

3. REQUIREMENTS

3.1 Guide sample. Samples are furnished to the contractor as a guide and information (see 6.3). Variations from the specification may appear in the sample, in which case the specification shall govern.

3.2 Preproduction sample approval. Unless otherwise specified, before production is commenced, the contractor shall submit one pair of the finished drawers to the contracting officer for approval (see 6.2 and 4.1.1).

3.3 Materials.

3.3.1 Basic cloth.

3.3.1.1 Cotton. The basic cloth for type I drawers shall be blended muslin, type III, class 3 of CCC-C-446 or broadcloth, type III, class 1 (bleached) or class 3 (dyed) of CCC-C-437. The dyed color shall be olive green 107 (DPSC Handbook 4120).

3.3.1.2 Polyester-cotton. The basic cloth for type II drawers shall be broadcloth, type I, class 1 (white) or class 2 (dyed) of MIL-C-43479. The dyed color shall be olive green 107 (DPSC Handbook 4120.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

3.3.2 Thread. The thread for seaming and stitching the drawers shall be thread, cotton, soft finish, type IA2 or type IA3, ticket No. 50, 3 ply and ticket No. 70, 2 ply, conforming to the requirements of V-T-276, or thread, polyester conforming to type I, class 1, subclass A, size B (2 or 3 ply) and size AA (2 ply) of V-T-285.

3.3.2.1 Color. The thread for class 1 drawers shall be bleached white and for class 2 drawers shall be dyed to match shade Olive drab S-1, cable number 66022 of the United States Army Standard Color Card for Sewing Threads.

3.3.2.2 Colorfastness. The colored thread shall show colorfastness to combined bleaching and laundering equal to or better than the standard shade sample when tested as required in V-T-276 or V-T-285, as applicable. When polyester sewing thread is employed, the colorfastness to combined bleaching and laundering shall be "fair" when tested in accordance with 4.3.1.

3.3.3 Labels. Each of the drawers shall be marked with an identification and size label conforming to type III or IV, class 4 of DDD-L-20. The colorfastness requirements to laundering shall apply.

3.3.4 Elastic inserts. The elastic webbing inserts shall be 1-1/4 inches wide and 6 ± 1/4 inches long for fabricating into each side of the drawers. The webbing inserts shall be white for class 1 drawers and olive green 107 for class 2 drawers, and shall conform to type I, class 9 webbing of JJ-W-155 with the following exceptions:

The weave shall be composed of one ground warp, one elastic warp and one filling. The ground warp shall weave one up and one down. The elastic warp shall weave one up and one down over all back picks and under all face picks. The weight per linear yard shall be a minimum of 0.50 ounce. The ground warp (full width) shall have a minimum of 35 yarns. The webbing shall contain 12 elastic strands of 42 gage (maximum fineness). The yarn size for the warp shall be 16/2 ply (± 2 counts). There shall be 40 picks per inch (minimum) with one pick per shed of 16/2 ply (± 2 counts), or 80 picks per inch (minimum) with 2 picks per shed of 16/1 singles (± 2 counts) in the filling. The initial tension shall be not less than 1.15 pounds nor more than 1.45 pounds using a carriage load of 15 pounds at 50 percent elongation. The low temperature elongation requirement shall not apply.

3.3.5 Snap fasteners. The snap fasteners shall be of a laundryproof type, 16 or 17 lines, consisting of four parts: cap, socket, stud and post, conforming to style 3 of MIL-F-10884. The stud diameter at the operation portion of the stud shall be not less than 0.150 inch. The fasteners for class 1 drawers shall be brass conforming to class 3 of MIL-F-10884, except the nickel finish shall have a minimum thickness of 0.00002 inches. The fasteners for class 2 drawers shall be brass finished with olive-green enamel matching the color of the cloth for class 2 drawers.

3.4 Design. The cotton drawers shall be of the thigh-length type with elasitc webbing inserts at sides of waistband, center-back panel, with three snap fasteners for front closure.

3.5 Patterns. When standard patterns are furnished by the Government, patterns shall not be altered in any way and are to be used only as a guide for cutting the contractor's working patterns. The working patterns shall be identical to the standard patterns.

3.5.1 List of pattern parts. The component parts of the pattern shall be cut from cloth as specified in accordance with the number of cut parts required for the manufacturing process as follows:

Material	Item	Nomenclature of pattern parts	Cut parts
Cloth, Cotton	1	Front parts	2
Broadcloth or	2	Center-back panel	1
Muslin, and	3	Waistband	2
Polyester-Cotton	4	Fly binding	1
Broadcloth. White	5	Alternate fly binding	2
or Olive Green 107.			

3.6 Construction.

3.6.1 Stitches, seams and stitching. Stitch, seam, and stitching types as specified in table I shall conform to Fed. Std. No. 751. When two or more methods of seam or stitch types are given for the same operation any one may be used. Where stitch-type 401 is used, the looper, that is the underthread, shall be on the inside of the drawers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

3.6.2 Stitches per inch. The number of stitches per inch as specified in table I shall be interpreted to mean the minimum and maximum number permitted.

3.6.3 Tacking and backstitching. Thread breaks and ends of all seams and stitches when not caught in other seams or stitching shall be securely tacked or backstitched not less than 1/2 inch.

TABLE I

No.	Manufacturing operations requirements	Stitch type	Seam and stitching type	Stitches per inch	*Thread	
					Needle	Bobbin or looper
1.	Cut drawers.					
	a. The drawers shall be cut in strict accordance with Government-furnished patterns which show directional lines for cutting and notches for the proper assembly of all parts.					
	b. All component parts shall be cut from one piece of cloth except the binding may be cut from ends or rolls made from the basic cloth.					
2.	Replacement of damaged parts.					
	a. Any part containing damages such as holes or seriously weakening defects such as smashes, multiple floats and slubs likely to develop into a hole shall be replaced at time of cutting.					
	b. Any part damaged during the manufacturing process by needle chews which may be expected to develop into a hole, scissors or knife cuts, tears, holes, mends, burns, and large exposed drill holes shall be replaced.					
3.	Shade marking.					
	a. For class 2 (dyed) drawers only. All parts shall be marked or ticketed to insure a uniform shade and proper assembly throughout the garment.					
	b. Metal fastening devices and sew-on tickets for use in shade marking are prohibited.					
	c. When adhesive-type shade tickets are used for shade marking they shall conform to the requirements of 3.7.					
	d. Use of an ink-pad numbering machine, rubber stamp or pencil is acceptable provided numbers do not show through the outside of garment or are not exposed in the finished seam.					
4.	Join fronts to back.					
	Finished appearance. The seams shall start and finish evenly. The seams shall be uniformly stitched, without twists or puckers. The outer row of double stitching shall be not more than 1/16 inch from the folded edge.					
	Join fronts to back with double-lapped and double-stitched seams 3/16 to 1/4 inch gauge.	301 or 401	LSc-2 LSc-2	12-14 12-14	50/3 50/3	50/3 70/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

TABLE I. (con.)

No.	Manufacturing operations requirements	Stitch type	Seam and stitching type	Stitches per inch	*Thread	
					Needle	Bobbin or looper
5.	Join fronts at crotch. Finished appearance. The seam shall start and finish evenly, shall be uniformly stitched, and shall be devoid of twists or puckers. The outer row of double stitching on the outside of the drawers shall be not more than 1/16 inch from the folded edge.					
	Join the fronts together at the crotch from the notch mark to the inseam edge with a double-lapped seam with left front over right front, and with two rows of single-needle stitching 3/16 to 1/4 inch gage converging to a point at the base of the fly opening.	301 or 401	LSc-2 LSc-2 (Shows finished seam)	12-14 12-14	50/3 50/3	50/3 70/2
6.	Make waistband. a. The waistband shall be made with two pieces of the basic cloth.					
	b. Join the two pieces together at the center back 1/2 ± 1/8 inch from the raw edges and open seam.	301	SSa-1	12-14	50/3	50/3
	c. Insert elastic web at each side of drawers, centered with outside of each leg. Each end of web shall be securely bartacked to the inside of waistband and the fullness of the waistband shall be distributed evenly over each web insert and stitched through the center of the web from left to right with not more than two rows of stitching.	301 or 401	SSt-2 SSt-2	8-10 8-10	50/3 50/3	50/3 70/2
7.	Join waistband to drawers. Finished appearance. The waistband shall be stitched to the drawers evenly without twist, puckers, or pleats.					
	The outer row of double stitching shall be not more than 1/16 inch from the folded edge.					
	a. Fold waistband in half lengthwise and stitch the raw edges to top of drawers with a double-lapped and double-stitched seam 3/16 to 1/4 inch gage with the waistband on top and the end of the waistband even with the ends of the drawers.	301 or 401	LSc-2 LSc-2	12-14 12-14	50/3 50/3	50/3 70/2
	b. The finished waistband shall measure 1-3/4 ± 1/8 inches wide at the center back and 4-1/4 ± 1/4 inches wide at each front edge.					
8.	Attach binding to left and right fronts. Finished appearance. The binding for finishing right and left fly shall be uniformly stitched to the drawers devoid of twists, puckers and pleats.					
	a. Fold binding strip in half lengthwise, turn in the side edges 1/4 ± 1/16 inch with the front edge of drawers inserted between the folds.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

TABLE I. (con.)

No.	Manufacturing operations requirements	Stitch type	Seam and stitching type	Stitches per inch	*Thread	
					Needle	Bobbin or looper
	b. Stitch 1/16 inch from the turned-under edge of the binding.	301 or 401	LSe-1 LSe-1	12-14 12-14	50/3 50/3	50/3 70/2
	c. The binding shall extend 1 ± 1/8 inch above the top of waistband on the left front, and 5 ± 1/8 inches above the top of waistband on the right front.					
	d. Turn back extension of binding at top of right waistband, turn the raw edges under and stitch 1/16 inch from edge on each of the four sides. The binding shall finish even (± 1/8 inch) with bottom edge of the waistband seam.	301		12-14	50/3	50/3
	e. Turn back binding to inside of left front with the extended edge turned under and stitched 1/16 inch from the edge with the stitching continued along the inside edge of binding and horizontally across base of front opening to the outer edge, catching the drawers in the stitching.	301	SSb-1 and SSa-1	12-14	50/3	50/3
	f. The binding may consist of two pieces of the basic cloth seamed to the front edge of drawers with a double needle machine 1-1/8 gage.	301 or 401	LSg-2 LSg-2	12-14 12-14	50/3 50/3	50/3 70/2
	g. The binding shall finish 1-1/8 ± 1/8 inches wide.					
9.	Bartacks. Make a 1/2 ± 1/16 inch horizontal bartack at the bottom of the fly opening 1/8 inch from the bottom folded edge of binding securely catching both folds of the binding through the drawers.	bartack		28 per bartack	50/3	50/3
10.	Make inseam. Finished appearance. The inseam joining front to back shall start and finish evenly. The width of the seams shall be uniform without twist, pleats or puckers. The outer row of double stitching shall be not more than 1/16 inch from the folded edge.					
	a. Join fronts to back at the inseam with a double-lapped and double-stitched seam 3/16 to 1/4 inch gage.	301 or 401	LSc-2 LSc-2	12-14 12-14	50/3 50/3	50/3 70/2
11.	Hem leg bottom. Finish appearance. The leg bottom shall finish uniformly without twist, puckers or pleats.					
	a. The leg bottom shall be turned up with the raw edge turned in 3/16 to 1/4 inch and stitched 1/16 inch from the turned-under edge.	301	EFb-1	12 14	50/3	50/3
	b. The hem shall finish 1/4 to 3/8 inch wide.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

TABLE I. (con.)

No.	Manufacturing operations requirements	Stitch type	Seam and stitching type	Stitches per inch	*Thread	
					Needle	Bobbin or looper
12.	Snap fasteners. Finished appearance. The snap fasteners shall be correctly positioned and securely attached to the cloth. The studs and sockets shall correspond in position. a. One stud shall be positioned 1/2 inch from the top edge with the remaining two studs spaced 1-1/2 inches apart. b. Three sockets shall be fastened on the left waistband to correspond with the studs.					
13.	Affix identification and size label. Position identification and size label at the inside center back of waistband. The marking shall not show on outside of waistband.					
14.	Clean drawers. All ends of stitching shall be trimmed and loose threads removed from the drawers. Remove all spots and stains. Remove all shade tickets. Fasten waistband.					

3.7 Adhesive shade tickets. Adhesive tickets, when used for shade marking, shall be of paper with a thermo-activated adhesive applied on one side that will withstand moderate steam pressing operations. The adhesive shall not discolor the cloth and the adhesive mass shall not adhere to the cloth upon removal of the tickets.

3.8 Manufacturing operations requirements. The drawers shall be manufactured by and with the use of all operations specified in table I. All stitching wherever possible shall be on the face of the cloth. The contractor is not required to follow the exact sequence of operations.

3.9 Measurements. The finished measurements for each size shall be as shown in table II. All measurements are in inches.

3.10 Workmanship. The finished drawers shall conform to the quality of product established by this specification. Occurence of defects shall be limited by the acceptable quality levels (AQL's) established herein.

TABLE II. Sizes and measurements

Size	Waist A*	Seat B*	Total length C*	Front rise D*	Back rise E* and F*	Fly opening I*	In-seam G*	Leg bottom H*
	Inches	Inches	Inches	Inches	Inches	Inches	Inches	Inches
26	13	20	16-1/4	13	20	9-3/4	5-1/2	11-1/2
28	14	21	16-1/2	13-1/4	20-1/4	10	5-1/2	12
30	15	22	16 3/4	13-1/2	20-1/2	10-1/4	5-1/2	12-1/2
32	16	23	17	13-3/4	20-3/4	10-1/2	5-1/2	13
34	17	24	17-1/4	14	21	10-3/4	5-1/2	13-1/2
36	18	25	17-1/2	14-1/4	21-1/4	11	5-1/2	14
38	19	26	17-3/4	14-1/2	21-1/2	11-1/4	5-1/2	14-1/2
40	20	27	18	14-3/4	21-3/4	11-1/2	5-1/2	15
42	21	28	18-1/4	15	22	11-3/4	5-1/2	15-1/2
44	22	29	18-1/2	15-1/4	22-1/4	12	5-1/2	16
46	23	30	18-3/4	15-1/2	22-1/2	12-1/4	5-1/2	16-1/2
48	24	31	19	15-3/4	22-3/4	12-1/2	5-1/2	17
50	25	32	19-1/4	16	23	12-3/4	5-1/2	17-1/8
52	26	33	19-1/2	16-1/4	23-1/4	13	5-1/2	18
Tolerance	± 1/4	± 1/2	+ 3/4-1/2	+1-1/2	± 1/2	± 1/2	± 1/4	± 1/2-1/4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

*Letters refer to location for measurements shown in figure 1.

Methods of measuring. The garment to be measured shall be buttoned and laid out without tension (except as otherwise noted) on a smooth, flat surface so that creases and wrinkles will not affect the measurements. Measurements shall be taken to the nearest 1/8 inch.

Waist. One-half of waist measured between outside edges of waistband (A - figure 1).

Width across seat. Measured across front of garment at a point 2-1/2 inches above bottom of crotch including width of crotch seam (B - figure 1).

Total length. Measured from top edge of waistband to lower edge of leg along folded edge at side (C - figure 1).

Front rise. Measured from bottom of crotch, including width of seam, up front of garment to middle front edge of waistband (D figure 1).

Back rise. Measured from bottom of crotch, not including width of seam, up length and along center of back of garment to top edge of waistband at center (E plus F - figure 1).

Fly opening. Measured from bottom of opening to top edge of waistband (I - figure 1).

Width across inseam. Measured from inside corner of one leg to other leg. Legs spread and inseam stretched taut in straight line (G - figure 1).

Leg bottom. Measured across leg along lower edge (H figure 1).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Preproduction sample approval. When required, preproduction samples (finished drawers) shall be submitted to the Government for inspection (see 3.2). The drawers shall be inspected by the Government for compliance in design, construction and workmanship required by this specification. The markings shall be inspected by the Government for compliance with the marking requirements specified herein.

4.1.2 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.1.3 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.1.4 Examination of end item. Defects shall be classified in accordance with lists shown in 4.1.4.1.1 through 4.1.4.1.3.

4.1.4.1 General defects.

4.1.4.1.1 Classification of defects. All defects shall be classified as indicated below except those with an asterisk (*) which shall be classified as follows:

Major defect - When seriously affecting appearance or serviceability.
Minor A defect - When affecting appearance, but not seriously, or when slightly limiting serviceability

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

4.1.4.1.2 General defects.

General defects	Classification			
	Major	(*)	Minor A	Minor B
Cloth defects and damages:				
a. Any hole on				
outside	X			
Underside of waistband, leg hem turnup or underside of placket binding				X
b. Any weakening defects such as smashes, multiple floats, loose slubs, etc. that may develop into a hole on				
outside		(*)		
underside of waistband, leg hem turnup or underside of placket binding				X
c. Unsightly shade bars, slubs, etc., on outside, affecting appearance			X	
d. Needle chews which may develop into a hole		(*)		
e. Scissors or knife cuts, tears, mends, burns, or large exposed drill holes	X			
NOTE: Cloth defects and workmanship damages are to be classified as indicated above only when the condition is one which definitely weakens the structure of the garment, or when it is so conspicuously located as to be clearly noticeable. Non-weakening conditions which are inconspicuous are to be classified as follows: Material defects - No defect; Workmanship damages - Minor B defect				
Shaded parts (applicable to Class 2):				
Any shaded outside part affecting appearance				
seriously			X	
not seriously				X
Cleanness:				
a. Removable spots or stains, clearly noticeable			X	
b. Loose thread or shade tickets not removed or thread ends not trimmed throughout garment				X
c. Ink spots or stains of an obvious permanent nature	X			
Components and assembly:				
a. Any defect of component or assembly (not classified herein):				
1. Affecting appearance:				
seriously			X	
not seriously				X
2. Affecting serviceability:				
seriously	X			
not seriously			X	
b. Any component part or required operation (not classified herein):				
1. Affecting appearance:				
seriously	X			
not seriously				X
2. Affecting serviceability:				
seriously	X			
not seriously			X	
Cutting:				
Any main component part not cut in accordance with directional lines or specification requirements			X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

General defects	Classification			
	Major	(*)	Minor A	Minor B
Seams and stitching:				
a. General:				
1. Part of garment caught in unrelated operation or stitching				
(a) Affecting appearance				
seriously			X	
not seriously				X
(b) Affecting serviceability:				
seriously	X			
not seriously			X	
2. Threads breaks or ends of all stitchings (when not caught in other seams or stitchings) not securely backstitched			X	
3. Seams puckered, twisted or pleated:				
(a) affecting appearance:				
seriously			X	
not seriously				X
(b) affecting serviceability:				
seriously	X			
not seriously			X	
b. Gage of stitching (edge or double stitching):				
1. Irregular, i.e., unevenly gaged, or various stitchings not uniformly gaged, affecting appearance				X
2. Beyond range or width specified or varies more than 1/16 inch when no range is specified				X
3. Less than 1/16 inch from edge			X	
c. Open seams:				
1. Crotch seam:				
one-fourth inch or less			X	
more than 1/4 inch	X			
2. All other seams:				
one-fourth inch or less				X
more than 1/4 inch but not more than 3/4 inch			X	
more than 3/4 inch	X			
NOTE: One or more broken stitches, or two or more continuous skipped or run-off stitches on joining seams constitute an open seam. On double stitched seams, a seam is considered open when either row of stitching is open.				
d. Raw edges:				
1. On outside:				
one-half inch to 1 inch				X
more than 1 inch			X	
2. On inside:				
three-fourth inch to 1-1/2 inch				X
more than 1-1/2 inch			X	
3. Raw edges protruding from folded edge on outside of double needle seam more than 2 inches				X
NOTE: Raw edges not securely caught in stitching shall be classified as an open seam.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

General defects	Classification			
	Major	(*)	Minor A	Minor B
Seams and stitching (con.)				
e. Run-offs (see open seams)				
f. Seam and stitch type:				
Wrong seam or stitch type			X	
g. Stitch tension:				
1. Loose tension resulting in a loose seam	X			
2. Loose tension on edge or raised stitching resulting in a loosely exposed bobbin or top thread			X	
3. Tight tension (stitches break when normal strain is applied to the seam or stitching)	X			
NOTE: Puckering is evidence of tight tension. When puckering is evident, the seam shall be tested by exerting normal pull in the lengthwise direction of seam or stitching.				
h. Stitches per inch (to be scored only when the condition exists on major portion of seam or stitching (12-14):				
1. Less than minimum specified:				
one stitch less				X
two stitches less			X	
three or more stitches less	X			
2. More than maximum				X
i. Stitches skipped or broken (on edge or raised stitching when seam is seamed, turned and stitched):				
one-half to one inch				X
more than one inch			X	
Snap fasteners:				
a. Any part of fastener (stud or socket) omitted or defective, not permitting proper function:				
top snap	X			
middle snap			X	
bottom snap			X	
middle and bottom snap (both)	X			
Label:				
a. Identification and size marking:				
1. Missing, incorrect or illegible			X	
2. Misplaced, i.e., not at inside center back of waistband				X

4.1.4.1.3 Defects applicable to specific parts.

Waistband:				
a. Fullness, twisted, puckered below or above waistband joining seam, affecting appearance:				
seriously			X	
not seriously				X
b. Width at center back:				
less than 1-5/8 inches but not less than 1-1/2 inches				X
less than 1-1/2 inches			X	
more than 1-7/8 inches				X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

General defects	Classification			
	Major	(*)	Minor A	Minor B
Waistband: (con.)				
c. Width at front edge:				
less than 4 inches but not less than 3-3/4 inches				X
less than 3-3/4 inches			X	
more than 4-1/2 inches				X
Elastic insert:				
a. Length				
less than 5-3/4 inches			X	
more than 6-1/4 inches			X	
b. Not color required			X	
c. Web not bartacked	X			
d. Fullness of waistband cloth not properly distributed	X			
e. Less than two rows of stitching to secure waistband and web			X	
f. More than 10 stitches per inch			X	
Flies:				
a. Fly or fly base twisted, puckered, full, bulging or otherwise distorted when closed due to faulty construction or misalignment of studs or sockets, affecting appearance:				
seriously			X	
not seriously				X
b. Fly opening uneven in length:				
by more than 1/4 inch but not more than 1/2 inch				X
by more than 1/2 inch			X	
c. Base of fly not stitched across			X	
Binding:				
a. Attached to front edge insecurely	X			
b. Width:				
less than 1 inch but not less than 7/8 inch				X
less than 7/8 inch			X	
more than 1-1/4 inch				X
c. Turned-back binding at top of right front finished more than ± 1/8 inch from bottom edge of waistband seam				X
d. Left front binding not turned to inside and stitched	X			
Fly bartack:				
a. Omitted or insecure	X			
b. Misplaced			X	
c. Both folds of binding not securely caught in bartack	X			
d. Length less than 7/16 inch			X	
Crotch seam:				
Joined with right front finishing on top of left front			X	
Leg hem:				
Finishing less than 1/4 inch or more than 3/8 inch wide				X
Inside garment:				
NOTE: Examination will be made on the inside of the garment:				
Defects such as open seams, raw edges, etc. will be classified in accordance with 4.1.4.1.2.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

4.1.5 Dimensional examination. Size measurement defects shall be as follows:

Size measurements (see table II)	Any measurement deviating from nominal dimension and tolerance included in table of measurements shall be scored as a size measurement defect.

4.1.6 Inspection levels and acceptable quality levels. Inspection levels and acceptable quality levels (AQL's) expressed in defects per 100 units shall be as follows:

	AQL	Inspection level
For defects listed in 4.1.4.1.2 and 4.1.4.1.3		II
Major	4.0	
Major and Minor A (combined)	10.0	
Total (Major, Minors A and B combined)	25.0	
For defects listed in 4.1.5		S-3
One class defect	4.0	

4.2 Examination of preparation for delivery requirements. An examination shall be made to determine whether packaging, packing, and marking comply with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

Examine	Defect
Markings (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, inadequate stapling, bundles inadequately and insecurely tied, or kraft paper not completely covering contents on top and bottom. Bulged or distorted container.
Content	Number of bundles per shipping container is more or less than required. Number of drawers per bundle is more or less than required. 1/ Size shown on one or more drawers not as specified on shipping container.

1/ For this defect, two bundles from each container in the sample shall be examined.

4.3 Test methods for components.

4.3.1 Colorfastness of polyester sewing thread. Test for colorfastness to combined bleaching and laundering shall be in accordance with method 5610 of Fed. Std. No. 191.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A, B, or C as specified (see 6.2).

5.1.1 Level A or B. Each pair of drawers shall be folded in accordance with commercial practice approximately 11 by 7-1/4 inches. Three pairs of drawers of one type, class and size only, with the waistbands alternated top to bottom, shall be packaged in a close-fitting, flat style, clear, polyethylene film bag not less than 0.00125 inch thick. An opening shall be provided in the bag to allow excess air to excape.

5.1.2 Level C. Drawers shall be packaged in accordance with the suppliers commercial practice.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Drawers, in quantities as specified, of one type, class and size only, shall be packed in a close-fitting box conforming to PPP-B-636, class weather resistant. The box shall be closed and waterproof sealed in accordance with the appendix to the box specification.

5.2.2 Level B. Drawers shall be packed as specified in 5.2.1 except that the box shall be class domestic and waterproofing will not be required.

5.2.3 Level C. Drawers, packaged as specified in 5.1, shall be packed to insure carrier acceptance and safe delivery at destination at lowest rates in containers complying with the Uniform Freight Classification Rules or National Motor Freight Classification Rules as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123 or MIL-STD-129, as applicable.

5.3.1 Additional marking. In addition, each package of drawers shall be marked to indicate, or a printed sheet of information shall be enclosed within, with the following information: Stock Number, Nomenclature, Type _____, Class _____, Size _____, and Quantity _____

6. NOTES

6.1 Intended use. Drawers are intended for use by male personnel.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type, class, and size required (see 1.2.1).
(c) Preproduction sample (see 3.2).
(d) Packaging and packing (see 5.1 and 5.2).


6.3 Samples. For access to guide samples of the end item, address the procuring activity issuing the invitation for bids.

Civil Agency Coordinating Activities:


GSA-FSS

GSA DC 72-12235

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

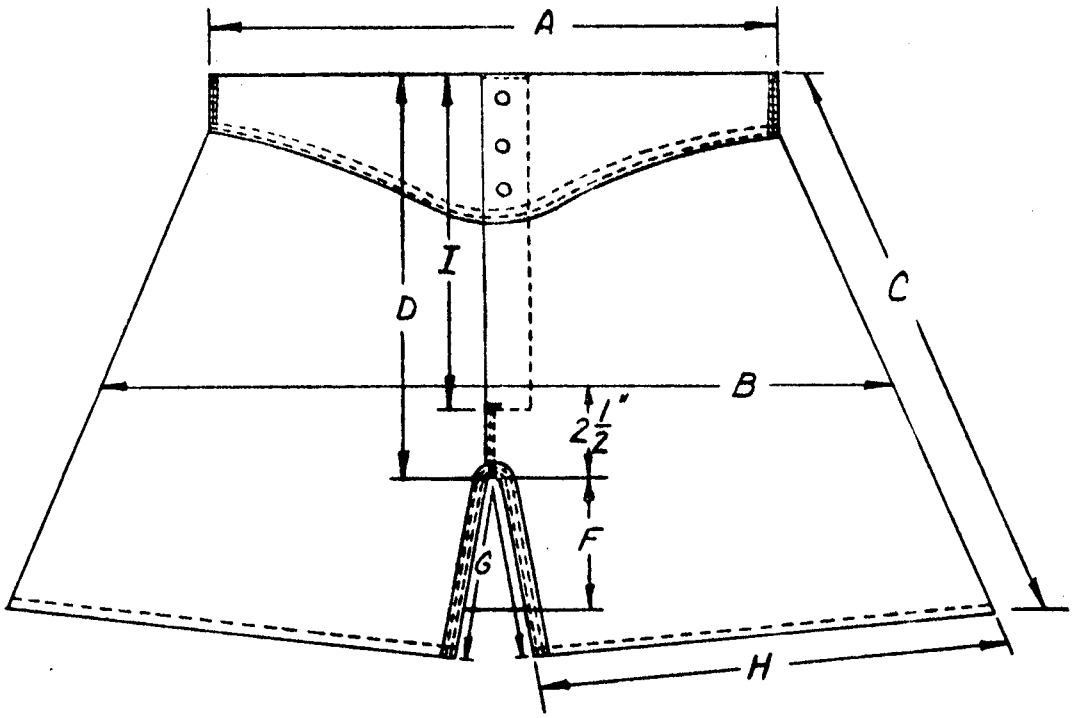

FRONT

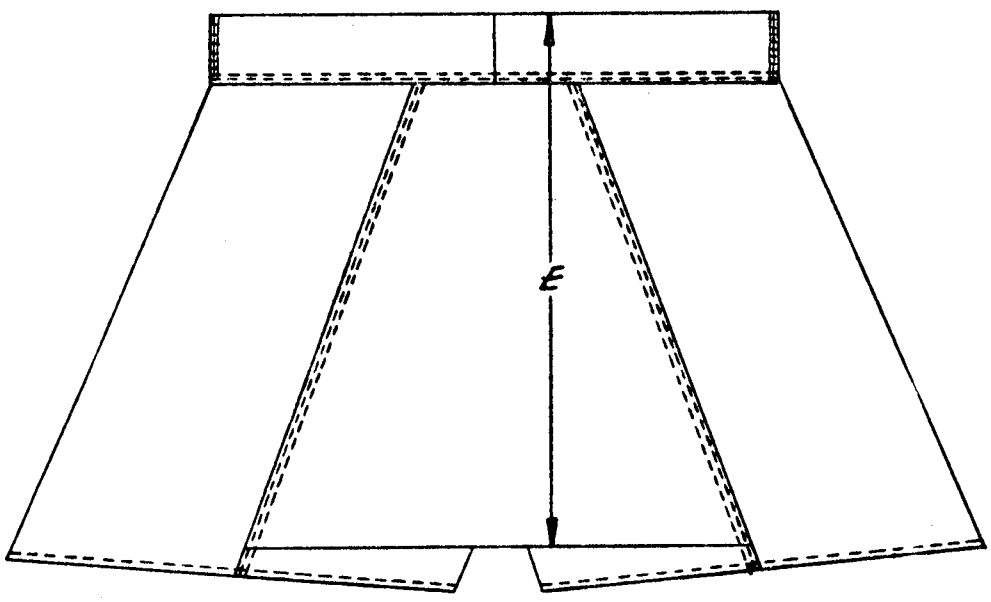

BACK

FIGURE 1.—Drawers, men's, **thigh length**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.