DDD-E-940
October 31, 1963

SUPERSEDING
Int. Fed. Spec. UU-E-00940a (GSA-FSS)
July 8, 1963 and
Fed. Spec. UU-R-196a
July 26, 1951

FEDERAL SPECIFICATION

EYELET REINFORCEMENT, GUMMED, CLOTH

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. Gummed eyelet reinforcements covered by this specification are made to fit around punched holes of loose-leaf sheets for reinforcement.

1.2 Classification.

1.2.1 *Types.* Eyelet reinforcements covered by this specification shall be of the following types, as specified (see 6.2):

Type I.—3/8-inch diameter; 1/8-inch-diameter hole.

Type II.—1/2-inch diameter; 3/16-inch-diameter hole.

Type III.—9/16-inch height of triangle; 1/4-inch diameter hole.

Type IV.—3/4- by 1/2 inch; 7/16 by 3/16-inch hole.

Type V.—9/16-inch diameter; 1/4-inch-diameter hole.

Type VI.—15/16-inch diameter; 3/8-inch-diameter hole.

Type VII.—15/16-inch diameter; 3/8-inch-diameter hole with slot.

Type VIII.—7/8-inch diameter; 1/2-inch-diameter hole.

Type IX.—1-3/16 by 5/8 inch; 11/16- by 3/16-inch hole with slot 1/8 inch wide.

Type X.—1-13/16 by 5/16 inch; three 1/8-inch-diameter holes.

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification to the extent specified herein:

Federal Specifications:

UU-P-320 — Paper, Loose-Leaf, Ruled and Blank.

CCC-T-191—Textile Test Methods.

PPP-B-566 — Boxes, Folding, Paperboard.

PPP-B-636—Box, Fiberboard.

PPP-B-676—Boxes, Set-Up, Paperboard.

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.

Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, and Auburn, Wash.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:35Z
Check the source to verify that this is the currentversion before use.

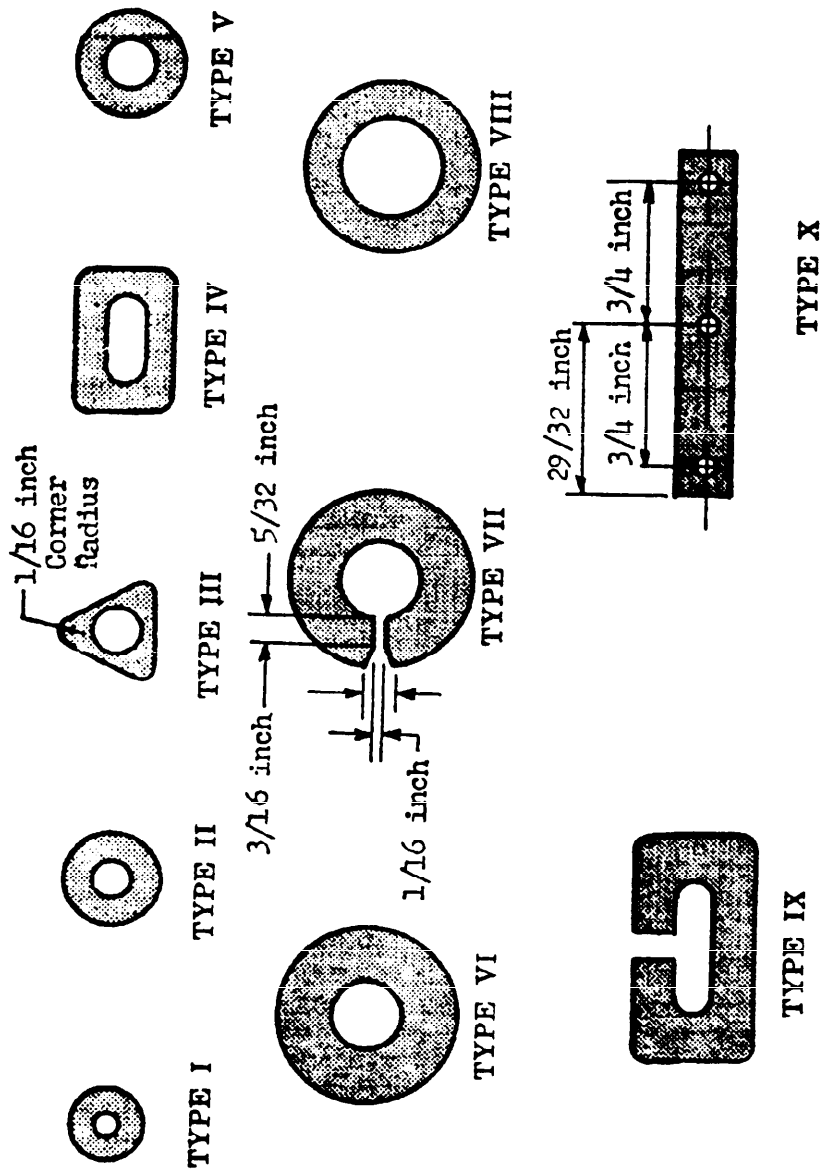


Figure 1.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:35Z
Check the source to verify that this is the current version before use.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 — Sampling Procedures and Tables for Inspection by Attributes.

MIL-STD-129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials.

3.1.1 *Cloth.* Cloth for eyelet reinforcements shall be bleached cloth and shall have a thread count not less than 52 in the warp and 45 in the filling. The cloth shall have a tearing strength of not less than 300 grams in the warp direction and 175 grams in the filling direction.

3.1.2 *Gum.* Eyelet reinforcements shall have a smooth, uniform coat of gum on one side. When moistened with water and pressed against bond paper, the eyelet reinforcement shall adhere to the paper in such a manner that the eyelet cannot be removed without tearing the surface of the paper. The gummed surface shall have no tendency to block, that is, to become sticky or adhere to bond paper at high humidity (see 4.4.2). The gum shall be free from objectionable odor or taste.

3.2 Sizes. Sizes and dimensions shall be as indicated in table I; additional dimensions for types III, VII, and X shall be as shown in figure 1.

3.3 Holes, slots, and openings. Holes in all eyelet reinforcements shall be of diameter specified in table I and shall be centered. Slots and openings of the various types of gummed eyelets shall be dimensions specified in table I and as shown in figure I and shall be centered.

TABLE I.—*Types, sizes, and punchings*

Type	Size[1]	Punching[1]
I ...	3/8-inch diameter	1/8-inch-diameter hole
II ...	1/2-inch diameter	3/16-inch diameter hole
III ...	9/16-inch height of triangle	1/4-inch-diameter hole
IV ...	3/4 by 1/2 inch	7/16 by 3/16 inch
V ...	9/16-inch diameter	1/4-inch-diameter hole
VI ...	15/16-inch diameter	3/8-inch-diameter hole
VII ...	15/16-inch diameter	3/8-inch-diameter hole with slot
VIII ...	7/8-inch diameter	1/2-inch-diameter hole
IX ...	1-3/16 by 5/8 inch	11/16- by 3/16-inch hole with slot 1/8 inch wide
X ...	1-13/16 by 5/16	Three 1/8-inch-diameter holes

[1] In all circular dimensions, a tolerance of plus or minus 1/32 inch will be permitted; in all straight-line dimensions a tolerance of plus or minus 1/16 inch will be permitted.

3.4 Color. The gummed eyelet reinforcements shall be white.

3.5 Workmanship. Materials used in the manufacture of the eyelet reinforcements shall be of good commercial quality. All edges shall be cleancut, and the gummed cloth eyelets shall be free from defects in material and workmanship.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Supplier's responsibility. Unless otherwise specified (see 6.1), the supplier is re-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

sible for the performance of all inspec- requirements as specified herein. Ex- as otherwise specified, the supplier utilize his own or any other inspection ities and services acceptable to the Gov- ent. Inspection records of the examina- and tests shall be kept complete and lable to the Government as specified in contract or order. The Government re- es the right to perform any of the in- tions set forth in the specification re such inspections are deemed neces- to assure supplies and services con- to prescribed requirements. (See 6.1.)

2 Sampling.

2.1 *Size of lot.* All eyelet reinforcements he same type, presented for delivery at time, shall be considered a lot for the ose of examination.

2.2 *Sampling of visual and dimensional ination.* Random sample boxes of eye- einforcements shall be taken from each n accordance with MIL-STD-105, Inspec- Level L3. Lot acceptance or rejection be based upon an Acceptable Quality l (AQL) of 4.0 percent defective. The ple unit shall be one box, except that eyelet reinforcements, taken at random the box, shall be examined as in 4.3.1. ere are one or more defects in the sam- f ten eyelet reinforcements taken from box, the whole box shall be considered ctive and shall be rejected.

2.3 *Sampling for tests.*

2.3.1 *Materials.* When specified, sam- of cloth shall be furnished in order to rmine compliance with the applicable rial requirements of this specification 3.1.1) when tested in accordance with for materials in 4.4.1. This specifica- shall apply in all other respects. When ified, the manufacturer shall furnish rtificate that the material submitted for is made from the same materials, un- the same or equivalent conditions, as e used in the manufacture of the eye- reinforcements delivered.

4.2.3.1.1 *Size of cloth.* The cloth sample shall be not less than 18 inches in length and the full width of the cloth.

4.2.3.2 *End item.* Random sample boxes of eyelet reinforcements shall be taken from each lot as specified in 4.2.2. The same sample lot used for visual examination shall be subjected to the test requirements of this specification, and the same provision for defects shall apply.

4.3 Examination.

4.3.1 *Visual and dimensional examination.* Samples taken as specified in 4.2.2 shall be visually examined to determine compliance with the shape, dimensional, color and workmanship requirements of this specification. Any sample unit containing one or more visual defects shall be rejected. If the number of defective samples exceeds the acceptance number for that sample, the lot represented by the sample shall be rejected.

4.4 Tests.

4.4.1 *Tests for materials.* Samples obtained in accordance with 4.2.3.1 shall be subjected to the following tests. Failure to pass the tests for materials shall be considered cause for the rejection of the lot as not meeting the material requirements of this specification.

4.4.1.1 *Cloth.* The samples shall be tested in accordance with the following test methods described in CCC-T-191:

Yarns per inch in woven fabric—TEST METHOD NO. 5050.

Identification of cotton—TEST METHOD 1200.

Strength of cloth, tearing—TEST METHOD 5136, except that the report shall be made to the nearest gram.

4.4.2 *Tests for end item.* Samples selected in accordance with 4.2.3.2, shall be subjected to the following tests. If the number of defective samples exceeds the acceptance number for the sample, the lot represented by the sample shall be rejected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

4.4.2.1 *Adhesion of gum.* The gummed surface of ten eyelet reinforcements shall be moistened and pressed against ten pieces of bond paper, one eyelet to each sheet of paper. After 2 hours of drying, any eyelets which curl or can be removed without tearing the surface of paper shall be cause for rejection. Paper used for tests shall conform to UU-P-320.

4.4.2.2 *Blocking of gum.* Condition 10 eyelet reinforcements and 10 sheets of paper of suitable size at 70° ± 2°F. and 80 ± 2 percent relative humidity for 24 hours. The paper shall conform to UU-P-320. At the end of the conditioning period, stack the eyelets evenly, interleaf with paper, apply a pressure of 4 pounds per square inch to the stack, and allow it to remain in the stated atmospheric condition for another 24 hours. Condition the stack then, with the pressure still applied, for 24 hours at 70° ± 5°F. and 65 ± 2 percent relative humidity. The eyelets shall be examined for blocking (adherence of the adhesive to the paper).

5. PREPARATION FOR DELIVERY

For civil agency procurement, Fed. Std. No. 102 should be referred to for the definitions and applications of levels of packaging and packing.

5.1 **Packaging.** Packaging shall be level A, B, or C, as specified (see 6.1).

5.1.1 *Level A.* One hundred eyelet reinforcements of one type shall be packaged in a box conforming to PPP-B-676, type IV. Each box shall be sealed and closed in accordance with the appendix to the box specification.

5.1.2 *Level B.* One hundred eyelet reinforcements of one type shall be packaged in a paperboard slide cover box. The base shall be made from a one-piece wrap or corner cut blank. The slide shall be made from a one-piece wrap or a one-piece blank with flange.

5.1.3 *Level C.* The eyelet reinforcements shall be packaged in accordance with the supplier's commercial practice.

5.1.4 *Intermediate packaging.* Unless otherwise specified (see 6.1), twelve boxes of 100 each shall be intermediate packaged in boxes conforming to PPP-B-566, style II, type A or B; style III, type A; or to PPP-B-676, type I or II. The boxes shall be sealed and closed in accordance with the applicable box specification.

5.2 **Packing.** Packing shall be level A, B, or C, as specified (see 6.1).

5.2.1 *Level A.* The eyelet reinforcements shall be packed in boxes conforming to PPP-B-636, class 2, V3c, style optional. The boxes shall be waterproof sealed with tape and reinforced with bands of filament tape in accordance with the appendix to the box specification.

5.2.2 *Level B.* Forty-eight intermediate packages of twelve units (576) packages shall be packed in a box conforming to PPP-B-636, type I, class 1, style optional. The box shall be closed and sealed in accordance with the appendix to the box specification.

5.2.3 *Level C.* The eyelet reinforcements shall be packed to insure carrier acceptance and safe delivery to destination in containers complying with the rules and regulations applicable to the mode of transportation.

5.3 **Marking.**

5.3.1 *Civil agencies.* In addition to markings required by the contract or order, the shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 *Military activities.* In addition to markings required by the contract or order, the shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 **Ordering data.** Purchasers should exercise any desired options offered herein (see 4.2.3.1 and 5.1.4), and procurement documents should specify the following:

(a) Title, number, and date of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

) Type of eyelet required (1.2.1).
) Inspection responsibility if other than as specified herein; and administrative provisions for inspection records, when applicable (4.1).
l) Level of packaging and packing, and any special marking required (5.1, 5.2, and 5.3).

1.1 *Standard pack (civil agencies).* The dard pack requirements, including mark- in 5.1.2 (level B), 5.1.4, 5.2.2 (level B), 5.3.1 are intended for use in procure- t of Stores Stock replenishments. Pro- ng officers should use the standard pack isions when it is known that the mate- will be shipped from a supplier to a estic warehouse, supply depot, or inter- iate storage point for temporary stor- subsequent issue, or shipment to even- user.

.2 **Transportation data.** Transportation riptions and minimum weights applica- to this commodity are:

ail:

Eyelets, not otherwise indexed by name, other than iron or steel.
Carload minimum weight 30,000 pounds.

lotor:

Eyelets, not otherwise indexed.
Truckload minimum weight 30,000 pounds, subject to Rule 115, National Motor Freight Classification.

6.3 The title of this specification has been changed from Reinforcements, Gummed (Cloth), (UU-R-196a), to Eyelet Reinforcement, Gummed, Cloth.

6.4 It is believed that this specification adequately describes the characteristics necessary to secure the desired material, and that normally no samples will be necessary prior to award to determine compliance with this specification. If, for any particular purpose, samples with bids are necessary, they should be specifically asked for in the invitation for bids, and the particular purpose to be served by the bid sample should be definitely stated, the specification to apply in all other respects.

6.5 This specification covers only the types, sizes, etc., of the commodity as generally purchased by the Federal Government, and is not intended to include all of the types, etc., which are commercially available.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.