DDD-S-486b
APRIL 4, 1960
SUPERSEDING
Int. Fed. Spec. DDD–S–00486a(GSA–FSS)
June 20, 1958

FEDERAL SPECIFICATION

SMOCK, MAN'S; GENERAL PURPOSE

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. — This specification covers the requirements for cotton smocks of either closed or reversible front construction primarily intended for use by laboratory technicians, dental assistants, and medical assistants.

1.2 Classification.

1.2.1 *Types and sizes.*—The smocks covered by this specification shall be of the following types and sizes as specified:

Type I.—Standing collar, short sleeves, and fastened down back. (See figure 1.)

Size: Large.

Type II. — Wrap-around, reversible front style, V-shaped neck opening, with belt ties. (See figure 2.)

Sizes: Small.
Medium.
Large.

1.2.2 *Classes and grade of cotton cloth.*— smocks covered by this specification shall be made from cotton cloth of the following classes, as specified, and grade known commercially as firsts:

Class 1.—Jean.

Class 2.—Sheeting.

2. APPLICABLE SPECIFICATIONS, STANDARDS, AND OTHER PUBLICATIONS

2.1 Specifications and standards.—The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification:

Federal Specifications:

V–T–276—Thread, Cotton.
UU–P–268—Paper, Kraft, Wrapping.
UU–T–111 — Tape, Paper, Gummed (Sealing and Securing).
CCC–C–444—Cloth, Cotton, Jean (Bleached).
CCC–T–191—Textile Test Methods.
DDD–L–20—Label, Cotton, Woven, General Use.
DDD–T–86 — Tape; Cotton, Bleached, Dyed, or Grey, General-Use.

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.
Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).
Fed. Std. No. 751—Stitches: Seams; and Stitching.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, Seattle, and Washington, D. C.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

Military Specification:

MIL–B–3149—Baling of Clothing and Equipage.

Military Standards:

MIL–STD–105 — Sampling Procedures and Tables for Inspection by Attributes.

MIL–STD–129 — Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.—The following document forms a part of this specification. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply.

COLOR ASSOCIATION OF THE UNITED STATES, INC.

United States Army Standard Color Card for the Official Shades of Sewing Threads.

(Application for copies should be addressed to the Color Association of the United States, Inc., 200 Madison Avenue, New York 16, New York.)

3. REQUIREMENTS

3.1 Materials.

3.1.1 *Cotton.*

3.1.1.1 *Cotton for class 1 cloth (see 3.1.4).*

3.1.1.2 *Cotton for class 2 cloth.*—The cotton shall be of a suitable length of staple and grade to meet the requirements of this specification.

3.1.2 *Yarn.*

3.1.2.1 *Yarn for class 1 cloth (see 3.1.4).*

3.1.2.2 *Yarn for class 2 cloth.*—The cotton used in the manufacture of the yarn shall be thoroughly cleaned, well carded, drawn, and evenly spun.

3.1.3 *Tape.*—The tape shall be tape, cotton, bleached, 5/8 inch wide, conforming to the requirements of table I of Federal Specification DDD–T–86. When colored tapes are required, the tape shall be fast to light, laundering, perspiration, chlorine bleaching and wet drycleaning when tested as specified in table VI of this specification. The color of the tape shall be a close match to the color of the basic cloth.

3.1.4 *Thread.*—The thread shall conform to Federal Specification V–T–276 type IA2, 3 ply, ticket number 50 when white smocks are specified, and type IA3, 3 ply, ticket number 50 of a matching shade when colored smocks are specified.

3.1.4.1 *Colored thread.*—The colored thread shall show good colorfastness to light, laundering, wet drycleaning, perspiration, and chlorine bleaching when tested in accordance with methods specified in Federal Specification V–T–276. The use of sulfur dyes and dyes containing elementary sulphur or sulphur compounds capable of oxidation to sulphuric acid is prohibited unless specifically authorized. The thread shall be tested for the presence of sulphur in accordance with 4.2.2 of Federal Specification V–T–276.

3.2 Color.

3.2.1 *Type I smock (class 1 cloth).*—The color of the cloth (Jean) shall be grey shade, Cable No. 13830 (Silvertone) (see 2.2).

3.2.2 *Type I smock (class 2 cloth) and type II (classes 1 and 2 cloth).*—The cloth

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

shall be bleached white or dyed the color specified. When colored smocks are specified, vat dyes shall be used to produce a color that matches the approved standard shade. (See 6.1).

3.2.3 *Color matching.* — The color shall match the approved standard shade under natural (north sky) daylight or artificial daylight having a color temperature of 7500° Kelvin and shall be a good approximation to the standard shade under incandescent lamplight at 2800° Kelvin.

3.2.4 *Colorfastness.*—The dyed and finished cloth shall show colorfastness to laundering, wet drycleaning, perspiration, crocking, and light equal to or better than the standard sample when tested as specified in table VI. When no standard sample is available or when the standard sample is not a reference for colorfastness, the dyed and finished cloth shall show good colorfastness to chlorine bleaching, crocking, wet drycleaning, light after 40 standard fading hours, laundering, and perspiration, when tested as specified in table VI.

3.3 Physical requirements. — The class 2 finished cloth shall conform to the requirements shown in table I. The class 1 finished cloth shall conform to the requirements of Federal Specification CCC–C–444.

3.3.1 *Finish (class 2 cloth).* — The cloth shall be closely singed, desized, and bleached. Residual size, finishing, and other nonfibrous material shall not exceed 2 percent when tested as specified in table VI.

3.3.2 *Shrinkage (class 2 cloth).*—The cloth shall be preshrunk and the residual shrinkage shall be not more than 2 percent in either the warp or filling directions when tested as specified in table VI. The preshrinking process used shall not be identified by name or trade-mark, on either the cloth, ticket, or package.

3.3.3 *Seam efficiency.*—Unless otherwise specified (see 6.1) class 2 cloth shall have a seam efficiency of not less than 80 percent, when tested as specified in table VI.

3.4 Construction.

3.4.1 *Type I smock (see fig. 1).*

3.4.1.1 *Body of smock.*—The body of the smock shall be made of three panels of cloth; one for the front, one for the right back, and one for the left back. Seams in the body of the smock shall be over each shoulder and down each side. The right-back panel of the smock shall have a full-length hem not less than 3 inches wide, and the left-back panel a full-length hem not less than 1¼ inches wide. The hem shall be of the same cloth as the body of the smock. The right-back panel shall overlap the left-back panel by not less than 3 inches. The bottom of the smock shall be finished with a hem not less than 1 inch wide, with a turnunder of not less than ¼ inch. Fronts shall overlap back at sides and shoulder seam.

3.4.1.2 *Collar.*—The collar shall be a vertical stand-up collar made of two pieces of the smock material. The collar shall be tied in the back by means of tying tapes. The upper edge and ends of collar shall have two rows of stitching 3/16-inch to ¼-inch gage using seam and stitching type SSe–2 with 12-16 stitches per inch and stitch type 301. A verti-

TABLE I.—*Physical requirements of cloth*

Class	Weave	Ply		Weight per sq. yd. ozs.		Yarns per inch (minimum)		Breaking strength (minimum) lbs.	
		Warp	Filling	Min.	Max.	Warp	Filling	Warp	Filling
2	Plain	1	1	5.8	6.2	52	52	58	72

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

cal button hole, ¾ inch long, plus or minus ⅛ inch, shall be sewed at the rear of the collar not less than 4 inches from the right end, to serve as a slot to permit adjustment of collar by means of tying tapes. One tying tape shall be centered and securely stitched between the plies at the left end of the collar. The other tying tape shall be centered and securely stitched between the plies at the right end of the collar. Tapes shall be stitched in the shape of a rectangle not less than ½ by ¾ inch. The collar line in front, prior to attachment of collar, shall be cut out so that the center line of the collar in front shall be 2 inches ± ⅛ inch lower than the center of the back of the collar. Buttonhole shall be straight style, bartacked at each end and finished with a buttonhole stitch.

3.4.1.3 *Sleeves.*—Each sleeve shall be made of not more than two pieces of cloth, all piecing to be laid straight on the warp of the cloth with seams far enough to the back of the sleeve to prevent any seam of the sleeve from being visible from the front. When the sleeve is of one-piece construction, the seam shall run from the cuff opening to the side seam in the body of the smock under the arm. When two pieces of cloth are used, the sleeve shall have one seam running from the cuff opening to the side seam in the body of the smock, and one seam running from the cuff opening to the armhole seam approximately 1½ inches below and to the rear of the shoulder seam. The cuff opening of the sleeve shall be finished with an even hem not less than 1 inch wide, with a turnunder of not less than ¼ inch. The sleeve shall fit the armhole of the smock without puckering.

3.4.1.4 *Belt.*—A belt of the same fabric as the smock, not less than 68 inches long and not less than 1¼ inches wide, with a ⅜ ± ⅛ inch turned under hem on each edge, shall be placed across the front center of the smock 14 inches, plus or minus ½ inch, below the neck seam. It shall be attached at its middle by sewing along top and bottom edges for a distance of not less than 5 inches in each direction from the center line of the smock and across its width to form a rectangle. The rectangular attachment of the belt shall be reinforced by stitching through the front of the smock to a piece of cloth not less than 12 inches by 3 inches placed inside the smock and in symmetrical opposition to the attachment. Rectangular reinforcing shall have a ⅜ ± ⅛ inch turned under hem on sides and ends sewn 10-14 stitches per inch ¼ ± ⅛ inch from folds with stitching type EFa–1. Seam and stitching type SSc–1 or SSc–2 with stitch type 301 shall be used in making the belt, stitch on fold 1/16 to ⅛ inch from edge with stitch type 301 and seam and stitching type OSf–1. The free ends of the belt shall be turned in ¼ ± 1/16 inch and securely stitched, using stitch type 301, seam and stitching type EFb–1 with 10-14 stitches per inch.

3.4.1.5 *Front facing piece.*—A facing piece not less than 10 inches long and 2½ inches wide, with a point not less than 1 inch at the lower end, shall be fully sewed along its edges vertically to outer front center of smock. The square end shall be sewed between the plies of the collar at the neck line. Single stitch edges of facing through front 1/16 to ⅛ inch from edges. Stitch type shall be 301, seaming and stitching type EFa–1 with 10-14 stitches per inch.

3.4.1.6 *Tying tapes.*—There shall be one pair of tapes of the same color as the smock, each not less than 16 inches long and ⅝ inch wide (see 3.2.1.2).

3.4.1.7 *Measurements.* — Unless otherwise specified, the smocks shall be made in accordance with the measurements shown in table II.

3.4.2 *Type II smock (see fig. 2).*

3.4.2.1 *Body of smock.*—The body of the smock shall be constructed of four panels of cloth: A two-piece front and a two-piece back. The back pieces shall be joined together at the center of the back (with a seam extending from the back of the neck to the bottom of the garment) and joined to the two front pieces at the sides of the garment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

TABLE II.—*Finished measurements—type I (see figure 1)*

Key Points	Inches	Tolerance (Inch)	
		Plus	Minus
Length, center line (exclusive of collar) (A)	48	1	1
Circumference 1 inch below armholes (B)	60	1	1
Circumference at bottom (C)	72	1	1
Collar, length (circumference without overlap) (D)	20	½	¼
Collar, height (E)	1¾	⅛	⅛
Shoulder seam, length (F)	8½	¼	¼
Armhole circumference (G)	24	1	½
Sleeve (top), length (H)	16	½	¼
Sleeve inseam length	12	½	¼
Sleeve cuff, circumference (I)	18	¼	¼
Hem, left side	1¼	⅛	⅛
Hem, right side	3	⅛	⅛
Hem, bottom	1	⅛	⅛
Hem, belt	¼	⅛	⅛
Tapes, length (from point of attachment)	16	¼	¼

Smocks shall open the full length in the front, with the edges of the opening crossing and overlapping in a manner comparable to a double-breasted coat. Each front section shall be of sufficient fullness to insure ease of reversibility, adequacy of fit and V-shaped neck appearance when the garment is closed on either the right or left side. The "V" opening thus created shall extend approximately 5 inches below the front of the regular neck line. Edges of the neck opening shall be reinforced in the back by a facing piece applied to the inside of the opening, and reinforced in the front (along each side of the "V" and continuing on down along the edges of the front opening to the belt-ties) by binding pieces or facings. These latter facings, when folded and attached to the body of the smock, shall be approximately 1 inch wide. This facing or binding shall be so applied as to give a double thickness of material all around the neck and down as far as the belt. The front edges from the belt ties to the bottom of the garment shall be hemmed so as to give a double thickness of material of approximately 1 inch, with a turnunder of not less than ¼ inch. Fronts shall overlap backs at sides and shoulder seams. The facing shall be seamed to the front edge $\frac{1}{16}$ to ⅛ inch from edge with seam and stitching type LSd–1, stitch type 301 and stitches per inch 10-14.

3.4.2.2 *Sleeves.*—The sleeves of the smock shall be of three-quarter length, with the bottom edges extending approximately 4 inches below the inside of the elbow. Each sleeve shall be constructed of one piece of material. Armholes shall be of regular type, full-cut to allow ample freedom of movement, and the sleeves shall be cut and attached to fit armholes smoothly and without puckering or gathering.

3.4.2.3 *Pocket.*—The pocket of the smock shall be a patch type, slightly pointed at the bottom, applied on the outside of the garment at the left breast position.

3.4.2.3.1 *Set breast pocket.* — Large-size smocks shall have the center of the breast pocket positioned 5½ inches ± ¼ inch from front center of smock and the top edge of pocket hem shall be 8 inches ± ½ inch from center of shoulder seam. Medium and small sizes shall have the breast pocket positioned proportionately. The pocket shall be uniformly stitched with the sides and bottom equidistant from each edge. The finished pocket shall measure 5 inches ± ½ inch wide

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

and 6 inches ± ½ inch deep. Turn in raw edges of the sides and bottom and stitch to front 3/16 to ¼ inch from each edge with the ends of stitching securely backstitched; stitch type; seam and stitching type and stitches per inch shall be 301, LSd–1 and 12-16 respectively. The pocket hem as shown on figure II shall finish 1 ± ¼ inch wide using stitch type and stitches per inch as above with seam and stitching type OSf–1.

3.4.2.4 *Belt ties and slits.* — The belt ties shall be fastened in an apron string manner to the edges of the front opening at the (angle) points where the edges of the smock turn vertically downward (the approximate waistline). Each tie shall be fastened to the inside of the front opening edges so that the end of the tie shall coincide with the hem line (and inner-facing edge) of the front opening. Ties shall be made of double thickness of same fabric as the smock. (See figure 2.) Belt slits (or openings) shall be approximately 6 inches below the base of the armholes and about 4 inches (forward) from side seams. Slits shall each have a reinforcement piece, approximately 3½ inches in vertical dimension, applied to the inside of garment. Reinforcement pieces shall be so applied that, by doubling back one side of the piece (and stitching same in place) the opening is covered from the inside to conceal underclothing of the wearer without obstructing the passage of the belt through the openings.

3.4.2.5 *Measurements.* — Unless otherwise specified, smocks shall be made in accordance with the measurements shown in table III.

3.4.2.6 *Hems.*—The sleeves, top of pocket, and lower sections (from the belt ties to the bottom hems) of each edge of the front opening of the smock shall have a single-stitched,

TABLE III.—*Finished measurements—type II (see fig. 2)*

Key Points	Size			Tolerance (inch)	
	Small	Medium	Large	Plus	Minus
	Inches	*Inches*	*Inches*	*Inch*	*Inch*
Length of garment (from back of neck to bottom) (A)	37	39	41	1	1
Length of shoulder seams (B)	7	7½	8	¼	¼
Sleeve length (outside) (C)	14½	15½	16½	½	¼
Sleeve length (inseam) (D)	11	11½	12	½	¼
Circumference of sleeve opening (bottom) (E)	13½	14½	15½	1	1
Circumference of armholes (F)	20	21	22	1	½
From edge of front opening (at the belt) to side seam (G)	13	15½	18	¼	¼
From belt slit to side seam (H)	2	2½	3½	⅛	⅛
Length of edge of front opening from shoulder seam to belt tie (I)	19	19½	20	¼	¼
Width across full back from shoulder seam to shoulder seam where sleeve head is joined (J)	17½	18½	19½	¼	¼
Width across full back from side seam to side seam at belt (waist) line (K)	21½	23	24½	¼	¼
Length of side seams (L)	26	27	28	½	½
Length of each belt tie (over all)	28	30	32	½	½
Width of belt ties	1⅝	1⅝	1⅝	⅛	⅛
Length of belt slit (M)	2	2	2	¼	¼
Circumference of bottom of garment (N)	56	64	72	½	½
Finished facing of belt slit	2½ x 3½	2½ x 3½	2¼ x 3½	⅛	⅛
Pocket	4½ x 5½	4½ x 5½	4½ x 5½	¼	¼

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

finished hem measuring not less than 1 inch wide. The bottom of the garment shall have a single-stitched, finished hem measuring not less than ½ inch wide. All hems shall have a turn under of not less than ¼ inch. All hems shall use seam type EFb–1. There shall be no raw edges showing. Ends of hem shall be stitched.

3.4.3 *Hanger loops.*—Both types of smocks shall have a hanger loop of the same material as the smock sewed into the inside of the smock just below the bottom of the collar or neck facing. Fold hanger with the side edges turned to the inside, and single stitch top and bottom 1/16 to ⅛ inch from each edge. The hanger shall finish ⅜ inch ± ⅛ inch wide and 2½ inches ± ¼ inch long. Stitch type 301 or 401; seam and stitching type SSc–2; stitches per inch 10-14 or the hanger may be made on a belt loop machine using a covering stitch on the underside. The finished measurements shall be as above; stitch type 406; seam and stitching type EFh–2 with 10-14 stitches per inch.

3.4.4 *Labels.*—Both types of smocks shall have an identification label and type II a size label, conforming to the requirements of Federal Specification DDD–L–20. Labels shall be stitched, with all edges turned in, upon the inside facing below the hanger loop and stitched with 10 to 12 stitches per inch.

3.4.4.1 *Colorfastness.*—Printed labels shall not show offsetting, smearing or bleeding. The labels shall be clearly legible and show fair fastness to laundering after subjection to 15 laundering tests when tested as specified in Federal Specification DDD–L–20. In addition the printing shall be clearly legible and show good fastness to crocking and fair fastness to transference when tested as specified in Federal Specification DDD–L–20.

3.4.4.2 *Identification label.*—The contractor's label shall measure not less than 2¾ by 2½ inches. The nomenclature shall be printed in letters 3/32 inch in height and the remaining information in letters ⅛ inch in height. A blank space shall be provided for the inspector's stamp. The label content shall be as follows:

Nomenclature.
Contractor's name.
Date and number of contract.
Fed. Spec. No. DDD–S–486b.
Name of contracting bureau or agency.

3.4.4.3 *Size label.* — The size label shall measure not less than 1½ by 1½ inches, and shall contain the size and stock number. The size shall be marked in letters not less than ¼ inch in height and the stock number in numerals not less than ⅛ inch in height. For example:

Medium
Stock Number

3.4.5 *Adhesive shade tickets.* — Adhesive shade tickets, when used for shade marking, shall be of paper with a thermo activated adhesive applied on one side that will withstand moderate steam pressing operations. The adhesive shall not discolor the material and the adhesive mass shall not adhere to the material upon removal of the ticket.

3.4.6 *Stitches, seams, and stitching.* — The stitch and seam types specified herein shall be in accordance with Federal Standard No. 751. Seams shall be lapped, felled, and double stitched not less than 3/16 inch nor more than 5/16 inch apart to prevent raw edges; seams shall be LSc–2, except where otherwise specified, except that seam type LSe–1 shall be used for attaching the collar to the body. All stitching shall contain not less than 14 nor more than 16 stitches to the inch, except where otherwise specified. Stitching shall be either type 301 or 401, except that all stitching on the collar, neck, belt and all hems shall be type 301 only. Where stitch type 401 is used the looper or under thread shall be on the inside of the garment. The ends of all lines of stitching, including ends due to the thread breaks, shall be backstitched for a length of not less than ½ inch, except where anchorage is provided by other seams or stitching.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

3.5 Cleaning and pressing.—Smocks shall be pressed smooth. All thread ends shall be trimmed. All loose threads, pin tickets, spots, and stains shall be removed.

3.6 Guide sample.—When required, samples are furnished as a guide only. Variations from the specification may appear in the sample, in which case the specification shall govern. Quality and construction shall be equal to the guide sample in all respects not covered by the specification. (See 6.4.)

3.7 Preproduction sample approval.—When specified, before production is commenced the contractor shall submit a finished smock to the contracting officer for approval.

3.8 Workmanship. — The finished smock shall conform to the quality of product established by this specification.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Contractor's inspection responsibility.—Unless otherwise specified herein, the supplier is responsible for the performance of all inspection requirements prior to submission for Government inspection and acceptance. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order.

4.2 Civil agencies.—Civil agencies may use sampling, inspection and test procedures outlined under paragraph 4.3 when desirable. When procedures outlined under 4.3 are not deemed suitable, the procedures specified under civil agency paragraphs shall be followed.

4.2.1 *Sampling.*

4.2.1.1 *Inspection lot.* — Unless otherwise specified in the invitation for bids, all smocks of the same class, type, and color submitted at one time shall be considered a lot for purposes of inspection.

4.2.1.2 *Sampling for inspection.* — A random sample of smocks shall be taken from each lot in accordance with table IV. (See page 14 for Table IV.)

4.2.1.3 *Sampling for tests.*—Random samples for tests shall be taken from each lot in accordance with table V.

4.2.2 *Overall inspection.*—Each of the samples selected in accordance with table IV shall be visually and dimensionally inspected to determine their compliance with dimensional and construction requirements specified in section 3. Defects shall be classified in ac-

TABLE IV.—*Sampling for inspection*

Number of smocks in lot	Number of smocks in inspection sample	Accept. Number total (defects)	Reject. Number total (defects)	Accept. Number major (defects)	Reject. Number major (defects)	Accept. Number major and minor A (defects)	Reject. Number major and minor A (defects)
300 and under	35	12	13	2	3	5	6
301 to 500	50	16	17	3	4	6	7
501 to 800	75	24	25	4	5	9	10
801 to 1300	110	33	34	6	7	12	13
1301 to 3200	150	43	44	8	9	17	18
3201 to 8000	225	62	63	11	12	24	25
8001 to 22,000	300	80	81	14	15	32	33
22,001 to 110,000	450	98	99	20	21	43	44
110,001 and over	750	98	99	31	32	68	69

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

TABLE V.—*Component sampling for tests*

Number of yards in lot	Sample size (Units of products)	Acceptance Number (defective)	Rejection Number (defective)
1300 and under	2	0	1
1301 to 3200	2	0	1
3201 to 8000	3	0	1
8001 to 22000	3	0	1
22,001 and over	5	0	1

cordance with paragraphs 4.3.2.2.3, 4.3.2.2.4, and 4.3.2.2.5. The maximum number of defects acceptable shall be as specified in table IV.

4.2.3 *Tests.*—Samples selected for tests in accordance with table V shall be tested in accordance with the applicable methods of Federal Specification CCC–T–191 as listed in table VI of this specification. The physical values specified in section 3 of this specification apply to the average of the determinations made on a unit of product for test purposes as specified in the applicable test methods. The unit of product shall be 3 linear yards.

4.2.4 *Compliance criteria.*

4.2.4.1 *Inspection.*—If the number of defects in the sample exceeds the acceptance number for that sample, the entire lot from which the sample was taken shall be considered to have failed to meet the requirements of this specification.

4.2.4.2 *Tests.*—Any sample unit (unit of product) for tests failing to conform to the requirements for which tests were made shall be considered defective. If the number of defective sample units exceeds the acceptance number for that sample size, the entire lot from which the sample was taken shall be considered to have failed to meet the requirements of this specification.

4.3 Military agencies.

4.3.1 *General.*—The quality assurance provisions contained in this section are applicable to inspection performed by and for the Government. Quality assurance provisions for components or materials described herein shall be in accordance with this specification and with subsidiary specifications referenced herein to the extent applicable, except that this specification shall govern in the event of conflict.

4.3.2 *Inspection for acceptance.* — Except when otherwise specified by Civil agencies inspection shall be in accordance with the provisions of Military Standard MIL–STD–105 except where otherwise indicated hereinafter. The inspection level shall be level II of table IIIA of Military Standard MIL–STD–105 and the acceptable quality levels shall be as follows:

For paragraphs 4.3.2.2.3 and 4.3.2.2.4

Major	2.5 DHU (defects per hundred units)
Major and Minor A	10.0 DHU
Total	25.0 DHU

For paragraph 4.3.2.2.5

Major	1.5 DHU
Total	4.0 DHU

4.3.2.1 *Inspection of components.*—Inspection shall be made on components in accordance with referenced specifications. Where specific characteristics are excepted herein as required in referenced specifications, this specification shall govern.

4.3.2.2 *Inspection of end item.*

4.3.2.2.1 *Examination of end item.* — Smocks selected for inspection in accordance with 4.2.2 shall be examined to determine their compliance with the requirements of this specification. Defects found during examination shall be classified in accordance with paragraphs 4.3.2.2.3, 4.3.2.2.4, and 4.3.2.2.5.

4.3.2.2.2 *Classification of defects.*—All defects shall be classified as indicated below

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

except those with an asterisk (*) in classification column. Those with an asterisk shall be classified as follows:

Major—when seriously affecting appearance or serviceability.

Minor A—when affecting appearance, but not seriously, or when slightly limiting serviceability.

4.3.2.2.3 *General defects:*

	Classification		
	Major	Minor	
		A	B
Material defects and damages:			
(*a*) Holes or seriously weakening defects such as smashes, floats, loose and weakening slubs, etc., expected to develop into a hole	X		
(*b*) Heavy shade bars, unsightly slubs, etc., affecting appearance on outside		X	
(*c*) Needle chews which may develop into a hole, large exposed drill holes, scissor cut, knife cut, tear, mend or burn	X		
(*d*) Mispicks, floats, wrong draw, dirty or oily yarns, dye streaks, etc. clearly noticeable		X	
(*e*) Not bleached, or color not as specified	X		
Note.—Slight defects of shade bars, slubs, etc., very small exposed drill holes, or needle holes (not chews) not expected to enlarge, weaken the fabric, or affect appearance or serviceability shall not be classified as defects.			
Shaded parts:			
(*a*) Any outside part noticeably shaded		X	
Cleanness:			
(*a*) Ink spots or stains of an obvious permanent nature:			
—affecting appearance	X		
—not visible when garment is worn			X
(*b*) Thread ends, not trimmed, shade tickets, loose thread and removable spots or stains not removed throughout garment			X
Components and assembly:			
(*a*) Any defect of component or assembly (not classified herein)	(*)		
(*b*) Any component part or required operation omitted (unless otherwise classified)	(*)		
Seams and stitching:			
(*a*) *General:*			
1. Seams twisted, puckered, or pleated affecting appearance (unless otherwise classified)		X	
2. Part of garment caught in an unrelated operation or stitching	(*)		
3. Thread breaks or ends of stitching (when not caught in other seams or stitching) not securely backstitched		X	
(*b*) *Gage of stitching* (raised, edge or double stitching):			
1. Irregular, i.e., unevenly gaged or various stitching not uniformly gaged, affecting appearance			X
2. Beyond range of width specified or varies more than 1/16 inch when no range is specified			X
3. Less than 1/16 inch from edge		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

4.3.2.2.3 *General defects:* (*continued*)

	Classification		
	Major	Minor	
		A	B
(*c*) *Open seams:*			
1. Pocket attachment to body:			
—more than ¼ inch	X		
—¼ inch or less		X	
2. On all other seams (except bottom hem):			
—more than ¾ inch	X		
—more than ¼ but not more than ¾ inch		X	
—¼ inch or less			X
3. On bottom hem:			
—more than ½ inch			X
Note.—One or more broken or two or more continuous skipped or run-off stitches on joining seams constitute an open seam. On double-stitched seams, a seam is considered open when either side is open.			
(*d*) *Raw edges:*			
1. On outside:			
—more than 1 inch	X		
—more than ½ but not more than 1 inch		X	
—¼ inch to ½ inch			X
2. On inside:			
—more than 2 inches		X	
—½ inch to 2 inches			X
Note.—Raw edges not securely caught in stitching shall be classified as an open seam.			
(*e*) *Runoffs* (*see open seams*).			
(*f*) *Seam and stitch type:*			
1. Wrong seam or stitch type		X	
2. Looper thread on outside (when stitch type 401 is used)	X		
(*g*) *Stitch tension:*			
1. Loose tension, resulting in a loose seam	X		
2. Loose tension on edge or raised stitching, resulting in loosely exposed bobbin thread or top thread		X	
3. Tight tension (stitches break when normal strain is applied to the seam and stitching)	X		
(*h*) *Stitches per inch:* (To be scored only when the condition exists on major portion of seam or row of stitching.)			
1. Less than minimum specified:			
—one stitch			X
—two stitches		X	
—three or more stitches	X		
2. Stitches in excess of maximum specified			X
Note.—Variation in the number of stitches per inch caused by the operator's speeding up the machine and pulling the fabric in order to sew over heavy seams, or in turning of corners shall be classified as follows:			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

4.3.2.2.3 *General defects:* (*continued*)

	Classification		
	Major	Minor	
		A	B
a. Within the major defect classification—no defect			
b. Within the major defect classification			X
(*i*) *Stitches skipped or broken:*			
1. On edge or raised stitching when seam is seamed, turned and stitched.			
—more than ½ inch		X	
—½ inch or less			X
Bartacks:			
(*a*) Missing, insecure or misplaced not serving intended purposes:			
—one or more		X	
4.3.2.2.4 *Defects applicable to specific parts.*			
Outside of smock.			
Type I:			
Collar:			
(*a*) *Construction and attachment:*			
1. Badly twisted	(*)		
2. Top collar or undercollar tight at joining seam to garment, causing excessive puckers or pleats on fronts or back	(*)		
3. Excessive fullness on undercollar or top collar		X	
4. Edge uneven or not properly forced out, definitely affecting appearance		X	
5. Less than 1⅝ or more than 1⅞ inches high		X	
6. Less than 19¾ or more than 20½ inches in circumference		X	
7. One or more tie tapes omitted or insecurely attached to garment	X		
Fronts:			
Type II:			
(*a*) *Front edge:*			
1. Fronts puckered or pleated in stitching back-edge of facing to fronts		X	
2. Fronts uneven in length by ¾ inch or more			X
3. Reinforcing (facing) omitted from edges of neck opening	X		
(*b*) *Shoulder and side seams:*			
1. Back lapped on fronts at shoulder or side seams			X
(*c*) *Breast pocket:*			
1. Out of horizontal alignment by:			
—three quarter inch but not more than 1 inch			X
—more than 1 inch		X	
2. Out of parallel alignment with front (vertical) edge by:			
—more than ⅜ but not more than ¾ inch			X
—more than ¾ inch		X	
3. Poorly shaped or set on crooked, definitely affecting appearance		X	
4. Excessive fullness or tightness at openings			X
5. Stitching omitted on creased edge			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

4.3.2.2.4 *Defects applicable to specific parts.* (*continued*)

	Classification		
	Major	Minor	
		A	B
6. Omitted	X		
7. Placed on right front	X		
8. Width:			
—less than 4¼ but not less than 4 inches or more than 4¾ but not more than 5 inches			X
—less than 4 or more than 5 inches		X	
9. Length:			
—less than 5¼ but not less than 5 inches or more than 5¾ but not more than 6 inches			X
—less than 5 or more than 6 inches		X	
10. Hem less than ½ inch wide			X
(*d*) *Tie-belt:*			
Type I:			
1. Not attached in center to front of smock	X		
2. Width less than 1¼ or more than 1½ inches		X	
3. Raw edges not turned under on ends		X	
4. Badly twisted affecting appearance		X	
5. Length less than 68 inches		X	
6. Attached less than 13½ or more than 14½ inches below the neck seam		X	
Type II:			
1. Out of alignment with the points where the front edges turn vertically downward by more than ¾ inch		X	
2. Material not double thickness		X	
3. Width less than 1½ or more than 1¾ inches			X
4. Stitched to outside of fronts		X	
5. Raw edge not turned under on free end		X	
6. Badly twisted affecting appearance		X	
7. Length of belts for size:			
—medium less than 29½ or more than 30½ inches		X	
—large less than 31½ or more than 32½ inches		X	
8. One or both omitted or insecurely tacked to front	X		
Note.—Belt is measured from point of attachment.			
(*e*) *Belt slits or openings:*			
Type II:			
1. Less than 5½ or more than 6½ inches below the base of the armholes		X	
2. Less than 3½ or more than 4½ inches (forward) from side seams			X
3. Reinforcement piece missing		X	
4. Less than 1¾ or more than 2¼ inches		X	
Sleeves:			
Type I:			
(*a*) *Setting of sleeves:*			
1. Seams visible from front of smock			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

4.3.2.2.4 *Defects applicable to specific parts.* (*continued*)

	Classification		
	Major	Minor	
		A	B
2. Sleeve made from more than two pieces of cloth	X		
3. Length (top) less than 15¾ or more than 16½ inches		X	
4. Fullness misplaced at armholes definitely affecting appearance	(*)		
5. Tight at armholes, causing pleats or excessive puckers on fronts or back	(*)		
6. Sleeve lapped on body at armhole seams	X		
7. Armholes badly stretched		X	
8. Armholes unevenly seamed definitely affecting appearance		X	
9. Sleeve back arm seam at unequal distance from shoulder seam by ¾ inch or more			X
Note.—Base of armhole must be in proper position when checking sleeves.			
(*b*) *Sleeve opening:*			
1. Hem badly twisted definitely affecting appearance			X
2. Omitted	X		
3. Uneven in length by more than ⅜ inch		X	
4. Circumference less than 17¾ or more than 18¼ inches			X
Type II:			
(*a*) *Setting of sleeves:*			
1. Sleeve made from more than one piece of cloth	X		
2. Length (top) for size:			
—medium—less than 15¼ or more than 16 inches		X	
—large—less than 16¼ or more than 17 inches		X	
Length (inseam) for size:			
—medium—less than 11¼ or more than 12 inches		X	
—large—less than 11¾ or more than 12½ inches		X	
3. Fullness misplaced at armholes definitely affecting appearance	(*)		
4. Tight at armholes, causing pleats or excessive puckers on front or back	(*)		
5. Sleeve lapped on body at armhole seams	X		
6. Armholes badly stretched		X	
7. Armholes unevenly seamed definitely affecting appearance		X	
8. Sleeve back arm seam at unequal distance from shoulder seam by ¾ inches or more			X
Note.—Base of armhole must be in proper position when checking sleeve.			
(*b*) *Sleeve opening:*			
1. Hem badly twisted definitely affecting appearance			X
2. Omitted	X		
3. Uneven in length by more than ⅜ inch		X	
4. Circumference for size:			
—medium—less than 14¼ or more than 14¾ inches		X	
—large—less than 15¼ or more than 15¾ inches		X	
Hanger:			
(*a*) Omitted		X	
(*b*) Ends not securely caught in collar stitching		X	
(*c*) Less than ¼ or more than ½ inch wide			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

4.3.2.2.4 *Defects applicable to specific parts.* (*continued*)

	Classification		
	Major	Minor	
		A	B
(*d*) Less than 2 or more than 2¾ inches long			X
(*e*) Off center with center back seam more than 1 inch			X
Bottom hem:			
(*a*) Twisted definitely affecting appearance			X
(*b*) Less than 1 inch (type I); less than ½ inch (type II)			X
(*c*) Stitching across end omitted or insecure		X	
(*d*) Bottom puckered or pleated on outside of frock in stitching of hem		X	
Labels:			
(*a*) *Size:*			
1. Missing, incorrect, or illegible	X		
2. Cloth label not caught in lower stitching of collar or not stitched on remaining three sides			X
3. Less than 1½ inches in length and width			X
4. More than 1¾ inches in length or width			X
(*b*) *Identification:*			
1. Missing, incorrect or illegible			X
2. Cloth label not stitched on four sides			X
3. Less than 2½ or more than 2¾ inches wide			X
4. Less than 2¾ or more than 3 inches in length			X
4.3.2.2.5 *Size measurements.*			
Breast, sleeve inseam, back length, circumference at bottom and of armhole:			
(*a*) Any measurement deviating from nominal dimension specified in table of measurements:			
—by more than twice the tolerance	X		
—by more than tolerance but not more than twice the tolerance		X	

4.3.3 *Inspection for chemical and physical tests.*—For each characteristic the acceptable quality level shall be 6.5 defects per hundred units, and the inspection level I, table IIIB of Military Standard MIL–STD–105. The lot size shall be expressed in units of one yard each.

4.3.3.1 *Testing of cloth component.*—The methods of testing specified in Federal Specification CCC–T–191, wherever applicable, and as listed in table VI herein shall be followed. The physical and chemical values specified in section 3 apply to the average of the determinations made on a unit of product for test purposes as specified in the applicable test method. The unit of product shall be three linear yards of cloth.

5. PREPARATION FOR DELIVERY

(For Civil agency procurements the definitions and applications of the various levels of packaging and packing shall be as specified in Federal Standard No. 102).

5.1 Packaging.

5.1.1 *Level A or B.*—Each smock (types I and II) shall be folded to measure approxi-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

TABLE VI.—*Test methods*

Component	Characteristic	Requirement reference	Test method
Cloth	Weave	Table I	Visual
	Ply	Table I	Visual
	Weight, ounces per square yard	Table I	5041
	Yarns per inch	Table I	5050
	Breaking strength	Table I	5100
	Colorfastness to:	3.1.2.2	
	Light[1]		5660
	Chlorine bleaching		5600
	Perspiration		5680
	Crocking		5650
	Laundering		5610
	Wet dry cleaning		5622
	Shrinkage in laundering	3.1.5	5550
	Nonfibrous materials	3.1.4	2611
	Seam efficiency	3.1.8	5110[2]

[1] Sample exposed for 40 standard fading hours.
[2] Needle and thread size shall be as follows: Needle size—0.049 inch plus or minus 0.001 inch across the blade, round point. Thread size —top 24/3—looper 60/3.

mately 28½ by 14½ inches. Ten folded smocks of one type and size only shall be evenly stacked in a bundle (with collars of type I alternated at opposite ends), and then wrapped in 50-pound kraft paper conforming to grade B of Federal Specification UU–P–268. The kraft paper wrap shall be secured by tying with cotton tape or twine, or sealed with gummed-paper tape of not less than 2 inches in width, conforming to class 2 of Federal Specification UU–T–111.

5.1.2 *Level C.*—Type I and type II smocks shall be packaged in accordance with the manufacturer's commercial practice.

5.2 Levels of packing.

5.2.1 *Level A.*—Four unit packages of 10 smocks each, of one size and type only, packaged as specified in 5.1.1, shall be packed in bales conforming to Military Specification MIL–B–3149.

5.2.2 *Level B.*—Four unit packages of 10 smocks each of one size and type only, packaged as specified in 5.1.1, shall be packed as specified in 5.2.1, except that waterproof barrier-material shall not be required.

5.2.3 *Level C.*—Smocks, packaged as specified in 5.1.2, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Shipping containers shall conform to carrier rules and regulations applicable to the mode of transportation.

5.3 Marking.

5.3.1 *Civil agencies.*—In addition to any special marking specified in the contract or order, each unit package and shipping container shall be marked in accordance with Federal Standard No. 123.

5.3.2 *Military agencies.*—In addition to any special marking specified in the contract or order, marking shall be in accordance with Military Standard MIL–STD–129.

6. NOTES

6.1 Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

(*a*) Type (1.2.1).
(*b*) Class of cloth (1.2.2).
(*c*) Color (3.1.3).
(*d*) Size (table II).
(*e*) When a guide sample is required (3.4).
(*f*) When a preproduction sample is required (3.5).
(*g*) Sampling plan (4.2).
(*h*) The level of packaging and packing (5.1, 5.2).
(*i*) Marking (5.3).
(*j*) When seam efficiency is not required (3.1.9).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

6.2 In the preparation of contracts or orders by Civilian agencies, it should be noted that marking for unit or intermediate containers should be specified where standard commercial marking is not considered adequate; also where shipping containers require special marking, such marking should be indicated. (See Federal Standard No. 123.)

6.3 This specification covers the following item appearing in the Armed Services Medical Stock List:

8405–717–2325 SMOCK, MAN'S

6.4 Guide samples. — For access to guide sample, address the procuring office issuing the invitation for bids.

6.5 Transportation description and minimum weight applicable to this commodity are:

Rail:

Clothing, not otherwise indexed by name.
Carload minimum weight 15,000 pounds, subject to Rule 34, Uniform Freight Classification.

Motor:

Clothing, not otherwise indexed, other than in wheeled containers or on hangers or racks.
Truckload minimum weight 12,000 pounds, subject to Rule 34, National Motor Freight Classification.

Notice. — When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded, by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MILITARY INTEREST:
Army—M
Navy—Md.
Air Force—AMC.



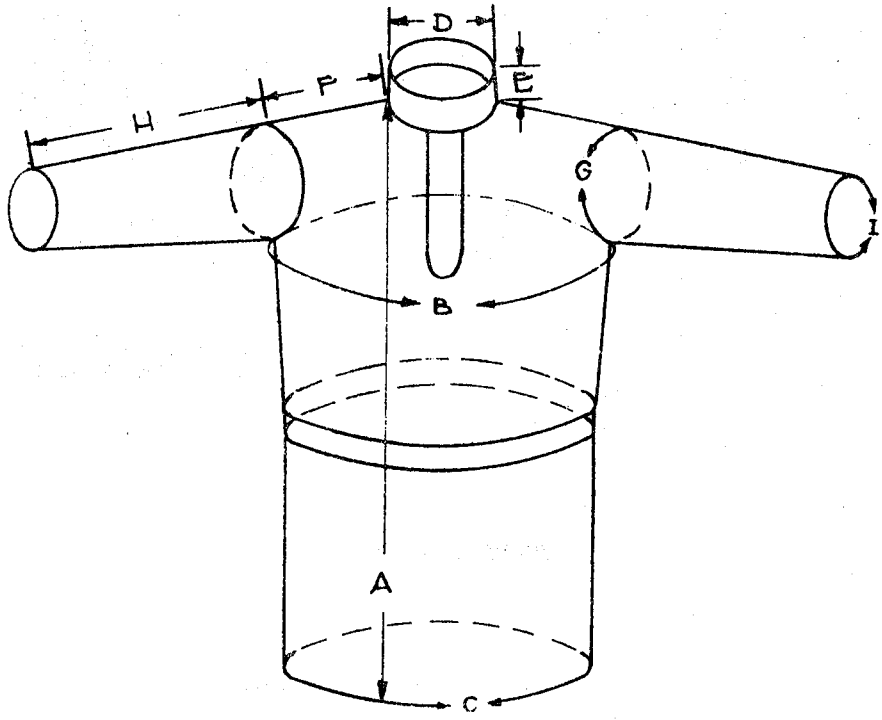


FIGURE 1.—Type I.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

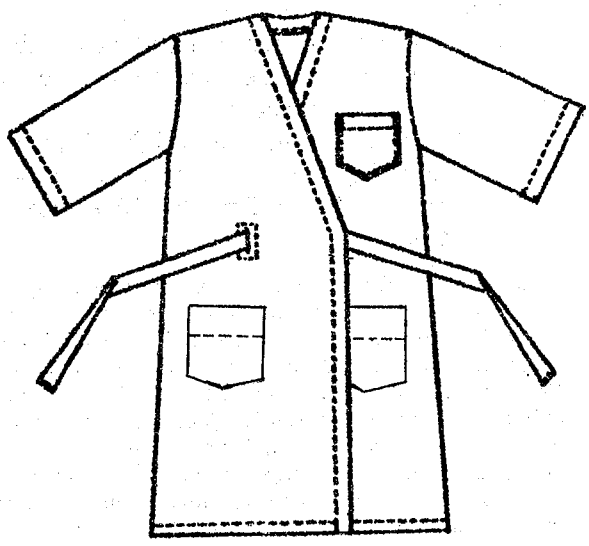

FRONT

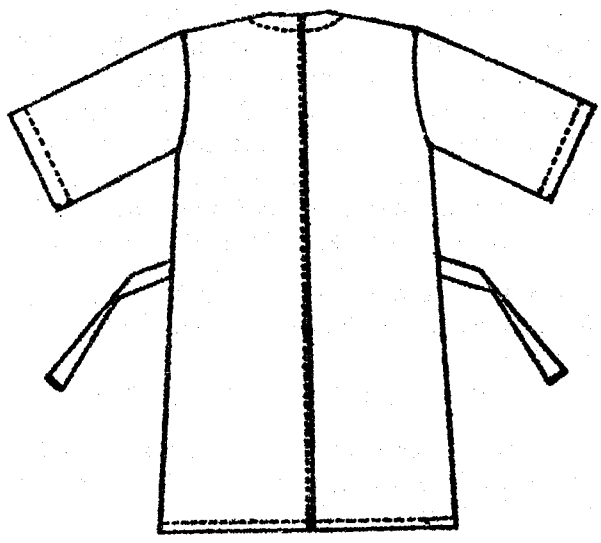

BACK

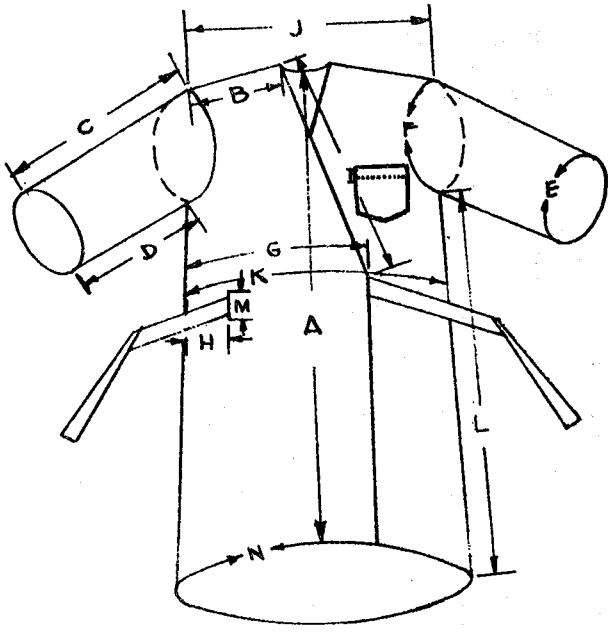

Front - (measurements)



DETAIL: NECK, POCKET, BELT CONSTRUCTION

FIGURE 2.—Type II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.