DDD-S-496e
October 2, 1967
SUPERSEDING
Int. Fed. Spec. DDD-S-00496d (DM)
October 5, 1964
Fed. Spec. DDD-S-496c
November 24, 1958
MIL-S-3969B
October 20, 1961

FEDERAL SPECIFICATION

SMOCKS, MEN'S: DENTAL OPERATING AND MEDICAL ASSISTANT

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers requirements for a dental operating smock and a medical assistant's smock, both made of bleached white duck (see 6.1).

1.2 Classification. The smocks shall be of the following types and sizes as specified (see 6.2).

Type I - Dental operating.

Schedule of sizes

Small
Medium
Large

Type II - Medical assistant.

Schedule of sizes

Small	Medium	Large
Short	Short	Short
Regular	Regular	Regular
Long	Long	Long

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The following specifications and standards, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

V-T-276 - Thread, Cotton.
V-T-280 - Thread, Cotton Gimp, Buttonhole.
UU-P-268 - Paper, Kraft, Untreated, Wrapping.
CCC-C-442 - Cloth, Duck, Cotton, Bleached.
CCC-C-444 - Cloth, Cotton. Jean, (Bleached).
CCC-T-191 - Textile Test Methods.
DDD-L-20 - Label; For Clothing, Equipage, and Tentage, (General Use).
PPP-B-636 - Box, Fiberboard.

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).
Fed. Std. No. 751 - Stitches, Seams, and Stitchings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards and Handbooks as outlined under General Information to the Index of Federal Specifications and Standards and at the price indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, Seattle, and Washingtin, D. C.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply:

Rules and Regulations under the Textile Fiber Products Identification Act.

(Copies may be obtained free of charge from the Federal Trade Commission, Washington, D. C. 20580.)

3. REQUIREMENTS

3.1 Samples. Guide samples, when furnished, are solely for guidance and information to the supplier(see 6.3). Variations from the specification may appear in the sample, in which case the specification shall govern.

3.2 Preproduction sample. When specified (see 6.2), a preproduction sample of the smock shall be made ready for the contracting officer or his authorized representative for inspection in accordance with 4.2. Approval of the sample authorizes commencement of production but does not relieve the supplier of the responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.3 Material.

3.3.1 Basic material. The basic material shall be cotton duck conforming to type V of CCC-C-442, except that the shrinkage shall not exceed 1 percent.

3.3.1.1 Optional basic material. When specified (see 6.2), for civil agencies only, cotton jean conforming to CCC-C-444 may be used as an optional basic material.

3.3.2 Thread. The thread for seaming and stitching shall be White, Shade AH, Cable No. 66050, cotton thread conforming to IA2, ticket Nos. 30 and 50, 3 ply of V-T-276.

3.3.3 Gimp. The gimp for buttonhole reinforcement shall be White, Shade AH, Cable No. 66050, size No. 8, conforming to type I or II of V-T-280.

3.3.4 Buttons. Knotted buttons shall be of white braided cotton made into tubular tape on a 28 or 32 carrier machine from 2 ply, 2 cord, No. 20 ticket bleached cotton yarn, with not less than 3 ends per carrier and not less than 18 picks per inch. The 5/16-inch tape shall weigh 30 ± 1 ounce per gross yards and have a miniumu breaking strength of 125 pounds when tested as specified in 4.3. The button shall be formed by interlacing the braided tape, forming a knotted ball 5/8 ± 1/8 inch in diameter. The tape shall be of sufficient length to allow the two free ends to protrude not less than 1-1/4 inches from the knotted ball.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

3.3.5 Label. Each smock shall have a combination size and identification label conforming to type I, classes 1 and 2 of DDD-L-20. The label shall include the information required by the applicable products labeling act and the supplier's registration number. Smocks procured by civil agencies shall be labeled, ticketed or invoiced for fiber content in accordance with the Rules and Regulations under the Textile Fiber Products Identification Act (see 2.2). The labels shall meet the fastness to laundering requirements of DDD-L-20. The item identification for type I shall be "Smock, Man's, Dental Operation" and for type II shall be "Smock, Man's, Medical Assistant". The size shall be expressed adjectively.

3.4 Design. The smocks have a side and shoulder opening on the right side, a standing collar with a V-shape cut-out at the center front, elbow length sleeves, a right breast pocket with two pencil compartments and a one-piece back with pinch pleats and a set-on belt. The smocks are closed with knotted buttons running from the collar along the right shoulder down the right side. The type I smock is knee-length and has an optional two-piece sleeve (see figure1), and the type II smock is jacket length (see figure 2).

3.4.1 Figures. Figures are furnished for information only. In the event of any inconsistencies between the figure and the specification, the specification shall govern.

3.5 Patterns.

3.5.1 Type I smock. The patterns shall be processed by the supplier. The finished measurements shall be in accordance with table III.

3.5.2 Type II smock. Standard patterns for use in cutting working patterns will be furnished by the Government. The working patterns shall be identical to the Government patterns which show size, directional lines and notches for correct assembly and shall not be altered in any way. The patterns provide a 1/2 inch seam allowance for double-lapped, double-stitched seams, and 3/8 inch for all other seams, unless otherwise indicated in table II.

3.5.2.1 List of pattern parts. The components of the smock shall be cut from material as specified, in accordance with the pattern parts required, as shown in table I.

Table I. List of pattern parts

Material	Nomenclature of pattern parts	Cut parts
White cotton duck or White cotton jean (see 6.2)	Front	1
	Right side front panel	1
	Back	1
	Sleeve	2
	Pencil pocket	1
	Breast pocket	1
	One-half belt	1
	Collar	3 1/
	Left facing	1

1/ One ply of collar is used as a collar interlining.

3.6 Construction.

3.6.1 Stitches, seams, and stitching. Stitch, seam, and stitching types specified in table II shall conform to Fed. Std. No. 751. Whenever two or more types of seams or stitches are given for the same part of the operation, any one of them may be used. Where stitch type 401 is used, the underthread (looper) shall be on the inside of the garment. The double-needle stitching shall be 3/16 to 5/16 inch gage with the outer row of stitching 1/16 inch from edge on outside of smock. Seam allowances shall be maintained with seams properly sewn so that no raw edges, run-offs, twists, pleats or puckers shall result.

3.6.2 Thread breaks and ends of seams. Ends of all seams and stitchings, when not caught in other seams or stitching shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks (401 stitch type) may be repaired using 301 stitch type.

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

3.6.4 Buttonholes. Buttonholes shall be 7/8 to 1 inch cut length, to fit easily over a 5/8-inch knotted button, eyelet-end, taper-bar type, or eyelet-end, square-bar type, worked over gimp, with the ends tacked or bar-tacked. Purling shall be on the outside of the smock.

3.7 Manufacturing operations requirements. The smocks shall be manufactured in accordance with operation requirements specified in table II. The supplier is not required to follow the exact sequence of operations. Any basting or holding stitching to facilitate manufacture is permissible provided that the thread is removed or does not show on the fininshed garment.

3.7.1 Marking. The component parts of the smock shall be marked to insure a uniform shade and size throughout the garment. Any method of marking may be used except:

(1) Metal fastening devices.
(2) Sew-on shade tickets.
(3) Adhesive type tickets which leave traces of paper or adhesive on material upon removal of tickets.

Table II. Manufacturing operations requirements

Manufacturing operations requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread	
				Needle	Bobbin or looper
1. Cutting.					
a. Cut smock in strict accordance with patterns furnished which show size, directional lines, placement of pockets and notches for proper assembly. Directional lines shall be in the warp direction.					
b. Cut all parts out of one piece of material except the pencil pocket, inner ply of collar, collar interlining, facing and hanger, which may be cut from ends.					
c. Cut stripping for hanger of sufficient width to comply with operation 4.a, b or c.					
Note: Cut width of stripping will vary depending on which method of operation 4 is used.					
2. Replacement of damaged parts.					
a. Replace, at time of cutting, any part containing a hole, smash, multiple float or large loose slub.					
b. Replace any part damaged during manufacturing process by needle chew, cut, tear, hole, burn or large exposed drill hole. (Unit containing a visible mend will not be acceptable).					
3. Marking (see 3.7.1).					
a. Ticket, mark or bundle all parts to insure a uniform shade and proper assembly throughout the smock.					
4. Make hanger.					
Finished appearance. The hanger loop on the finished smock shall measure 3/8 to 1/2 inch wide and 2 to 2-1/2 inches long.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

Table II. Manufacturing operations requirements (cont'd)

Manufacturing operations requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread	
				Needle	Bobbin or looper
4. Make hanger (cont'd).					
a. Fold stripping to center with edges abutted and stitch 3/16 to 1/4 inch gage, with the covering stitching on the underside.	406	EFh-1	10-14	30-3	50-3
or					
b. Fold stripping with both edges turned in, and with turned edges abutted, stitch 3/16 to 1/4 inch gage with the covering stitch on the underside.	104	EFae-1	10-14	30-3	
c. Fold stripping in half, and with raw edges turned in, stitch 1/16 inch from both edges.	301	EFp-2	10-14	30-3	30-3
5. Hem pencil pocket.					
Turn top edge of pencil pocket to inside and stitch 1/16 to 1/8 inch from edge, forming a hem 3/8 ± 1/8 inch wide.	301	EFa-1	10-14	30-3	30-3
6. Make breast pocket.					
a. Turn top of pocket forming a welt on the outside. Turn in raw edge and stitch to pocket forming a hem 1-1/4 ± 1/8 inch wide.	301	EFb-1	10-14	30-3	30-3
b. Stitch along top folded edge.	301	OSf-1	10-14	30-3	30-3
7. Make collar.					
a. Seam the three plies of collar together along the top and across the ends.	301 or 401	SSe-2(a) SSe-2(a)	10-14 10-14	30-3 30-3	30-3 50-3
b. Turn collar, slash at point of "V", work out edges and points and edge stitch 3/16 to 1/4 inch from edge, ending stitching above bottom edge of collar at both ends to allow joining of collar to smock (oper. 17).	301	SSe-2(b)	10-14	30-3	30-3
Note: Edge stitching of entire collar may be performed after collar setting (oper. 17).					
8. Make sleeve (optional two-piece) type I (see figure 1).					
Join back arm sleeve seam with a double-lapped, double-stitched seam, with the front sleeve over the back sleeve.	301	LSc-2	10-14	30-3	30-3
9. Hem sleeve cuffs.					
Turn up bottom of sleeve to the outside, turn in raw edge, and stitch through sleeve 3/16 to 1/4 inch from edge, forming a hem 1-1/2 ± 1/4 inch wide.	301	EFb-1	10-14	30-3	30-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

Table II. Manufacturing operations requirements (cont'd)

Manufacturing operations requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread	
				Needle	Bobbin or looper
10. Hem right front panel.					
Hem front edge of right front panel with raw edge turned in, and stitch 1/16 to 1/8 inch from edge. Hem shall finish from 1/4 to 3/8 inch wide.	301	EFb-1	10-14	30-3	30-3
11. Stitch front dart.					
Finished appearance. The dart shall be in alignment with the base of collar at the V-opening.					
a. Fold and stitch dart, turn toward the right on inside of smock and raise stitch on front 1/16 to 1/8 inch from edge, tapering to nothing at bottom.	301 301	OSf-1 and OSe-1	10-14 10-14	30-3 30-3	30-3 30-3
12. Sew on front facing.					
a. Seam facing to front, along shoulder, armhole and front, turn, work out edges and points, and stitch 3/16 to 1/4 inch from edge.	301 or 401 and 301	SSe-2(a) SSe-2(a) SSe-2(b)	10-14 10-14 10-14	30-3 30-3 30-3	30-3 50-3 30-3
b. Turn under raw edge at back of facing and stitch 1/16 to 1/8 inch from edge.	301	LSd-1	10-14	30-3	30-3
13. Sew on pencil pocket.					
a. Position pencil pocket on front as indicated by marks on pattern, turn under raw edges at sides and stitch sides and bottom 1/16 to 1/8 inch from edge. Finished pocket shall measure 2 inches wide and 4-1/2 inches deep (± 1/4 inch on both measurements).	301 301	LSd-1 and LSbj-1	10-14 10-14	30-3 30-3	30-3 30-3
b. Form two compartments in the pencil pocket by stitching throughout the center of the pocket and smock, (1/8 inch off-center tolerance).	301	SSv-1	10-14	30-3	30-3
14. Sew on breast pocket.					
a. Position breast pocket over pencil pocket on front as indicated by marks on pattern, turn under raw edges at sides and bottom and seam to front of smock 1/16 to 1/8 inch from edge. Finished pocket shall measure 5 inches wide and 5-1/2 inches deep (± 1/4 inch on both measurements).	301	LSd-1	10-14	30-3	30-3
b. Continue stitching across top of pocket, with stitching superimposed on stitching at top of pocket hem, closing top opening to the edge (1/4 inch tolerance) of the pencil pocket opening. The top portion of breast pocket which covers the pencil pocket shall remain open.	301		10-14	30-3	30-3
15. Sew on belt.					
Finished appearance. Half belt on back of smock shall be over a pinch pleat on each side back. Each pleat shall be equidistant from and turned toward its respective side seam. The finished belt shall measure 2 ± 1/4 inch wide.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

Table II. Manufacturing operations requirements (cont'd)

Manufacturing operations requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread	
				Needle	Bobbin or looper
15. Sew on belt (cont'd)					
a. With belt positioned on back of smock and pinch pleats formed as indicated on pattern, turn top and bottom edges of belt and seam to smock with stitching 3/16 to 1/4 inch from each edge.	301	LSd-1 each edge	10-14	30-3	30-3
	or 401	LSd-1 each edge	10-14	30-3	50-3
16. Join shoulder seams.					
With back lapped on fronts, join shoulders with double-lapped, double-stitched seams.	301 or	LSc-2	10-14	30-3	30-3
	401	LSc-2	10-14	30-3	50-3
17. Sew on collar.					
a. Seam the inner ply of collar to the inside of neck with the interlining caught in the stitching and with the ends of the hanger loop caught in the stitching at the center back (1/4 inch off center tolerance).	301 or	SSa-1	10-14	30-3	30-3
	401	SSa-1	10-14	30-3	50-3
b. Turn in raw edge of outer ply of collar and seam to neck of smock 1/16 to 1/8 inch from edge, catching edge of undercollar in seam, with stitching continued to meet edge stitching at ends (see oper. 7). Finished collar shall stand 1-1/2 ± 1/4 inch high.	301		10-14	30-3	30-3
	and 301	SSe-2(b)	10-14	30-3	30-3
Note: If edge stitching was not performed in operation 7b., continue edge stitching around collar.					
18. Set sleeves.					
Set sleeves matching notches and seam with double-lapped, double-stitched seams, with the smock lapped over the sleeve.	301 or	LSc-2	10-14	30-3	30-3
	401	LSc-2	10-14	30-3	50-3
19. Join side and sleeve seams.					
a. Join the side seams and sleeve seams in a continuous operation with double-lapped, double-stitched seams with the fronts lapped on the back. The sleeve setting seam at armpit shall not be staggered more than 1/2 inch measured from center of seam to center of seam. The ends of the belt shall be caught in the seaming.	301 or	LSc-2	10-14	30-3	30-3
	401	LSc-2	10-14	30-3	50-3
20. Bartack sleeves.					
The end of each sleeve joining seam shall be tacked with a horizontal bartack across both lines of stitching 1/2 ± 1/8 inch long.	Bartack		28 per bartack	30-3	30-3
21. Hem bottom.					
Turn up bottom of smock as indicated by marks on pattern, turn in the raw edge and stitch 1/16 to 1/8 inch from edge. Hem shall finish 1-1/4 ± 1/4 inch wide.	301	EFb-1	10-14	30-3	30-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

Table II. Manufacturing operations requirements (cont'd)

Manufacturing operations requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread	
				Needle	Bobbin or looper
22. Make buttonholes.					
Mark, gage and make taper-bar or square-bar type buttonholes located as follows in accordance with marks on patterns with inside edge of eyelet 1/2 ± 1/8 inch from edge.	Buttonhole		52-54 per buttonhole including tack	30-3	30-3
One buttonhole in center of collar at the left end. Three vertical buttonholes on front facing adjacent to finished shoulder. One horizontal buttonhole on the front at armhole. Two horizontal buttonholes on the front at edge of side opening.	Buttonhole and Bartack		or 44-46 per buttonhole 21 per bartack	30-3	30-3
23. Mark for buttons.					
Mark smock for buttons in locations to correspond with buttonholes. The position of the buttons shall be as follows:					
1 button centered on width of collar 1/2 ± 1/8 inch forward from the front edge of shoulder seam. The 6 remaining buttons positioned 1/2 ± 1/8 inch from the seam edge.					
24. Tack on buttons.					
Superimpose ends of button braid and position on marks with button part away from the edge. Bartack ends of braid to smock at button marker, across the width of the braid, 1/4 to 3/8 inch from raw end of braid. Turn button back with the braid covering the raw end and bartack again to the smock, across the width of the braid, catching the underplies of the braid in the bartack. The finished button shank shall measure 1/4 to 1/2 inch in length from the bottom of the button to bartack of braid.	Bartack		28 per bartack	30-3	30-3
25. Clean smock.					
Trim off all thread ends, remove all loose threads, spots, stains and shade markings.					
26. Press smock.					
Press smock with a heated iron or machine.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

3.8 Sizes and measurements. Unless otherwise specified, the sizes and measurements of the finished smocks shall be in accordance with table III.

Table III. Table of measurements (inches)

Size	1/2 Chest 1/	1/2 Sweep 2/	Front length 3/	Back length 4/	Back to sleeve		Collar 7/	1/2 Bottom of sleeve 8/
					Belt 5/	Inseam 6/		
Type I								
Small	21	25-1/2	37-1/2	40-3/4	16	8	15-1/2	8-1/8
Medium	23	27-1/2	38	41-1/4	16-1/2	8	16-1/2	8-1/2
Large	25	29-1/2	38-1/2	41-3/4	17	8	17-1/2	8-7/8
Type II								
Short	20-3/4	22-1/2	25-1/4	28-3/4	15-3/4	8-1/4	16	8-5/8
Regular	20-3/4	22-1/2	26-1/4	30	16-1/2	8-3/4	16	8-5/8
Long	20-3/4	22-1/2	27-3/4	31-1/4	17-1/4	9-1/4	16	8-5/8
Medium								
Short	23-1/4	25	25-3/4	29-1/4	16-1/4	8-1/4	17	8-7/8
Regular	23-1/4	25	27	30-1/2	17	8-3/4	17	8-7/8
Long	23-1/4	25	28-1/4	31-3/4	17-3/4	9-1/4	17	8-7/8
Large								
Short	25-3/4	27-1/2	26	29-3/4	16-3/4	8-1/4	18	9-1/4
Regular	25-3/4	27-1/2	27-1/2	31	17-1/2	8-3/4	18	9-1/4
Long	25-3/4	27-1/2	28-3/4	32-1/4	18-1/4	9-1/4	18	9-1/4
Tolerance (±)	1/2	1/2	1/2	1/2	1/2	3/8	1/2	1/8

1/ Taken from folded edge to folded edge across front, at base of armhole.
2/ Taken along bottom edge of coat from folded edge to folded edge.
3/ Taken from collar joining seam at center front, to bottom of coat.
4/ Taken from collar joining seam at center back to bottom of coat.
5/ Taken from collar joining seam at center back, to top of belt.
6/ Taken along inseam from armhole to bottom of sleeve.
7/ Taken from edge to edge at joining seam, with collar laid flat.
8/ Taken across bottom of sleeve, from fold to fold with sleeve laid flat.

3.9 Workmanship. The finished smocks shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspection set forth in the specification where such inspections are deemed necessary to assure that supplies and service conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

4.2 Preproduction sample inspection. The preproduction sample, when submitted in accordance with 3.2, shall be inspected as specified in 4.3.2.2 thru 4.3.2.4 for compliance with design, workmanship and dimensional requirements.

4.3 Inspection for acceptance. Inspection shall be conducted in accordance with MIL-STD-105 unless otherwise indicated herein.

4.3.1 Component and material inspection. In accordance with 4.1 components and material shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase documents. In addition to testing provisions contained in subsidiary specifications, testing shall be performed on component listed in table IV for characteristics noted. Wherever applicable, tests shall be conducted in accordance with methods prescribed in CCC-T-191. When the data in "determinations per sample unit" and "results reported as" columns are not specified in the table, they shall be as required by the referenced test method. All test reports shall be as required by the values used in expressing the final results.

4.3.1.1 Sampling for testing. Unless otherwise specified in subsidiary specifications, testing shall be in accordance with the following table. The lot shall be unacceptable if one or more sample units fail to meet any test requirements specified. The sample unit for testing the buttons (see 3.3.4) shall be 15 buttons and the lot size shall be expressed as "each".

Lot size	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

Table IV. Test methods

Component	Characteristic	Requirement paragraph	Test method	Determinations per sample unit	Results reported as
Buttons (knotted)	No. of carriers	3.3.4	Count	1	To nearest whole number
	Ends per carrier	3.3.4	Count	1	To nearest whole number
	Picks per inch	3.3.4	5050	— —	— — — —
	Breaking strength	3.3.4	5100	— —	— — — —
	Weight (ounces) per gross yards	3.3.4	5040	— —	— — — —

4.3.2 Examination of the end item.

4.3.2.1 Classification of defects. The defects found during examination shall be as classified in accordance with 4.3.2.2 through 4.3.2.4.

4.3.2.2 General defects.

Defects	Classification		
	Major	Minor	
		A	B
Material defects and workmanship damages			
a. Any weakening defect such as a smash, multiple float or large, loose slub.	X		
b. Unsightly slub.		X	
c. Hole, cut, tear, visible mend, burn or needle chew.	X		
d. Large exposed drill hole.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

Defects	Classification		
	Major	Minor A	Minor B
Material defects and workmanship damages (cont'd)			
Note: Material defects and workmanship damages are to be classified as indicated above only when the condition is one which definitely weakens the fabric or when it is so conspicuously located as to be clearly noticeable. Non-weakening conditions which are inconspicuous shall not be classified as defects.			
Shaded parts			
a. Badly shaded parts (except parts permitted to be cut from ends).		X	
b. Parts permitted to be cut from ends badly shaded.			X
Cleanness			
a. Spot or stain on outside.		X	
b. Thread ends not trimmed, or loose threads or one or more shade tickets not removed.			X
c. Shade stamp marking exposed on outside.			X
d. Any visible basting stitches.			X
Components and assembly			
Any component part or assembly omitted (unless otherwise classified herein).	X		
Cutting			
Any component part not cut in accordance with specification requirements.	X		
Seams and stitching			
a. Accuracy of seaming:			
1. Seam twisted, puckered or pleated.	X		
2. Part of garment caught in any unrelated operation or stitching.	X		
3. Ends of seams produced with 301 stitching type, when not caught in other seams or stitching, backtacked less than 1/4 inch.		X	
4. Ends of a continuous line of stitching overlapped less than 1/2 inch.		X	
5. Thread breaks stitched less than 1/2 inch beyond each end of break.		X	
b. Gage of stitching:			
1. Irregular, i.e., unevenly gaged or corresponding stitching not uniformly gaged.		X	
2. Not within range of gage specified or varies more than 1/16 inch when no range is specified.		X	
c. Open seams:			
1. On collar edges or seams joining collar to smock:			
- up to 1/4 inch, inclusive.		X	
- more than 1/4 inch.	X		
2. On all other seams; except hems:			
- up to 1 inch, inclusive.		X	
- more than 1 inch.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

Defects	Classification		
	Major	Minor	
		A	B
Seams and stitching (cont'd)			
3. On hems:			
- up to 1 inch, inclusive.			X
- more than 1 inch.		X	
d. Raw edges (applicable when edges are required to be turned under and stitched):			
1. On outside seams:			
- 1/4 inch to 3/4 inch, inclusive.			X
- more than 3/4 inch.		X	
2. On inside:			
- more than 1 inch.		X	
e. Run-offs:			
1. On joining seams, when resulting in an open seam use "open seam" classification.			
2. On edge or raised stitching:			
- 1/4 inch to 1/2 inch, inclusive.			X
- more than 1/2 inch.		X	
f. Seam and stitch type:			
1. Not as specified.		X	
2. Looper thread exposed on outside of smock when 401 stitch type is used.	X		
g. Stitch tension (except bartack):			
1. Loose tension resulting in a loose seam.	X		
2. Loose tension on raised or edge stitching resulting in a loosely exposed lower or top thread.		X	
3. Tight tension (stitches break when normal strain is applied to seam or stitching).	X		
h. Loose tension on one or more bartacks.			X
i. Stitches per inch (to be scored only when condition exists on major portion of seam or stitching):			
1. Less than minimum specified by:			
- one or two stitches.			X
- three or more stitches.	X		
j. Stitches skipped or broken on edge or raised stitching:			
- up to 1/2 inch, inclusive.			X
- more than 1/2 inch.		X	
Buttonholes			
a. One or more omitted or added.	X		
b. Stitching on one or more buttonholes not caught in fabric causing stitching to pull away from fabric.	X		
c. Not corresponding to size of buttons so that they do not button properly.	X		
d. One or more broken or more than two skipped stitches in one or more buttonholes.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

Defects	Classification		
	Major	Minor	
		A	B
Buttonholes (cont'd)			
e. Ends not securely tacked in:			
- one or two buttonholes.		X	
- three or more buttonholes.	X		
f. Bartack omitted, loose or misplaced in:			
- one or two buttonholes.		X	
- three or more buttonholes.	X		
g. Gimp omitted on one or more buttonholes.			X
h. Finished with purling on inside.		X	
i. Ragged edges.			X
j. Uncut or not specified type.		X	
Buttons			
a. Missing, insecure or defective:			
- one button.			X
- two or more buttons.		X	
b. Not attached as specified.		X	
c. Shank, including tacked portion, less than 1/4 inch or more than 1/2 inch long.		X	
d. Attached with less than two bartacks.		X	
e. Raw edge not covered in second bartacking.		X	
f. Bartacking not extending across the width of braid.		X	
Pressing			
a. Burned or scorched.	X		
b. Omitted, or poorly pressed.		X	

4.3.2.3 Detailed defects applicable to a specific part of smock.

Defects	Classification		
	Major	Minor	
		A	B
Collar (construction and placement)			
a. Interlining omitted.	X		
b. Badly twisted.	X		
c. End (s) of collar extending more than 1/8 inch from edge (s) of smock.			X
d. Ends uneven in width by more than 1/4 inch.		X	
e. Puckered or pleated at neck joining seam.	X		
f. Finishing less than 1-1/4 inches or more than 1-3/4 inches high.		X	
g. Poorly shaped.	X		
h. Base of V-opening bulky.		X	
i. Slash at base of V-opening exposed on outside.	X		
j. Base of V-opening out of alignment with front dart by more than 1/4 inch.		X	
k. Edges not properly forced out.			X
l. Interlining not caught in neck joining seam.		X	
m. Excess fullness on top collar.		X	
n. Buttonhole (position):			
- more than 1/4 inch off-center (width) of left end.		X	
- eyelet less than 3/8 inch or more than 5/8 inch from end.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

Defects	Classification		
	Major	Minor A	Minor B
Collar (construction and placement) (cont'd)			
o. Button misplaced causing top edges of collar to finish unevenly by 1/4 inch or more when buttoned.		X	
Front			
a. Front dart:			
1. End not tapered, causing bulge.			X
2. Folded toward left on inside of smock.		X	
b. Breast pocket:			
1. Omitted or placed on left side.	X		
2. Poorly shaped or set on crookedly.		X	
3. Less than 4-3/4 inches wide or less than 5-1/4 inches deep.	X		
4. More than 5-1/4 inches wide or more than 5-3/4 inches deep.			X
5. Hem less than 1-1/8 inches or more than 1-3/8			X
6. Not stitched along top folded edge.			
7. Stitching across top of pocket ending more than 1/4 inch before or beyond pencil pocket opening.			X
c. Pencil pocket:			
1. Edge of pencil pocket exposed beyond top edge of breast pocket.		X	
2. Hem less than 1/4 inch or more than 1/2 inch wide.			X
3. Less than 1-3/4 inches or more than 2-1/4 inch wide.			X
4. Less than 4 inches or more than 4-3/4 inches deep.			X
5. Stitching forming compartment more than 1/8 inch off center of pencil pocket.			X
d. Side opening:			
1. Facing short, tight or twisted, causing fullness or twist on outside of front.		X	
2. Edge of opening poorly shaped or not matching shoulder seam and contour of armhole.		X	
3. Edges not forced out.			X
4. Buttons and buttonholes out of alignment, causing bulge or twist when buttoned.	X		
5. Buttonholes at shoulder unevenly spaced by 1/4 inch or more.		X	
6. Inside edge of buttonhole eyelet less than 3/8 or more than 5/8 inch from edge.			X
e. Panel:			
1. Hem less than 1/4 inch or more than 3/8 inch wide.			X
2. Hem edge irregular in width or twisted.		X	
3. Bottom of panel not even with front by more than 1/2 inch when buttoned.		X	
Sleeves			
a. Tight, causing puckers or pleats on body parts.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

Defects	Classification		
	Major	Minor	
		A	B
Sleeves (cont'd)			
b. Puckered or pleated at armhole joining seam.		X	
c. Ends of armhole seams, at armpit, staggered more than 1/2 inch from center of seam to center of seam.		X	
d. Finished width of cuff less than 1-1/4 inches or more than 1-3/4 inches.		X	
e. Cuff twisted.		X	
f. Cuff irregular in width.		X	
g. Right and left cuff uneven in width by more than 1/4 inch.			X
h. Bartack less than 3/8 inch or more than 5/8 inch long.			X
i. Bartack not across both rows of inseam stitching at bottom of sleeve.	X		
Direction of seams			
a. Front(s) lapped over back at shoulder seam(s).		X	
b. Back lapped over front(s) at side seam(s).		X	
c. Sleeve finishing on top of body at armhole joining seam.		X	
d. Back sleeve over front sleeve (when optional 2-piece sleeve is used).		X	
Back			
a. Pleats:			
1. Not equidistant from side seams by more than 1/2 inch.		X	
2. Outside fold of pleats not facing toward side seam.		X	
3. Pleats omitted.	X		
b. Belt:			
1. Ends finishing uneven distance from base of armhole by more than 1/2 inch.		X	
2. Twisted, in stitching to back, or positioned crookedly.		X	
3. Irregular in width by more than 1/4 inch.		X	
4. Finishing less than 1-3/4 inches or more than 2-1/4 inches wide.		X	
Combination label			
a. Missing, incorrect, illegible or misplaced.		X	
Hanger			
a. Misplaced, or off-center of back by more than 1/4 inch.			X
b. One or both ends not caught in collar joining seam.		X	
c. Less than 3/8 inch or more than 1/2 inch wide.			X
d. Finishing less than 2 inches or more than 2-1/2 inches long.			X
Bottom hem			
a. Twisted or puckered.			X
b. Uneven in width by more than 1/4 inch.			X
c. Stitching across ends of hem omitted.			X
d. Hem less than 1 inch or more than 1-1/2 inches wide.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

4.3.2.4 Size measurement defects.

Finished measurement	
1/2 Chest 1/2 sweep Length Back to belt Sleeve inseam Collar 1/2 bottom of sleeve	Any measurement deviating from the nominal dimension and tolerance included in table III shall be classified as a size measurement defect.
Equal length of sleeve	Sleeves uneven in length by more than 1/2 inch shall be classified as a size measurement defect.

4.3.2.5 Inspection levels and acceptable quality levels. The inspection levels and acceptable quality levels (AQL's) expressed in defects per hundred units (DHU) shall be as follows:

	AQL	Inspection level
For defects listed in 4.3.2.2 and 4.3.2.3:		II
Major	2.5	
Major and Minor A (combined)	15.0	
Total Major, Minor A and Minor B (combined)	25.0	
For defects listed in 4.3.2.4:		S-2
One class	4.0	

4.3.3 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing and marking requirements of section 5 of this specification are complied with. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Material	Any component missing, damaged or not as specified.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling, open and noncontinuous heat sealed seams and closure of polyethylene bag. Omission of vent hole in polyethylene bag.
	Bulged or distorted container.
Content	Number per container is more or less than required.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each buttoned smock shall be laid front down, the sides and sleeves folded in over the back and the bottom folded up to the shoulders to approximate dimensions of 15 by 10 inches. The size label shall be clearly visible in front so as to permit ready identification. Each folded smock shall be individually inserted in a snug-fitting flat style, clear polyethylene film bag of 0.00125 inch thickness (± 20 percent tolerance). The bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The final closure of

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

the bag shall be heat sealed with the heat seal made as close as possible to the open end. A 1/4 inch diameter hole shall be made at one corner of the polyethylene bag to allow excess air to escape. Alternatively, the final closure of the polyethylene bag may be accomplished by means of a tuck or reverse flap.

5.1.2 Level C. Smocks shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C as specified(see 6.2).

5.2.1 Level A. Forty-eight smocks of one type and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to PPP-B-636, style RSC-L, grade V2s. The inside of each container shall be fitted with a taped liner conforming to PPP-B-636, grade V3c. Level A packages shall be packed flat, reversed end for end, two in length, one in width, and 24 in depth within a shipping container. Inside dimensions of each container shall approximate 22 inches in length, 15 inches in width, and 18 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to UU-P-268, grade B. Each container shall be closed, waterproofed, and reinforced with flat strapping or tape banding in accordance with the appendix of the container specification. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes of one type only may be packed within the same container.

5.2.2 Level B. Forty-eight smocks of one type and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to PPP-B-636, style RSC-L, type CF or SF, variety SW, class domestic, grade 275. The inside of each shipping container shall be fitted with a taped liner conforming to PPP-B-636, type CF, variety SW, class domestic,grade 275. Level A packages shall be packed flat, reversed end for end, two in length, one in width, and 24 in depth within a shipping container. Inside dimensions of each container shall approximate 22 inches in length, 15 inches in width, and 18 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to UU-P-268, grade B. Each container shall be closed in accordance with method II as specified in the appendix of the container specification. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes of one type only may be packed within the same container.

5.2.2.1 When specified, shipping containers shall be fabricated from V3c or V3s fiberboard (see 6.2).

5.2.3 Level C. Smocks, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 Marking.

5.3.1 Civil agencies. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military agencies. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

5.3.3 Labels, mixed sizes. Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stencilling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

5.3.4 Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

STOCK NUMBER
NOMENCLATURE
QUANTITY
TYPE & SIZE

6. NOTES

6.1 Intended use. The type I smock is intended for wear by male personnel of civil agencies, as authorized. The type II smock is intended for wear by male personnel, as authorized, in both military and civil agencies.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number and date of this specification.
(b) Type and sizes required (see 1.2).
(c) When preproduction sample is required (see 3.2).
(d) When optional basic fabric is required (see 3.3.1.1) (civil agencies only).
(e) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(f) Whether V-board containers are required for level B shipments (see 5.2.2.1).

6.3 Samples. For access to samples, address the procuring office issuing the invitation for bids.

6.4 For civil agency procurements. When level B packaging is required for civil agency procurement, the requirements in 5.1.1 shall apply.

6.5 Supersession data. Comparison of the items of the superseded specifications, as applicable to this specification is as follows:

Superseded

DDD-S-00496d (DM)
DDD-S-496c

MIL-S-3969

MILITARY CUSTODIANS:

Army - GL
Navy - MS
Air Force - 03

Review activities:

Army - MD
Navy - MS
Air Force - 03
Defense Supply Agency - DM

Current

DDD-S-496e,
Type I

DDD-S-496e,
Type II


Preparing activity:

Army - GL

Civil Agencies Interest:

COM - NBS
HEW
VA


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

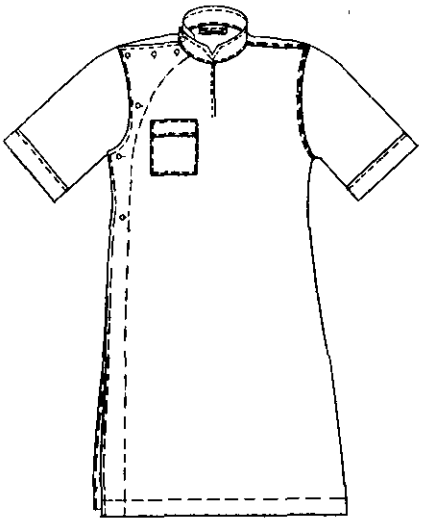


FRONT



DETAIL SHOWING
PENCIL POCKETS

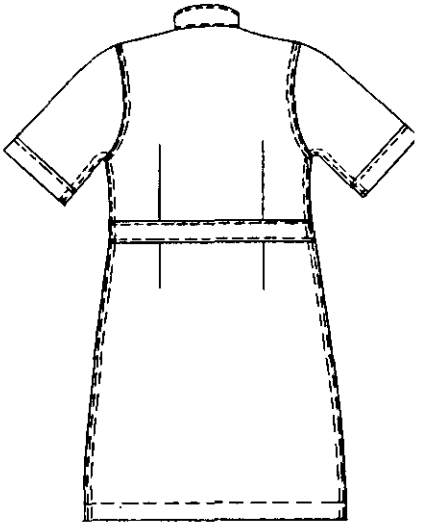

BACK



OPTIONAL 2 PIECE
SLEEVE, BACK

FIGURE 1, SMOCK, MAN'S DENTAL OPERATING, TYPE I

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.

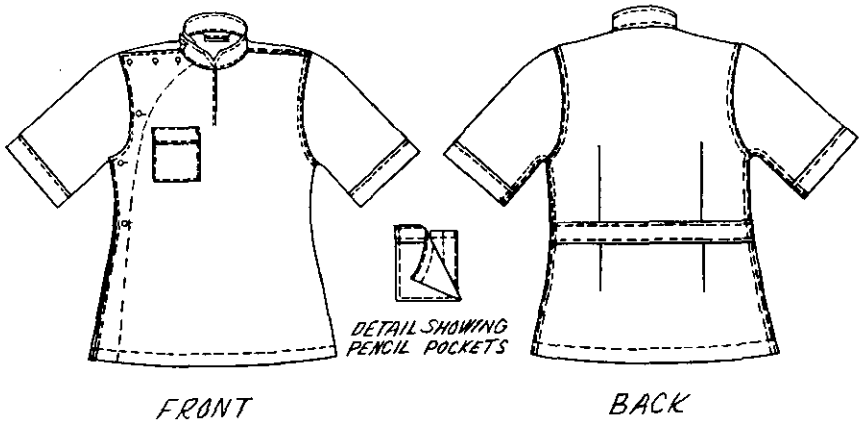


FIGURE 2, SMOCK, MAN'S, MEDICAL ASSISTANT, TYPE II

☆ U. S. GOVERNMENT PRINTING OFFICE: 1967 O - 302-504 (334)

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 15 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:35Z
Check the source to verify that this is the current version before use.