INCH-POUND
MIL-PRF-3098/90A
1 October 1997
SUPERSEDING
MIL-C-3098/90 (USAF)
30 August 1967

PERFORMANCE SPECIFICATION SHEET

CRYSTAL UNIT, QUARTZ, CR114/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-3098.

Pertinent characteristics: 2.9 MHz to 3.85 MHz; fundamental; noncontrolled; series resonance.

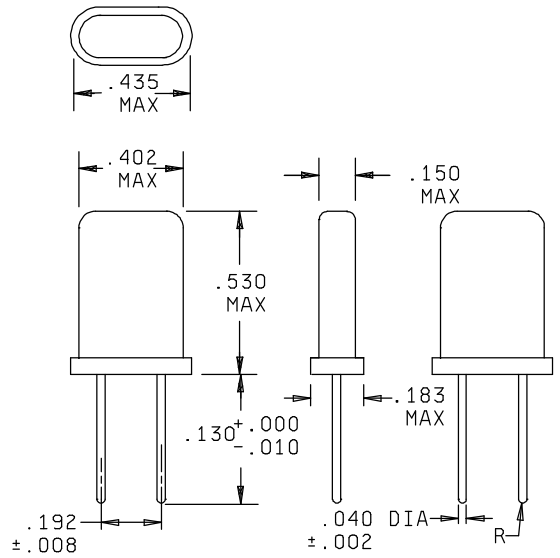

INCHES	MM	INCHES	MM
.002	.05	.183	4.65
.008	.20	.192	4.88
.010	.25	.402	10.21
.040	1.02	.435	11.05
.130	3.30	.530	13.46
.150	3.81		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking to be in accordance with MIL-PRF-3098.

FIGURE 1. Crystal unit - CR114/U.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:47Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, marking, and configuration: See figure 1.

Frequency range: 2.9 MHz to 3.85 MHz, inclusive.

Frequency tolerance:

Operating temperature range : ±0.005 percent.

Mode of oscillation: Fundamental.

Operating temperature range (noncontrolled): -55°C to +105°C, inclusive.

Capacitance, load: 32.0 pF ±.05 pF.

Resonance: Series.

Rated drive level: 1.0 mW, maximum.

Calibration values:

Resistance: 100 ohms.

Crystal current: 3.2 mA.

Capacitance, shunt: 7 pF, maximum.

Equivalent resistance: 300 ohms, maximum.

Shock: Method 202, MIL-STD-202.

Frequency change permitted: ±0.0005 percent.

Equivalent-resistance change permitted: ±15 percent.

Vibration: Method 204, MIL-STD-202, test condition A; 0.10 inch double amplitude or 5 gravity units, whichever is less.

Frequency change permitted: ±0.0005 percent.

Equivalent-resistance change permitted: ±15 percent.

Unwanted modes: Minimum unwanted mode effective resistance shall be at least twice that of the main mode, or greater, over the operating temperature range -55°C to +105°C.

Aging:

Frequency change permitted: ±0.0005 percent.

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - CR
Navy - EC
Air Force -85

Preparing activity:
DLA - CC

(Project 5955-0697-59)

Review activities:
Air Force - 11, 17, 19, 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:47Z
Check the source to verify that this is the current version before use.