INCH-POUND
MIL-PRF-3098/93A
27 August 1997
SUPERSEDING
MIL-C-3098/93 (USAF)
5 March 1968

PERFORMANCE SPECIFICATION SHEET

CRYSTAL UNIT, QUARTZ, CR117/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-3098.

Pertinent characteristics: 30 MHz to 63 MHz; third mechanical overtone; noncontrolled; series resonance.

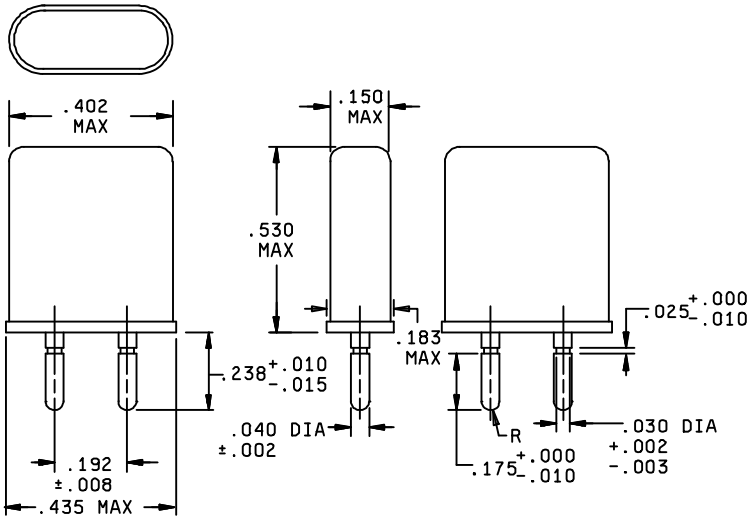

Inches	mm	Inches	mm
.002	.05	.150	3.81
.003	.08	.175	4.45
.008	.20	.183	4.65
.010	.25	.192	4.88
.015	.38	.238	6.05
.025	.64	.402	10.21
.030	.76	.435	11.05
.040	1.02	.530	13.46

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking to be in accordance with MIL-PRF-3098.

FIGURE 1 Crystal unit - CR117/U.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:47Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, marking, and configuration: See figure 1.

Frequency range: 30 MHz to 63 MHz, inclusive.

Frequency tolerance:

Operating temperature range: ±0.0015 percent of frequency measured at 25°C.

Reference temperature: ±0.001 percent.

Mode of oscillation: Third mechanical overtone.

Operating temperature range (noncontrolled): -40°C to +65°C, inclusive.

Reference temperature: 25°C.

Operable temperature range: +65°C to +80°C, inclusive.

Frequency and equivalent resistance: Method A, MIL-PRF-3098.

Resonance: Series.

Rated drive level: 1.0 mW, maximum.

Calibration values:

Resistance: 40 ohms.

Crystal current: 0.28 mA.

Capacitance, shunt: 7 pF, maximum.

Equivalent resistance: 40 ohms, maximum.

Shock: Method 202, MIL-STD-202.

Frequency change permitted: ±0.0005 percent.

Equivalent-resistance change permitted: ±10 percent.

Vibration: Method 204, MIL-STD-202, test condition A; 0.03 inch (0.06 inch total excursion) 10 cps to 55 cps; amplitude to produce 5 gravity units, 55 cps to 500 cps.

Frequency change permitted: ±0.0005 percent.

Equivalent-resistance change permitted: ±10 percent.

Aging:

Frequency change permitted: ±0.0005 percent.

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Air Force - 85

Preparing activity:
DLA - CC

Review activities:
Air Force - 11, 17, 19

(Project 5955-0697-61)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:47Z
Check the source to verify that this is the current version before use.