The documentation and process conversion measures necessary to comply with this amendment shall be completed by 20 Oct 94.

INCH-POUND

MIL-S-19500/477B
AMENDMENT 2
20 July 1994

MILITARY SPECIFICATION

SEMICONDUCTOR DEVICE, DIODE, SILICON, FAST RECOVERY, POWER RECTIFIER,
TYPES 1N5802, 1N5804, 1N5806, 1N5807, 1N5809, AND 1N5811,
1N5802US, 1N5804US, 1N5806US, 1N5807US, 1N5809US, AND 1N5811US
JAN, JANTX, JANTXV, JANS, AND JANC

This amendment forms a part of MIL-S-19500/477B, dated 25 January 1993, and is approved for use by all Departments and Agencies of the Department of Defense.

The documentation and process conversion measures necessary to comply with revision B, dated 25 January 1993 for group E, table II shall be 25 January 1994.

PAGE 1

1.3.1, T_{STG}, delete "+200°C" and substitute "+175°C".

1.3.2, in the I_{O1} column, add "LO = .375" after T_L = +75°C. On the last column, delete "$R_{\theta JL}$ at" and substitute "$R_{\theta JEC}$". Footnote 1, delete "T_C" and substitute "T_{EC}", footnotes 3 and 5, delete "T_C" and substitute "T_L".

PAGE 2

3.2, add the following abbreviations

"EC . . . . . End cap.

$I_{(BR)}$ . . . . . Current for testing breakdown voltage."

PAGE 4

4.3.1.1b, second line, delete "V_{RWM} = rated" and substitute "$V_R = V_{RWM}$ rated".

PAGE 5

4.4.3.1c, third line, delete "T_A = room ambient as defined in the general requirements of paragraph 4.5 of MIL-STD-750."

* 4.5.1, fourth sentence, delete "maximum limit for $R_{\theta JL}$ or $R_{\theta JE}$ under these test conditions shall be as specified in paragraph 1.3.2" and substitute "maximum limit for $R_{\theta JL}$ or $R_{\theta JEC}$ under these test conditions shall be as specified in 1.3.2". (Change from amendment 1.)

The attached insertable replacement pages listed below are replacements for stipulated pages. When the new pages have been entered in the document, insert the amendment as the cover sheet to the specification.

Replacement page	Pages replaced
13	Reprinted without change
14	14

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T02:21Z
Check the source to verify that this is the current version before use.

PAGE 7

TABLE I, subgroup 2, breakdown voltage, condition column, delete "I_R" and substitute "$I_{(BR)}$".

PAGE 8

TABLE I, subgroup 3, breakdown voltage, condition column, delete "I_R" and substitute "$I_{(BR)}$".

PAGE 9

TABLE I, subgroup 4, forward recovery time, condition column, delete "t_r = 8 ns measured to 1.1 x V_f" and substitute "$t_p \geq 20$ ns, t_r = 8 ns; the t_{fr} test is measured at $V_{FR} = 1.1 \times V_F$."

Delete "(pk)" in same column (2 places).

TABLE II, inspection column, delete "1/". In subgroup 2, blocking life, condition column, delete "VR dc = 0.8 - 0.85%" and substitute "V_R dc = 80 - 85 percent".

PAGE 11

* Dimensions table for part numbers 1N5807, 1N5809, and 1N5811, symbol column, delete ϕB row and substitute the following:

"

ϕB	.115	.165	2.92	4.19	4

"

PAGE 15

4.5.2, last line, delete "is" after limit and substitute "shall".

6.3, delete "14522" in the table and substitute "14552".

The margins of this amendment are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

CONCLUDING MATERIAL


Custodians:
Army - ER
Navy - EC
Air Force - 17
NASA - NA

Review activities:
Army - AR, AV, MI, SM
Navy - AS, CG, MC
Air Force - 19, 85, 99

Preparing activity:
DLA - ES

(Project 5961-1670)

Source: https://assist.dla.mil -- Downloaded: 20261O-19T02:21Z
Check the source to verify that this is the current version before use.

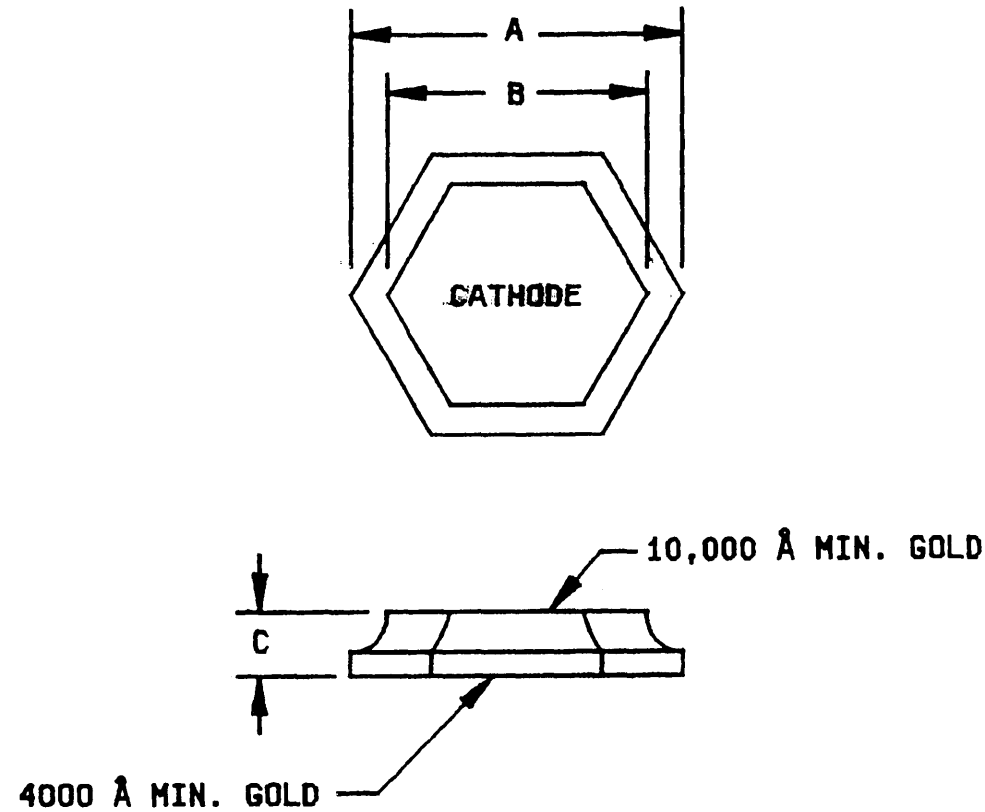

Symbol	Dimensions			
	Millimeters		Inches	
	Min	Max	Min	Max
A	1.19	1.35	.047	.053
B	0.84	0.94	.033	.037
C	0.18	0.28	.007	.011

1N5802, 1N5804, 1N5806


Symbol	Dimensions			
	Millimeters		Inches	
	Min	Max	Min	Max
A	2.16	2.31	.085	.091
B	1.83	1.93	.072	.076
C	0.18	0.28	.007	.011


1N5807, 1N5809, 1N5811

FIGURE 4. JANC (A-version) die dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026l0-19T02:21Z
Check the source to verify that this is the current version before use.

4.3.4 Group B and group C lute-test samples. Samples that have been subjected to group B.

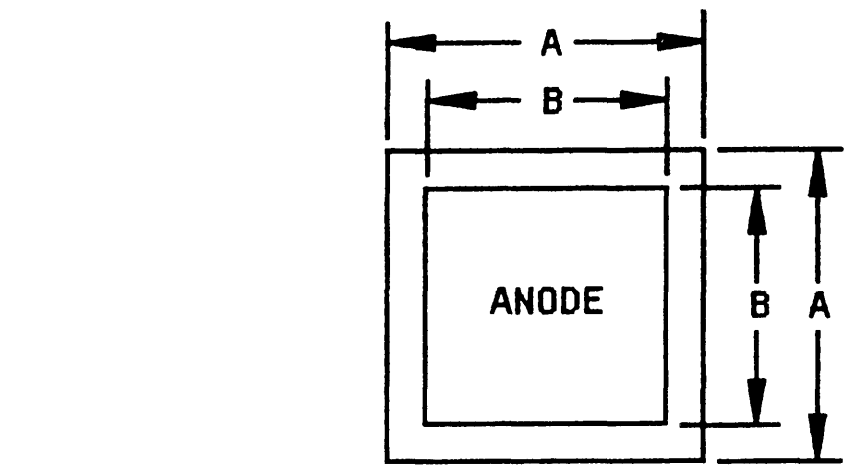

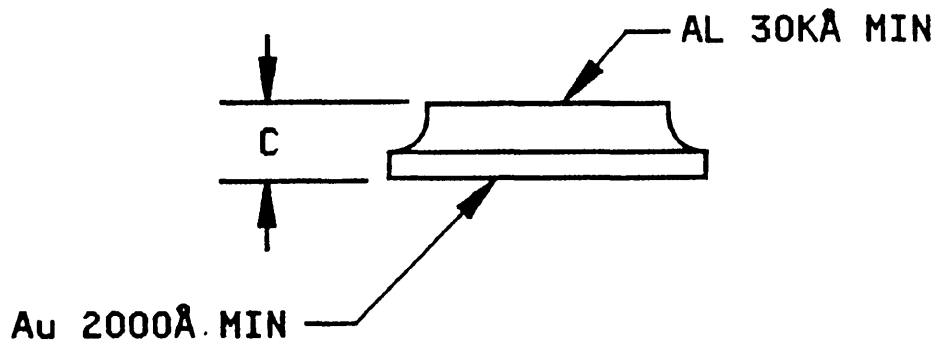

Symbol	Dimensions			
	Millimeters		Inches	
	Min	Max	Min	Max
A	0.79	0.94	.031	.037
B	0.43	0.58	.017	.023
C	0.20	0.30	.008	.012

1N5802, 1N5804, 1N5806

Symbol	Dimensions			
	Millimeters		Inches	
	Min	Max	Min	Max
A	1.57	1.73	.062	.068
B	1.27	1.42	.050	.056
C	0.20	0.30	.008	.012

1N5807, 1N5809, 1N5811

FIGURE 5. JANC (B-version) die dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:21Z
Check the source to verify that this is the current version before use.