The documentation and process conversion measures necessary to comply with this document shall be completed by 10 April 2006.

INCH POUND

MIL-PRF-19500/505D
10 January 2006
SUPERSEDING
MIL-PRF-19500/505C
30 November 2004

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, DARLINGTON TRANSISTOR, PNP, SILICON, POWER,
TYPES 2N6286 AND 2N6287, JAN, JANTX, AND JANTXV

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19500.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for PNP, Darlington, power transistors. Three levels of product assurance are provided for each encapsulated device type as specified in MIL-PRF-19500.

1.2 Physical dimensions. See figure 1 (similar to TO-3).

1.3 Maximum ratings at T_C = +25°C unless otherwise specified.

Type	P_T		$R_{\theta JC}$	V_{CBO}	V_{CEO}	V_{EBO}	I_C	I_B	T_J and T_{STG}
	T_C = +25°C (1)	T_C = +100°C							
	W	W	°C/W	V dc	V dc	V dc	A dc	A dc	°C
2N6286	175	87.5	0.855	-80	-80	-7	-20	-0.5	-65 to +175
2N6287	175	87.5	0.855	-100	-100	-7	-20	-0.5	-65 to +175

(1) Derate linearly at 1.17 W/°C above T_C > +25°C.

* Comments, suggestions, or questions on this document should be addressed to Defense Supply Center, Columbus, ATTN: DSCC-VAC, P.O. Box 3990, Columbus, OH 43218-3990, or emailed to Semiconductor@dscc.dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at http://assist.daps.dla.mil/.

AMSC N/A

FSC 5961

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:33Z
Check the source to verify that this is the current version before use.

1.4 Primary electrical characteristics.

Limit	h_{FE2} (1) V_{CE} = -3 V dc I_C = -10 A dc	h_{FE3} (1) V_{CE} = -3 V dc I_C = -20 A dc	$V_{CE(sat)1}$ I_C = -20 A dc I_B = -200 mA dc	$V_{CE(sat)2}$ I_C = -10 A dc I_B = -40 mA dc	$V_{BE(sat)}$ I_C = -20 A dc I_B = -200 mA dc	Switching	
						t_{on}	t_{off}
			V dc	V dc	V dc	µs	µs
Min	1,250	300					
Max	18,000		-3.0	-2.0	-4.0	2	10

Limit	C_{obo} V_{CB} = -10 V dc I_E = 0 100 kHz ≤ f ≤ 1 MHz	h_{fe} V_{CE} = -3 V dc I_C = -10 A dc f = 1 kHz	$\lvert h_{fe} \rvert$ V_{CE} = -3 V dc I_C = -10 A dc f = 1 MHz
	pF		
Min		300	8
Max	400		80

(1) Pulsed (see 4.5.1).

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3, 4, or 5 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3, 4, or 5 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-19500 - Semiconductor Devices, General Specification for.


DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Copies of these documents are available online at http://assist.daps.dla.mil/quicksearch/ or http://assist.daps.dla.mil/ or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:33Z
Check the source to verify that this is the current version before use.

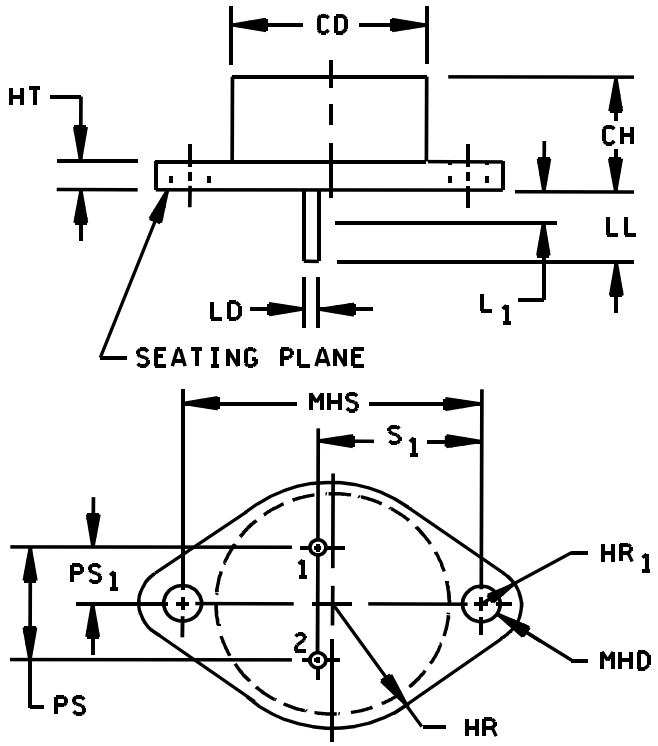

NOTES:

1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. Body contour is optional within zone defined by CD
4. These dimensions shall be measured at points .050 (1.27 mm) to 0.055 (1.40 mm) below seating plane.
5. Both terminals.
6. At both ends.
7. Two holes.
8. Terminal 1 is the emitter, terminal 2 is base. The collector shall be electrically connected to the case.
9. LD applies between L1 and LL. Diameter is uncontrolled in L1.
10. In accordance with ASME Y14.5M, diameters are equivalent to ϕx symbology.

FIGURE 1. Physical dimensions (similar to TO-3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:33Z
Check the source to verify that this is the current version before use.

Symbol	Dimensions				Notes
	Inches		Millimeters		
	Min	Max			
CD		.875		22.23	3
CH	.250	.360	6.35	9.14	
HR	.495	.525	12.57	13.34	
HR_1	.131	.188	3.33	4.78	
HT	.060	.135	1.52	3.43	
LD	.038	.043	0.97	1.09	5, 9
LL	.312	.500	7.92	12.7	5
L_1		.050		1.27	5, 9
MHD	.151	.165	3.84	4.19	7
MHS	1.177	1.197	29.90	30.40	
PS	.420	.440	10.67	11.18	4
PS_1	.205	.225	5.21	5.72	
S_1	.655	.675	16.64	17.15	

* FIGURE 1. Physical dimensions (similar to TO-3) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:33Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 General. The individual item requirements shall be as specified in MIL-PRF-19500 and as modified herein.

3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturers list before contract award (see 4.2 and 6.3).

3.3 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

3.4 Interface and physical dimensions. Interface and physical dimensions shall be as specified in MIL-PRF-19500, and on figure 1 (similar to TO-3) herein.

3.4.1 Lead finish. Lead finish shall be solderable in accordance with MIL-PRF-19500, MIL-STD-750, and herein. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

3.5 Marking. Devices shall be marked in accordance with MIL-PRF-19500.

3.6 Electrical performance characteristics. Unless otherwise specified, the electrical performance characteristics are as specified in 1.3, 1.4, and table I herein.

3.7 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table I.

3.8 Workmanship. Semiconductor devices shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4 and tables I and II).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500 and herein.

4.2.1 Group E qualification. Group E inspection shall be performed for qualification or re-qualification only. In case qualification was awarded to a prior revision of the specification sheet that did not request the performance of table III tests, the tests specified in table III herein that were not performed in the prior revision shall be performed on the first inspection lot of this revision to maintain qualification.

* 4.2.1.1 Group E thermal impedance. Each supplier shall submit a thermal impedance ($Z_{\theta JX}$) histogram of the entire qualification lot. The histogram data shall be taken prior to the removal of devices that are atypical for thermal impedance. Thermal impedance curves (from $Z_{\theta JX}$ test pulse time to $R_{\theta JX}$ minimum steady-state time) of the best device in the qual lot and the worst device in the qual lot (that meets the supplier proposed screening limit), or from the thermal grouping, shall be submitted. The optimal test conditions and proposed initial thermal impedance screening limit shall be provided in the qualification report. Data indicating how the optimal test conditions were derived for $Z_{\theta JX}$ shall also be submitted. The proposed specification maximum thermal impedance curve shall be submitted. The qualifying activity may approve a different $Z_{\theta JX}$ limit not to exceed the specification's thermal curve for conformance inspection end-point measurements as applicable**.** Equivalent data, procedures, or statistical process control plans may be used for part, or all, of the above requirements. The approved thermal impedance conditions and limit for $Z_{\theta JX}$ shall be used by the supplier in screening and table I, subgroup 2. The approved thermal resistance conditions for $R_{\theta JX}$ shall be used by the supplier for conformance inspection. For product families with similar thermal characteristics based on the same physical and thermal die, package, and construction combination (thermal grouping), the supplier may use the same thermal impedance curves.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:33Z
Check the source to verify that this is the current version before use.

* 4.3 Screening. Screening shall be in accordance with table IV of MIL-PRF-19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen (see table IV of MIL-PRF-19500)	Measurements
	JANTX and JANTXV levels
(1) 3c	Thermal impedance method 3131 of MIL-STD-750 (see 4.3.2)
7	Optional.
11	I_{CEX1} and h_{FE1}
12	See 4.3.1
13	Subgroup 2 of table I herein; ΔI_{CEX1} = 100 percent of initial value or 100 μA dc, whichever is greater. Δh_{FE1} = ±40 percent of initial value.
14	Required.

(1) Shall be performed anytime after temperature cycling, screen 3a of 4.3 herein; and does not need to be repeated in screening requirements.

4.3.1 Power burn-in conditions. Power burn-in conditions are as follows: T_J = +162.5°C ±12.5°C, $V_{CE} \geq$ -10 V dc. NOTE: No heat sink or forced air cooling on the devices shall be permitted.

* 4.3.2 Thermal impedance. The thermal impedance measurements shall be performed in accordance with method 3131 of MIL-STD-750 using the guidelines in that method for determining I_M, I_H, t_H, t_{SW} (V_C and V_H where appropriate). Measurement delay time (t_{MD}) = 70 μs max.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with MIL-PRF-19500, and table I herein. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:33Z
Check the source to verify that this is the current version before use.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VIb (JAN, JANTX, and JANTXV) of MIL-PRF-19500. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein. Delta requirements shall be in accordance with the applicable step of table II herein.

Subgroup	Method	Condition
B3	1037	For solder die attach: $V_{CB} \geq -10$ V dc; $T_A \leq +35°C$, 2,000 cycles.
B3	1027	For eutectic die attach: $T_A \leq +35°C$ adjust P_T to achieve $T_J = +150°C$ minimum, $V_{CB} \geq -10$ V dc.
B5	3131	$R_{\theta JC} = 0.855°C/W$ (maximum).

* 4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VII of MIL-PRF-19500. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein. Delta requirements shall be in accordance with the applicable step of table II herein.

Subgroup	Method	Condition
C2	2036	Tension: Test condition A; weight = 10 lbs; time = 15 s.
C6	1037	For solder die attach: $V_{CB} \geq -10$ V dc; $T_A \leq 35°C$, 6,000 cycles.
C6	1026	For eutectic die attach: $T_A \leq +35°C$ adjust P_T to achieve $T_J = +150°C$ minimum, $V_{CB} \geq -10$ V dc.

* 4.4.4 Group E inspection. Group E inspection shall be conducted in accordance with the conditions specified for subgroup testing in appendix E, table IX of MIL-PRF-19500 and as specified in table III herein. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2. Delta requirements shall be in accordance with the applicable step of table II herein.

4.5 Method of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:33Z
Check the source to verify that this is the current version before use.

* TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical examination	2071					
Subgroup 2						
Thermal impedance	3131	See 4.3.3	$Z_{\theta JX}$			°C/W
Breakdown voltage, collector - emitter	3011	Bias condition D; I_C = -100 mA dc; pulsed (see 4.5.1)	$V_{(BR)CEO}$			
2N6286				-80		V dc
2N6287				-100		V dc
Collector - emitter cutoff current	3041	Bias condition A; V_{BE} = +1.5 V dc	I_{CEX1}		-0.5	mA dc
2N6286		V_{CE} = -80 V dc				
2N6287		V_{CE} = -100 V dc				
Collector - emitter cutoff current	3041	Bias condition D	I_{CEO}		-1.0	mA dc
2N6286		V_{CE} = -40 V dc				
2N6287		V_{CE} = -50 V dc				
Emitter - base cutoff current	3061	Bias condition D; V_{EB} = -7 V dc	I_{EBO}		-2.5	mA dc
Base – emitter (nonsaturated)	3066	Test condition B; V_{CE} = -3 V dc; I_C = -10 A dc	V_{BE}		-2.8	V dc
Base - emitter voltage (saturated)	3066	Test condition A; I_C = -20 A dc; I_B = -200 mA dc; pulsed (see 4.5.1)	$V_{BE(sat)}$		-4.0	V dc
Collector - emitter saturated voltage	3071	I_C = -20 A dc; I_B = -200 mA dc; pulsed (see 4.5.1)	$V_{CE(sat)1}$		-3.0	V dc
Collector - emitter saturated voltage	3071	I_C = -10 A dc; I_B = -40 mA dc; pulsed (see 4.5.1)	$V_{CE(sat)2}$		-2.0	V dc
Forward-current transfer ratio	3076	V_{CE} = -3 V dc; I_C = -1 A dc; pulsed (see 4.5.1)	h_{FE1}	1,500		
Forward-current transfer ratio	3076	V_{CE} = -3 V dc; I_C = -10 A dc; pulsed (see 4.5.1)	h_{FE2}	1,250	18,000	
Forward-current transfer ratio	3076	V_{CE} = -3 V dc; I_C = -20 A dc; pulsed (see 4.5.1)	h_{FE3}	300		

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:33Z
Check the source to verify that this is the current version before use.

* TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 3						
High-temperature operation:		T_A = +150°C				
Collector - emitter cutoff current	3041	Bias condition A; V_{BE} = +1.5 V dc;	I_{CEX2}		-5.0	mA dc
2N6286		V_{CE} = -80 V dc				
2N6287		V_{CE} = -100 V dc				
Collector - emitter saturated voltage	3071	I_C = -10 A dc; I_B = -40 mA dc; pulsed (see 4.5.1)	$V_{CE(sat)3}$		-2.0	V dc
Low-temperature operation:		T_A = -55°C				
Forward-current transfer ratio	3076	V_{CE} = -3 V dc; I_C = -10 A dc; pulsed (see 4.5.1)	h_{FE4}	150		
Subgroup 4						
Pulse response:	3251	Test condition A, except test circuit and pulse requirements in accordance with figure 2.				
Turn-on time		V_{CC} = -30 V dc; I_C = -10 A dc; I_B = -40 mA dc	t_{on}		2.0	µs
Turn-off time		V_{CC} = -30 V dc; I_C = -10 A dc; I_{B1} = I_{B2} = -40 mA dc	t_{off}		10	µs
Magnitude of common-emitter small-signal short-circuit forward- current transfer ratio	3306	V_{CE} = -3 V dc; I_C = -10 A dc; f = 1.0 MHz	$\lvert h_{fe} \rvert$	8	80	
Small-signal short-circuit forward-current transfer ratio	3206	V_{CE} = -3 V dc; I_C = -10 A dc f = 1.0 kHz	h_{fe}	300		
Open circuit output capacitance	3236	V_{CB} = -10 V dc; I_E = 0; 100 kHz ≤ f ≤ 1 MHz	C_{obo}		400	pF
Subgroup 5						
Safe operating area (continuous dc)	3051	T_C = +25°C; t = 1 s; 1 cycle; (see figure 3)				
Test 1		V_{CE} = -8.75 V dc; I_C = -20 A dc				
Test 2		V_{CE} = -30 V dc; I_C = -5.8 A dc				
Test 3						
2N6286		V_{CE} = -80 V dc; I_C = -100 mA dc				
2N6287		V_{CE} = -100 V dc; I_C = -100 mA dc				

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:33Z
Check the source to verify that this is the current version before use.

* TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 5 - Continued						
Electrical measurements		See table I, subgroup 2				
Safe operating area (switching)	3053	Load condition C; (unclamped inductive load); (see figure 4) T_A = +25°C; $R_s \leq 0.1\ \Omega$; $t_r + t_f \leq 15$ ns; duty cycle ≤ 2 percent				
Test 1		t_p = 80 μs; (vary to obtain I_C); $R_{BB1} \geq 50\ \Omega$; $V_{BB1} \geq -10$ V dc; $R_{BB2} = \infty$; V_{BB2} = 0; I_C = -20 A dc; $V_{CC} \geq -50$ V dc; The coil used shall provide a minimum inductance of 1 mH at 20 A. (For reference only; two coils in parallel (Super Electric Corporation type S16884 or equivalent).)				
Test 2		t_p = 1 ms; (vary to obtain I_C); $R_{BB1} \geq 50\ \Omega$; $V_{BB1} \geq -10$ V dc; $R_{BB2} = \infty$; V_{BB2} = 0; I_C = -500 mA dc; $V_{CC} \geq -50$ V dc; The coil used shall provide a minimum inductance of 100 mH at 500 mA. (For reference only; two coils in series, 80 mH and 20 mH windings (Triad C-48u or equivalent).)				
Electrical measurements		See table I, subgroup 2				
Safe operating area (switching)	3053	Load condition B; (clamped inductive load); T_A = +25°C; R_s = 0.1 Ω; $t_r + t_f \leq 1.0$ μs; duty cycle ≤ 2 percent; t_p = 1 ms (vary to obtain I_C); R_{BB1} = 50 Ω; V_{BB1} = -10 V dc; R_{BB2} = 100 Ω; V_{BB2} = +1.5 V dc; V_{CC} = -25 V dc; I_C = -20 A dc; $R_L \leq 2\ \Omega$; L = 5 mH; (Four coils in parallel, 20 mH windings (Triad C-48u or equivalent)).				
2N6286 2N6287		Clamp voltage = 80 +0, -5 V dc Clamp voltage = 100 +0, -5 V dc Device fails if clamp voltage is not reached				
Electrical measurements		See table I, subgroup 2				
Subgroups 6 and 7						
Not applicable						

1/ For sampling plan, see MIL-PRF-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:33Z
Check the source to verify that this is the current version before use.

* TABLE II. Group B, C, and E delta measurements. 1/ 2/ 3/

Step	Inspection	MIL-STD-750		Symbol	Limit
		Method	Conditions		
1	Forward current transfer ratio	3076	V_{CE} = -3 V dc; I_C = -1 A dc; pulsed (see 4.5.1)	Δh_{FE1}	± 40 percent change from initial reading.


1/ The delta measurements for table VIb (JAN, JANTX and JANTXV) are: Subgroups 3 and 6 of MIL-PRF-19500, see table II, step 1 above.
2/ The delta measurement for table VII is: Subgroup 6 of MIL-PRF-19500, see table II, step 1 above.
3/ The delta measurements for table IX of MIL-PRF-19500 are: Subgroups 1 and 2, see table II, step 1 above.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:33Z
Check the source to verify that this is the current version before use.

* TABLE III. Group E inspection (all quality levels) - for qualification or re-qualification only.

Inspection	MIL-STD-750		Qualification and large lot quality conformance inspection
	Method	Conditions	
Subgroup 1			45 devices c = 0
Temperature cycling	1051	Test condition C, 500 cycles.	
Hermetic seal Fine leak Gross leak	1071	 Test conditions G or H Test conditions C or D	
End-point electrical measurements		See table I, subgroup 2 and table II herein.	
Subgroup 2			45 devices c = 0
Intermittent life	1037	Intermittent operation life: $V_{CB} \geq 10$ V dc, 6,000 cycles.	
End-point electrical measurements		See table I, subgroup 2 and table II herein.	
Subgroup 4			Sample size N/A
Thermal impedance curves		See 4.2.1.1	
Subgroup 5			
Not applicable			
Subgroup 6			3 devices
ESD	1020	Testing not required for devices listed as class 3. Testing required for nonsensitive listing to prove capability.	
Subgroup 8			45 devices c = 0
Reverse stability	1033	Condition B.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:33Z
Check the source to verify that this is the current version before use.

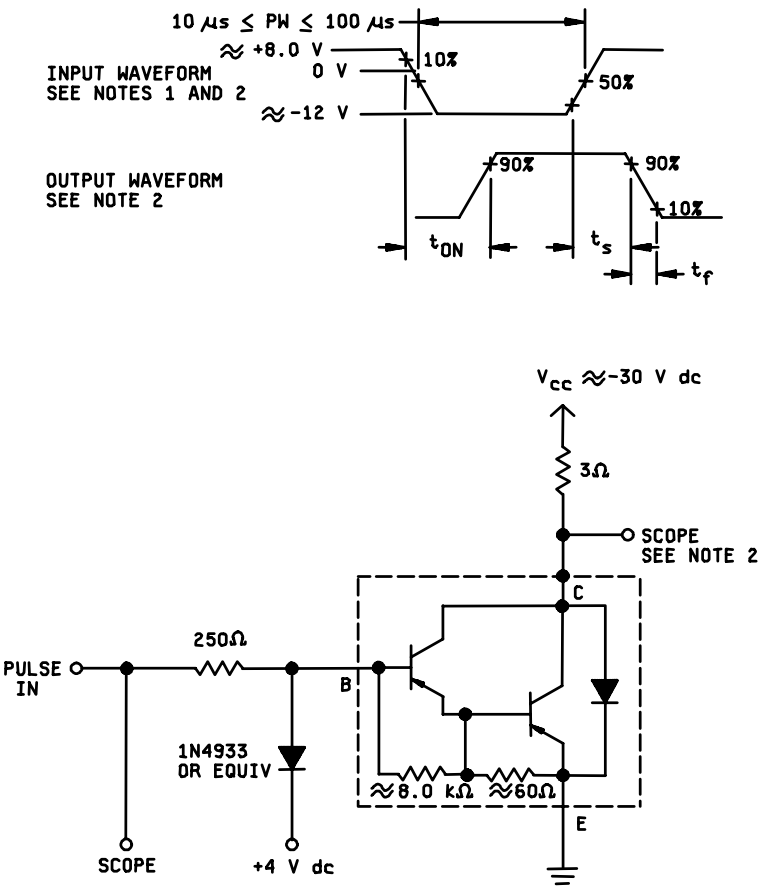

NOTES:

1. The input waveform is supplied by a pulse generator with the following characteristics: $t_r \leq 20$ ns, $t_f \leq 20$ ns, Z_{out} = 50 Ω, PW = 23 µs, duty cycle ≤ 2 percent.
2. The output waveform is monitored on a sampling oscilloscope with $Z_{in} \geq 20$ MΩ, $C_{in} \leq 11.5$ pF, $t_r \leq 2$ ns.
3. Resistors shall be noninductive types.
4. The dc power supplies may require additional by-passing in order to minimize ringing.

FIGURE 2. Pulse response test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:33Z
Check the source to verify that this is the current version before use.

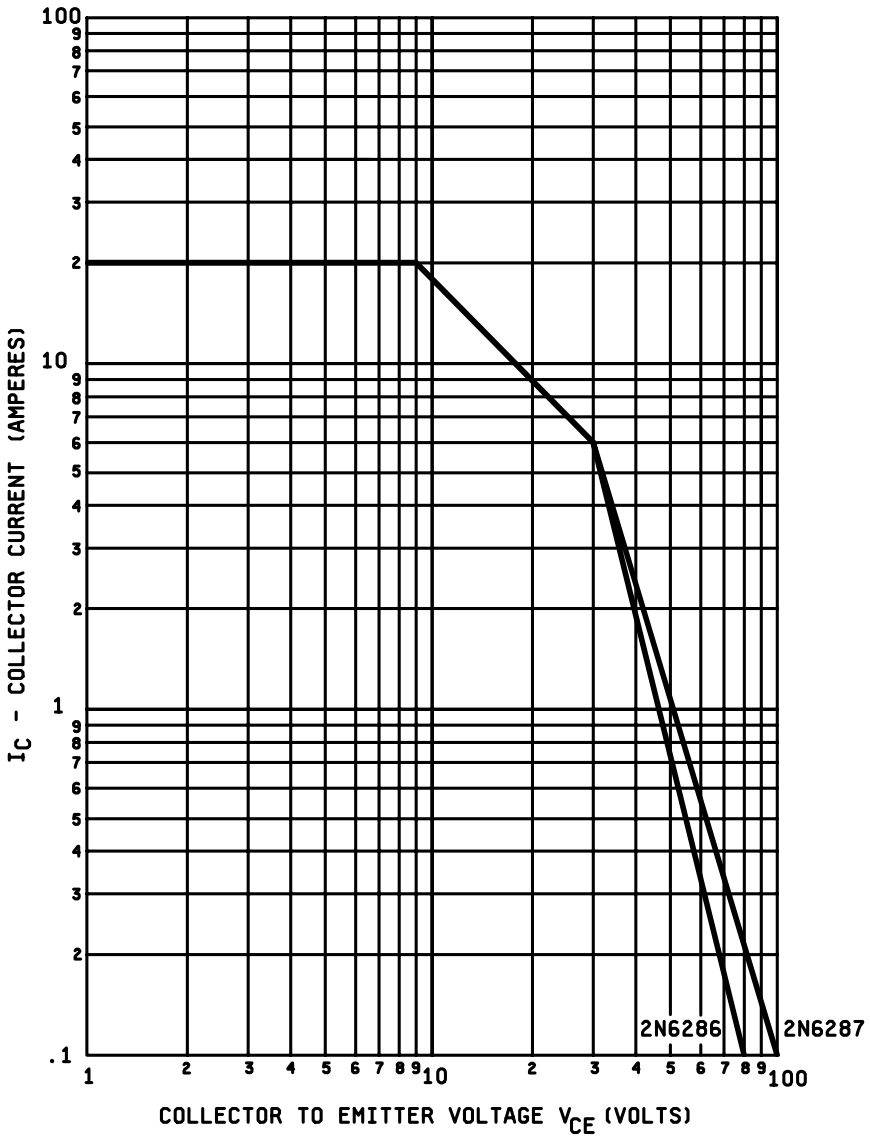


FIGURE 3. Maximum safe operating area (continuous dc).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:33Z
Check the source to verify that this is the current version before use.

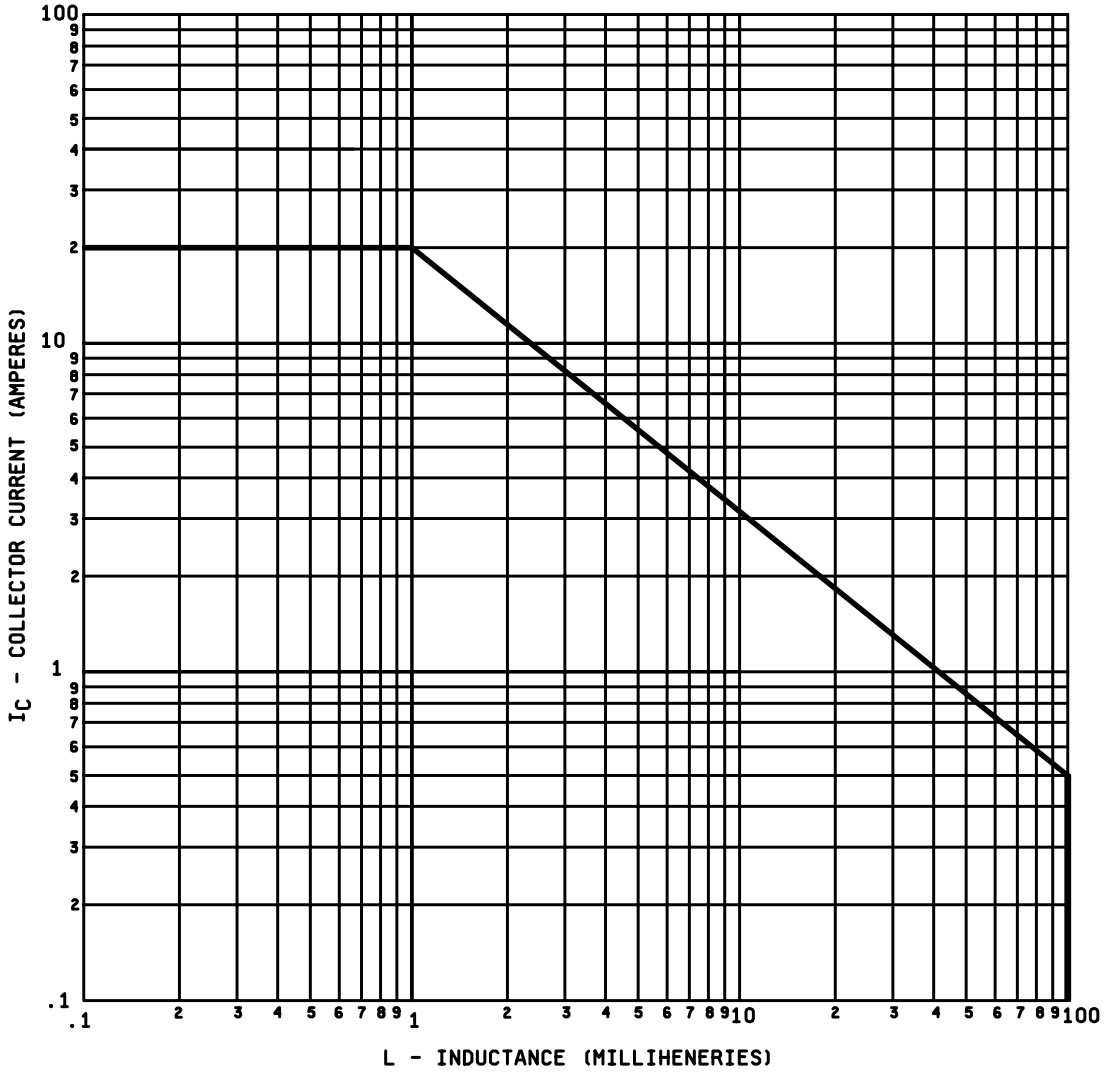


FIGURE 4. Safe operating area for switching between saturation and cutoff (unclamped inductive load).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:33Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the Military Service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The notes specified in MIL-PRF-19500 are applicable to this specification.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Packaging requirements (see 5.1).

c. Lead finish (see 3.4.1).

d. Product assurance level and type designator.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML 19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from Defense Supply Center, Columbus, ATTN: DSCC/VQE, P.O. Box 3990, Columbus, OH 43218-3990 or e-mail vqe.chief@dla.mil.

6.4 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Air Force - 11
NASA - NA
DLA - CC

Preparing activity:
DLA - CC

(Project 5961-2005-017)

Review activities:
Air Force - 19, 99

* NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:33Z
Check the source to verify that this is the current version before use.