MIL-B-49430/8B(ER)

15 June 1987


SUPERSEDING
MIL-B-49430/8A(ER)
4 January 1985


MILITARY SPECIFICATION SHEET

BATTERY, NON-RECHARGEABLE, LITHIUM SULFUR DIOXIDE BA-5600/U

This specifiction sheet is approved for use within Laboratory Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the lithium sulfur dioxide non-rechargeable battery described herein shall consist of this document and the latest issue of MIL-B-49430(ER).

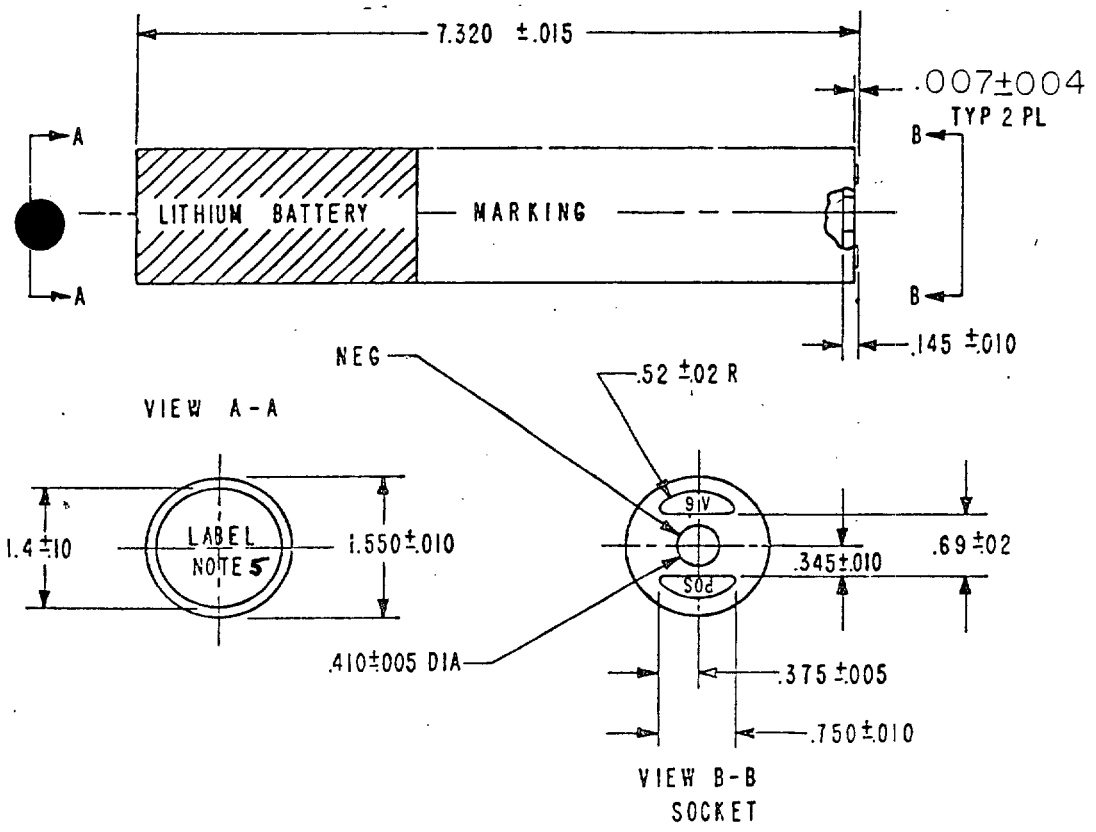

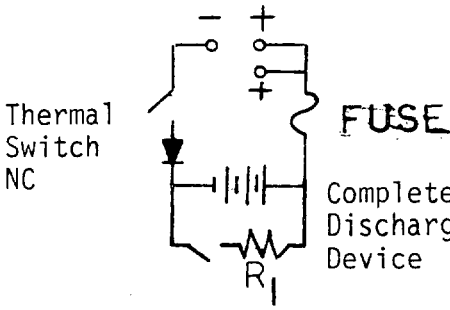

INCHES	MM
0.004	0.10
0.007	0.18
0.010	0.25
0.015	0.38
0.020	0.51
0.145	3.68
0.345	8.76
0.375	9.53
0.410	10.41
0.520	13.21
0.690	17.53
0.750	19.05
1.400	35.56
1.550	39.37
7.320	185.93

Figure 1. Battery dimensions and wiring schematic.

FSC 6135

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:05Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.

2. Socket and wiring schematic to be printed on jackets in suitable location near the socket terminals of the battery.

3. The battery case shall be fabricated in such a way as to allow cell venting upon provocation without rupture.

4. The battery terminals shall consist of two raised crescent-shaped (positive) terminals surrounding one central, recessed disc (negative) terminal. All terminals are integral with one end of battery. (See Figure 1).

5. Adhesive decal shall be red/orange for field color: Decal markings shall be in black letters (3/32 inch high) "This End Out", "Date Installed".

6. R_1 value shall be between 90 ohms and 130 ohms and have a power rating of 1.0 watt.

REQUIREMENTS:

Dimensions and configuration: See Figure 1.

Maximum voltage: 9.15 volts.

Minimum voltage for capacity: 6.00 volts.

The battery shall contain a 2.25 ampere non-replaceable slow blow fuse in the positive leg.

The battery shall contain in series a diode. See paragraph 3.5.5.2 of the Basic Specification.

High Temperature Switch: A high temperature switch or thermal fuse shall be employed internal to the battery as described in paragraphs 3.5.5 and 3.5.5.1 of the Basic Specification.

Terminals: Two (2) positive and one (1) negative terminals, all at one end of battery. (see note 4).

Weight (maximum): 0.8 pound (363 grams).

Capacity Tests: When the battery is tested in accordance with the methods of examination and tests of this specification, the minimum capacity test requirements shall be as specified below:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:05Z
Check the source to verify that this is the current version before use.

Capacity Test	Battery Capacity Requirement in Hours to 6.00 Volts
I	2.9
L	1.6
H	5.4
HT	5.2
LT	1.4
T	2.7
D	2.7
ILR	1000

Initial voltage delay: During the I,H,HT,T,D and ILR discharge tests, initial voltages below 5.70 volts cannot exceed a 5.0 second duration. During the L and LT discharge tests initial voltages below 5.70 volts cannot exceed a 60.0 second duration.

METHODS OF EXAMINATION AND TESTS

Capacity tests:

(1) Storage: Details on storage conditions for all capacity test are specified in basic specification. (See 4.8.9)

(2) Discharge Cells: Discharge at 2.0 Amp constant current at 70±5°F for a minimum of 3 hours to 2.00 volts. Continue discharge to zero volts. Then discharge at 1.0 ampere constant current for 6 hours into voltage reversal.

Batteries: For all capacity tests except the H, HT and ILR, the batteries shall be discharged at two amperes constant current to zero volts. For the H and HT capacity tests the battery shall be discharged through two amperes constant current for five minutes followed by open circuit for five minutes. This cycle shall be repeated until closed circuit voltage reaches zero volts. For the ILR test a fixed resistance of 1575 ohms shall be used to cut off voltage of 6.00 volts or 1000 hours.

Closed circuit voltage test: Load resistance of 8 ohms shall be used. Voltage shall be above 6.00 volts within 5.0 seconds.

Custodian:
Army-ER

Preparing Activity
Army-ER
(Project 6135-A201-08)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:05Z
Check the source to verify that this is the current version before use.