INCH-POUND

MIL-B-49430/8D(ER)
1 August 1991

SUPERSEDING
MIL-B-49430/8C(ER)
26 April 1988

MILITARY SPECIFICATION SHEET

BATTERY, NON-RECHARGEABLE, LITHIUM SULFUR DIOXIDE BA-5600/U

This specification sheet is approved for use within Laboratory Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-49430(ER).

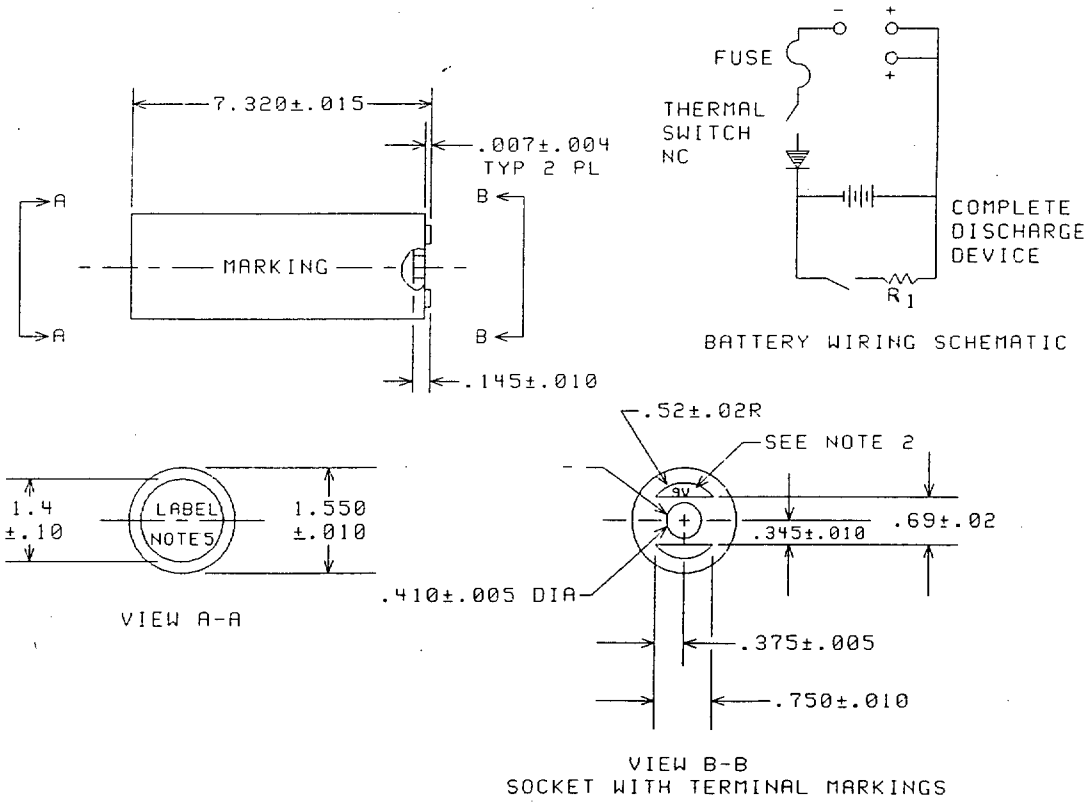


Figure 1. Battery dimensions and wiring schematic.

AMSC N/A FSC 6135

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:05Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.

2. Terminal markings to be printed or embossed on jacket in suitable location near the socket terminals of the battery.

3. The battery case shall be fabricated in such a way as to allow cell venting upon provocation without rupture.

4. The battery terminals shall consist of two raised crescent-shaped (positive) terminals surrounding one central, recessed disc (negative) terminal. All terminals are integral with one end of battery (see Figure 1).

5. Adhesive decal shall be red/orange for field color: Decal markings shall be in black letters (3/32 inch high) "This End Out", "Date Installed".

6. R_1 value shall be between 90 ohms and 130 ohms and have a power rating of 0.5 watt.

REQUIREMENTS:

Dimensions and configuration: See Figure 1.

Maximum voltage: 9.15 volts.

Minimum voltage for capacity: 6.00 volts.

The battery shall contain a 2.25 amperes non-replaceable, slow blow fuse in the negative leg.

The battery shall contain in series a diode to prevent charging. See paragraph 3.5.5.2 of the basic specification.

High temperature switch: A high temperature switch or thermal fuse shall be employed internal to the battery as described in paragraphs 3.5.5 and 3.5.5.1 of the basic specification.

Terminals: Two (2) positive and one (1) negative terminals, all at one end of battery (see note 4).

Weight (maximum): 0.8 pound (363 grams).

Capacity tests: When the battery is tested in accordance with the methods of examination and tests of this specification, the minimum capacity test requirements shall be as specified below:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:05Z
Check the source to verify that this is the current version before use.

Capacity Test	Battery Capacity Requirement in Hours to 6.00 Volts
I	3.2
L	1.8
H	5.4
HT	5.2
LT	1.6
T	2.7
D	2.7

Initial voltage delay: During the I, H, HT, T, and D discharge tests, initial voltages below 5.70 volts cannot exceed a 5.0 second duration. During the L and LT discharge tests initial voltages below 5.70 volts cannot exceed a 60.0 second duration.

METHODS OF EXAMINATION AND TESTS:

Capacity tests:

(1) Storage: Details on storage conditions for all capacity tests are specified in basic specification (see 4.8.9).

(2) Discharge:

Cells: Discharge at 2.0 amperes constant current at $70\pm5^{\circ}F$ for a minimum of 3 hours to 2.00 volts. Continue discharge to zero volts. Then discharge at 1.0 ampere constant current for 6 hours into voltage reversal.

Batteries: For all capacity tests, except the H and HT the batteries shall be discharged at two amperes constant current to zero volts. For the H and HT capacity tests the battery shall be discharged through two amperes constant current for five minutes followed by open circuit for five minutes. This cycle shall be repeated until closed-circuit voltage reaches zero volts.

Closed-circuit voltage test: Load resistance of 8 ohms shall be used. Voltage shall be above 6.00 volts within 5.0 seconds.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodian:
Army - ER

Preparing Activity
Army - ER

(Project Number 6135-A234-08)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:05Z
Check the source to verify that this is the current version before use.