
MILITARY SPECIFICATION SHEET

BATTERY, RECHARGEABLE, SEALED NICKEL CADMIUM BB-503/TAS

This specification sheet is approved for use by the Electronic Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the sealed nickel cadmium rechargeable battery type described herein shall consist of this document and the latest issue in effect of Specification MIL-B-49436(ER).

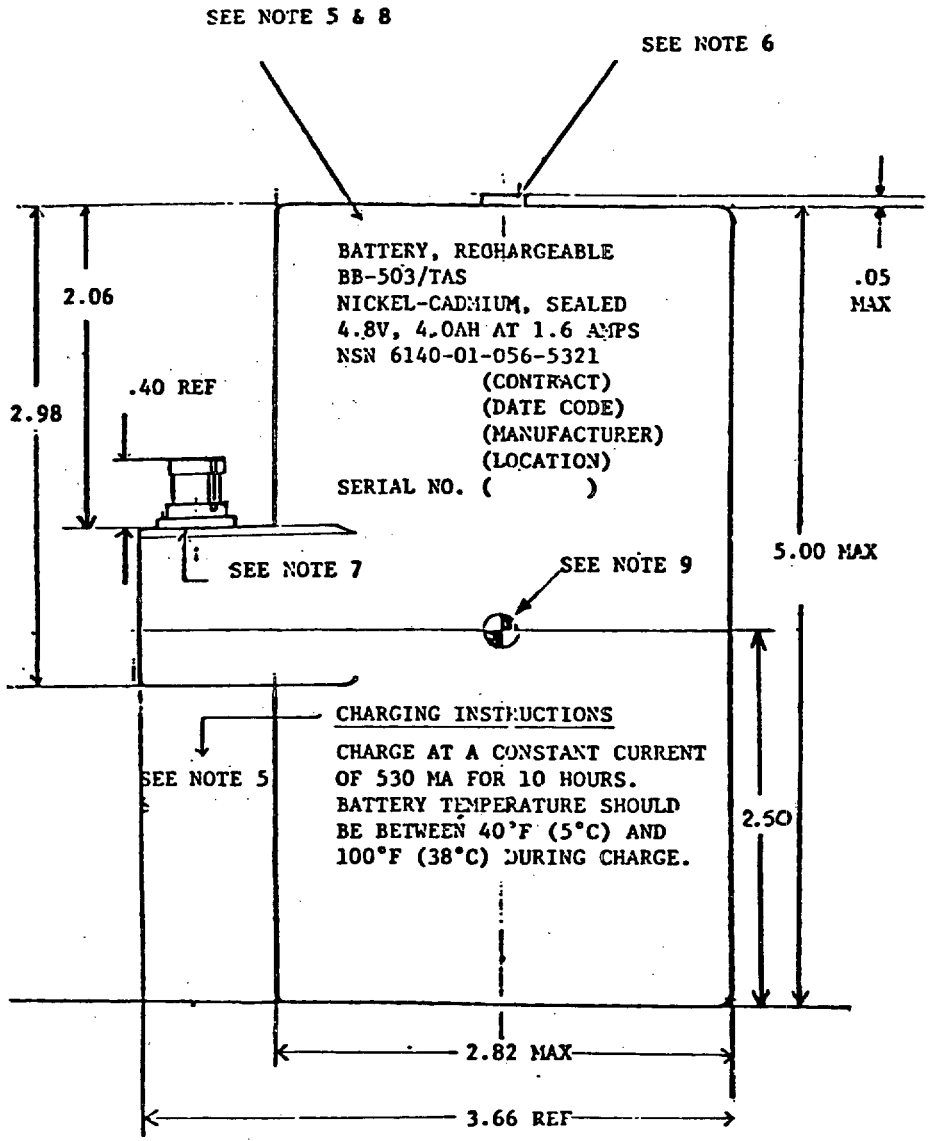

INCHES	MM
.05	1.27
.40	10.16
2.06	52.32
2.82	71.63
2.98	76.69
3.66	92.96
5.00	127.00

FIGURE 1. FRONT VIEW

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

FSC-6140

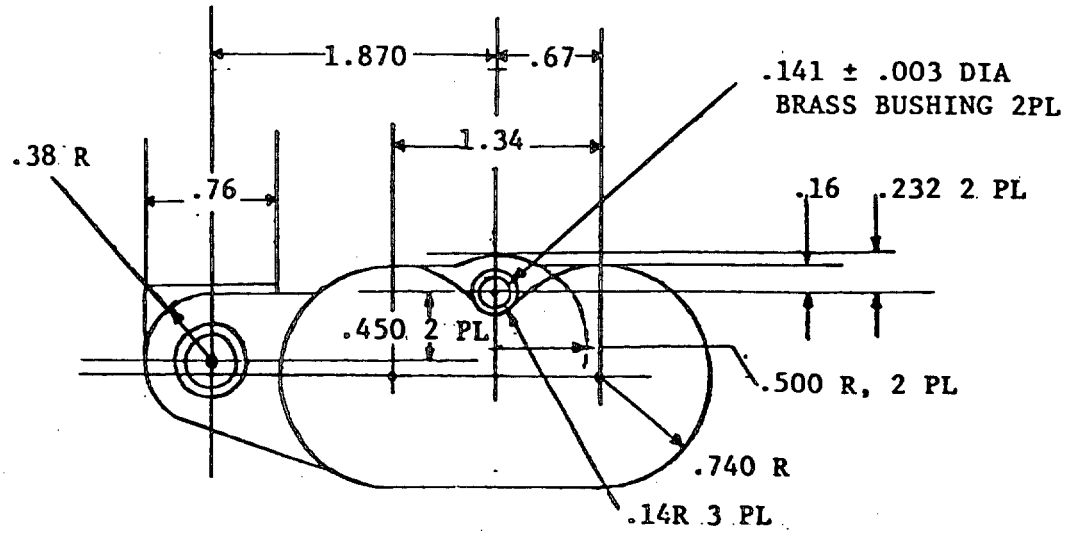


FIGURE 2. TOP VIEW

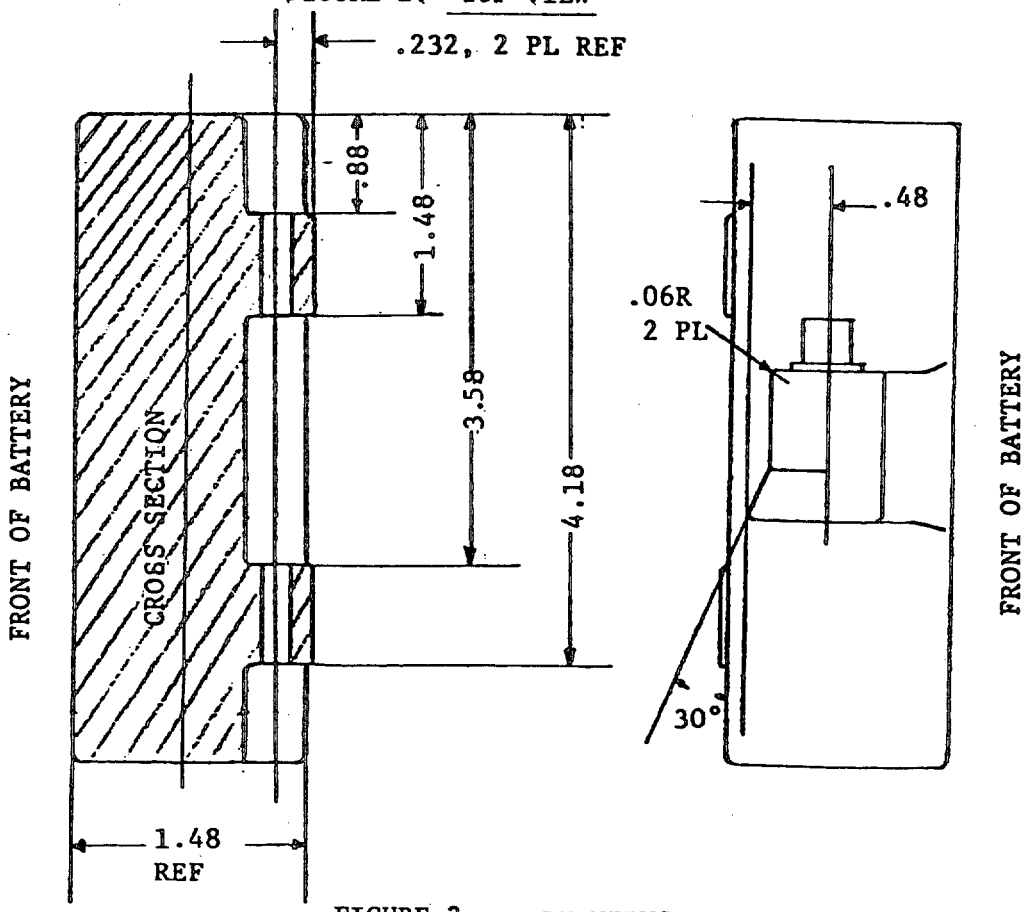


FIGURE 3. SIDE VIEWS

INCHES	MM	INCHES	MM	INCHES	MM
.003	.08	.38	9.65	1.34	34.04
.005	.13	.40	10.16	1.48	37.59
.02	.51	.45	11.43	1.87	47.50
.05	1.27	.46	11.68	2.06	52.32
.06	1.52	.48	12.19	2.50	63.50
.09	2.29	.50	12.70	2.82	71.63
.14	3.56	.67	17.02	2.98	75.70
.141	3.58	.74	18.80	3.58	89.92
.16	4.06	.76	19.30	3.66	92.96
.232	5.89	.88	22.35	4.18	106.17

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

DRAWING NOTES

1. All dimensions in inches.
2. Tolerances on decimals ± .02 for two places
   ± .010 for three places
3. Tolerances on angles ± 1°
4. Dimensioning shall be per USAS-114.5 Y14.5 1966
5. Stencil (or equivalent) identification and charging instructions as shown. Color marking black.
6. Preferred area for pressure relief valve. It shall release gas before case damage is incurred.
7. Push-on co-axial plug connector, part number SM-C-804749. Center Pin is positive, connector body is negative.
8. Manufacturer must fill in applicable information in parenthesis.
9. Denotes the center of gravity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Rated capacity (C_5):	4.0 AH
Voltage (Nominal):	4.8 Volts
Weight (Maximum):	.77 Kg (1.7 lbs)
Connector:	Push-on co-axial plug connector per SM-C-804749
Number and type of cells:	4 sealed "D" size cells or equal in series
Charge rate for testing and on battery (C/7.5 for 10-14 hrs):	530 Amps

Discharge Rates	5 Second Voltage(V)	Final Voltage(V)	Current (Amps)
C/5	-	4.0	.80
.4 C_5	-	4.0	1.60

Test	Discharge Rate	Capacity Requirement(AH)
Full Capacity Discharge	.4 C_5	4.0
Cycle Life , 112 cycles	.4 C_5	3.6
Overcharge , 24 hours	.4 C_5	4.0
High Rate Discharge	Not applicable	-
Low Temperature Discharge at -21°C (-5°F)	.4 C_5	3.2
Retention of Charge 7 days at 51°C (124°F)	.4 C_5	2.0
Pulse Discharge	Not applicable	-
Vibration	C/5	4.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

Mounting screws for connector. Not applicable.

Terminal markings. Not applicable.

Writeable charge history label. Not applicable.

Electrical leakage. Not applicable.

Cycle life test. Except that the electrical leakage portion is not applicable.

CUSTODIAN:
ARMY-ER
ARMY- CR, AV, GL

PREPARING ACTIVITY:
ARMY-ER
(PROJECT 6140-A577-10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.