MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: RECEPTACLE, SOCKET CONTACTS, IN-LINE, FOR PRINTED WIRING BOARDS (.100 INCH CONTACT SPACING) 12, 16, 20, 28, 40, 60, 80, 100, AND 130 CONTACT POSITIONS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-55302.

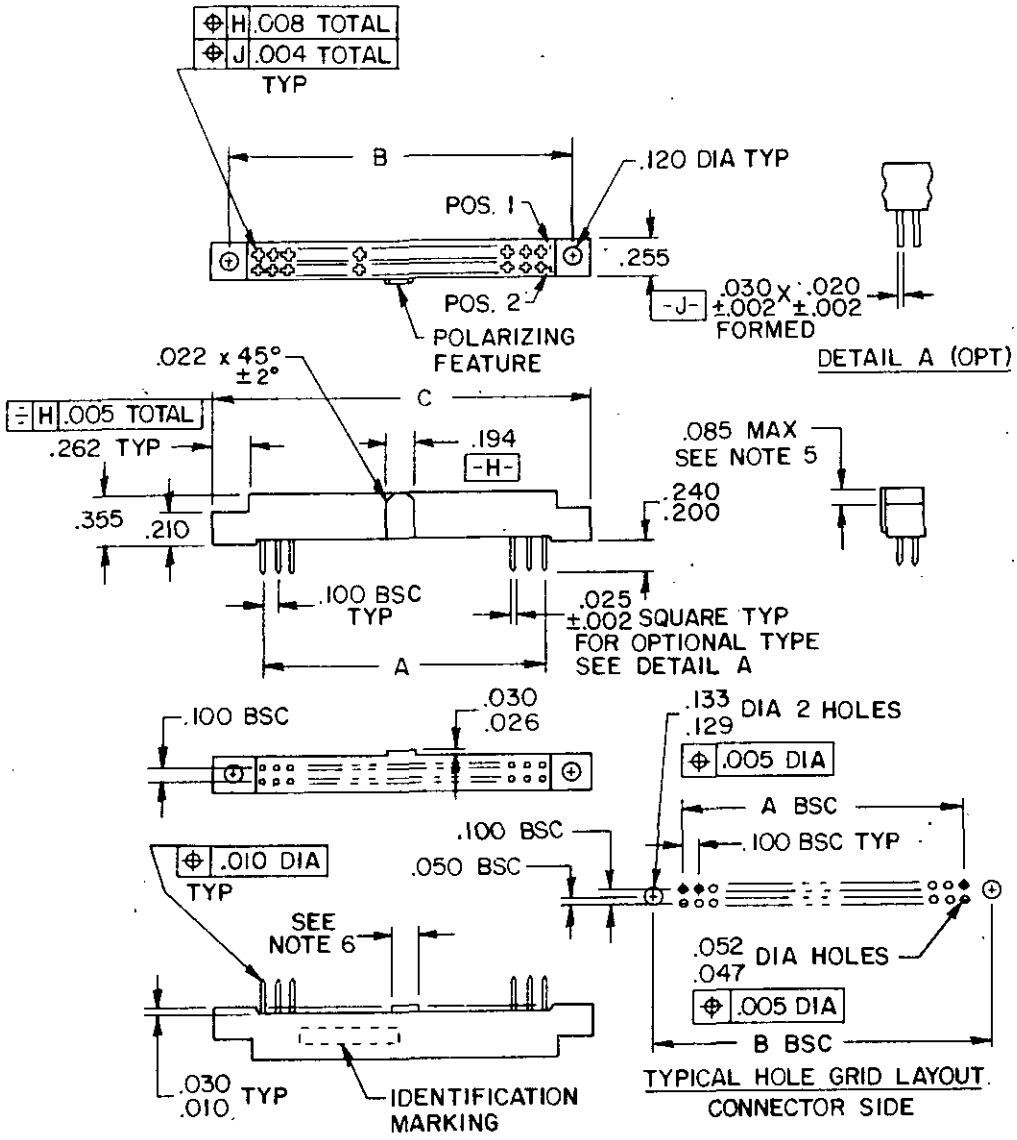


FIGURE 1. Connectors, receptacle (.100 spacing).

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

Dash number	Number of contacts	A REF.	B ±.010	C ±.010
01	12	.500	.900	1.160
02	16	.700	1.100	1.360
03	20	.900	1.300	1.560
04	28	1.300	1.700	1.960
05	40	1.900	2.300	2.560
06	60	2.900	3.300	3.560
07	70	3.400	3.800	4.060
08	80	3.900	4.300	4.560
09	100	4.900	5.300	5.560
10	130	6.400	6.800	7.060

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.002	.05	.052	1.32	.255	6.48	1.700	43.18	4.300	109.22
.004	.10	.085	2.16	.260	6.60	1.900	48.26	4.560	115.82
.006	.15	.100	2.54	.262	6.65	1.960	49.78	4.900	124.46
.008	.20	.120	3.05	.355	9.02	2.300	58.42	5.300	134.62
.010	.25	.129	3.28	.500	12.70	2.560	65.02	5.560	141.22
.020	.51	.133	3.38	.700	17.78	2.900	73.66	6.400	162.56
.022	.56	.150	3.81	.900	22.86	3.300	83.82	6.800	172.72
.025	.64	.194	4.93	1.100	27.94	3.400	86.36	7.060	179.32
.026	.66	.200	5.08	1.160	29.46	3.560	90.42		
.030	.76	.210	5.33	1.300	33.02	3.800	96.52		
.047	1.19	.220	5.59	1.360	34.54	3.900	99.06		
.050	1.27	.240	6.10	1.560	39.62	4.060	103.12		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified tolerance is ±.005 (.13 mm).
4. These connectors mate with connectors specified in MIL-C-55302/135.
5. A point at which an .020 thick by .050 wide gage having a square face touches the socket contact.
6. Pad(s) suitable for printed wiring boards are required. Dimensions and location(s) are optional.

FIGURE 1. Connectors, receptacle (.100 spacing) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and Construction:

Dimensions and configuration: See figure 1.

Material:

Molded plastic insulator: Type GPT-30F per MIL-M-24519.

Socket contact: Phosphor bronze, grade A per QQ-B-750 or QQ-W-321.

Plating: The contact plating in the engaging area for a minimum length of .160 from the front of the mating end of the contact shall be gold per MIL-G-45204, type II, grade C, class 1 over nickel plating per QQ-N-290, class 2, 30 to 150 microinches. The contact plating on the remainder of the contact shall be gold per MIL-G-45204, type II, grade C, five (5) microinches minimum over nickel plating per QQ-N-290, class 2, 30 to 150 microinches.

Contact identification: See figure 1 (position identification relative to polaring feature).

Contact rating: 3 amperes maximum.

Oversized pin exclusion: Not applicable

Probe damage: MIL-STD-1344, method 2006.

Contact size: .020 ±.001 inch thick x .050±.002 inch wide.
Test probe: .0200 ±.0005 inch diameter.
Bending moment: .125 inch pounds.
Depth of insertion: .140 inch minimum.

Separation force: The individual contact withdrawal force shall be .5 ounce minimum when tested with a blade per table VI of MIL-C-55302.

Mating and unmating: The maximum insertion force, in pounds, shall not exceed a value equal to .5 times the number of contacts, and the withdrawal force, in pounds, shall be a minimum of .11 times the number of contacts, and shall not exceed the measured insertion force.

Contact resistance: The average contact resistance of all contacts shall not exceed .010 ohm and no individual contact pair shall have a resistance exceeding .020 ohm.

Contact retention: 3 pounds minimum.

Dielectric withstanding voltage:

Sea level: 600 Vrms
High altitude: 300 Vrms.

Part number: M55302/136-(dash number from figure 1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 17

Review activities:
Army - AR, MI
Navy - AS
Air Force - 11, 99, 85
DLA - ES

User activities:
Army - AT, AV
Navy - MC, OS, SH
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3096-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. *Fold on lines on reverse side, staple in corner*, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of *specification* requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-55302/136

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

HQ. USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

FOLD

HQ, USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID



HQ, USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.