MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: RECEPTACLE, 80 CONTACT POSITIONS, FOR PRINTED WIRING BOARDS (.050 INCH SPACING)

This specification is approved for use by Rome Air Development Center, Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Specification MIL-C-55302.


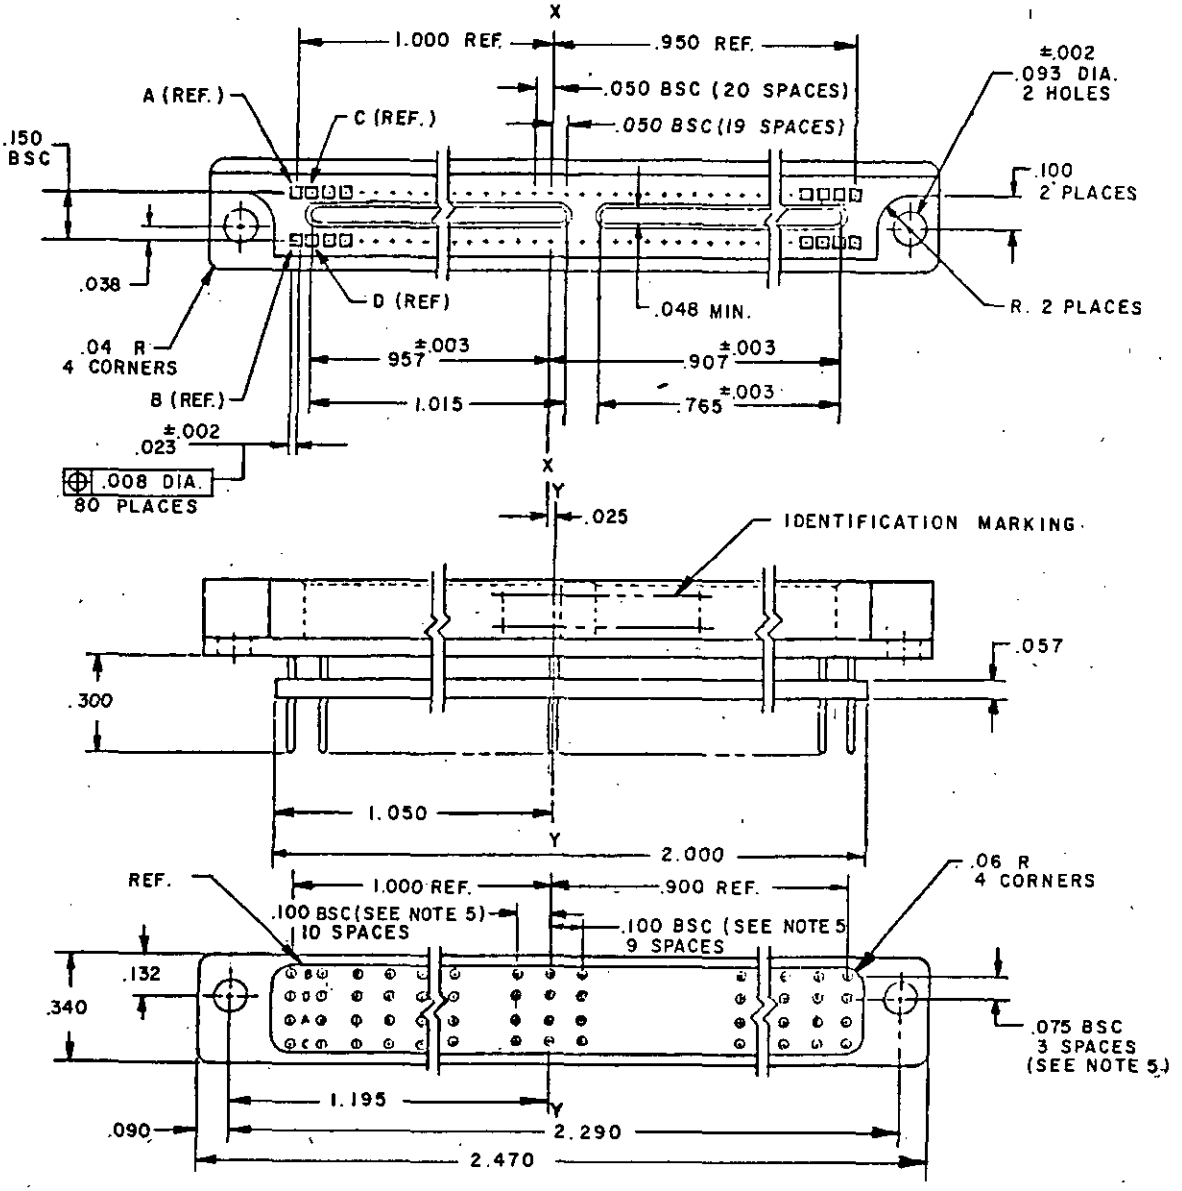


FIGURE 1. Connector, receptacle .050 (1.27 mm) spacing.

Ⓐ denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:51Z
Check the source to verify that this is the current version before use.

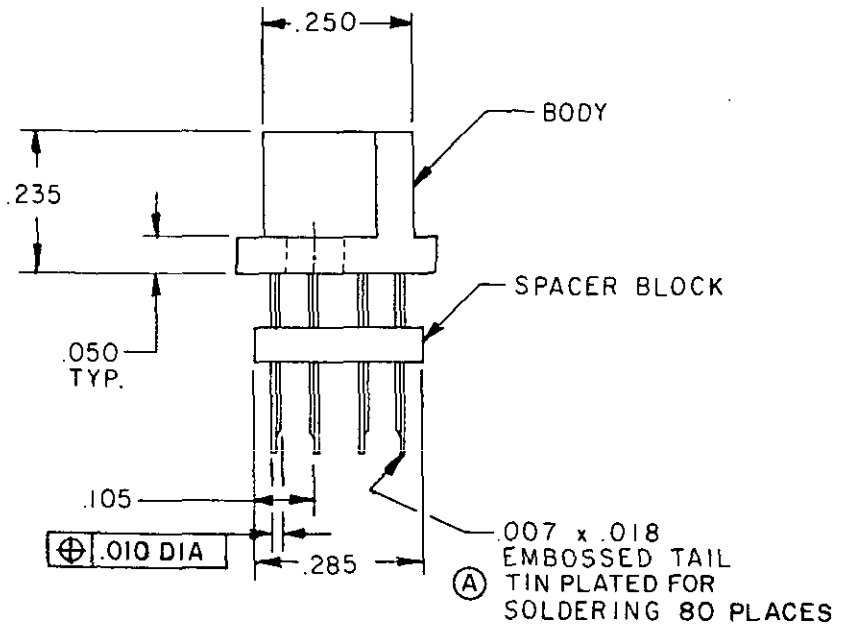

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.002	.05	.048	1.22	.105	2.67	.765	19.43	1.150	29.21
.005	.13	.050	1.27	.132	3.35	.900	22.86	1.195	30.35
.008	.20	.057	1.45	.150	3.81	.907	23.04	2.000	50.80
.010	.25	.060	1.52	.235	5.97	.950	24.13	2.290	58.17
.023	.58	.075	1.90	.250	6.35	.957	24.31	2.470	62.74
.025	.64	.090	2.29	.285	7.24	1.000	25.40		
.038	.97	.093	2.36	.300	7.62	1.015	25.78		
.040	1.02	.100	2.54	.340	8.64	1.050	26.67		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm) on decimals and ±2° on angles.
4. These connectors mate with connectors specified in MIL-C-55302/125.
5. Dimension applies at point of egress from spacer block.

FIGURE 1. Connector, receptacle .050 (1.27 mm) spacing - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:51Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:
Dimensions and configurations: See figure 1.
Material:
Body: Type GPT-30F per MIL-M-24519.
(A) Plating (contact): Gold per MIL-G-45204, type II, grade C, class I over nickel per QQ-N-290, class 2, 30 to 150 microinches on the contact engagement area for .100 inches minimum length. The termination area plating shall be tin lead per MIL-T-10727, class I over nickel per QQ-N-290, class 2, 30 to 150 microinches, for .300 inches minimum length.
(A) Contact identification: See figure 1.
Contact rating: 1.5 amperes per contact, maximum.
Operating temperature: -65° to 125°C.
Keying: See MIL-C-55302/31.

Oversized pin exclusion: .0330 diameter pin.

Mating and unmating: The maximum mating force in pounds shall be the number of contacts multiplied by .30 and the withdrawal force in pounds shall be a minimum of .03 times the number of contacts and shall not exceed the measured insertion force.

Contact engagement and separation force:
Engagement force: Maximum force to engage maximum test pin .0190 inch +.0000, -.0001 diameter shall be 6 ounces.
Separation force: Minimum force to extract minimum test pin .0170 inch +.0001, -.0000 diameter shall be .10 ounces.

Contact resistance: The average contact resistance of all contacts measured shall not exceed .025 ohm, and no individual contact pair shall have resistance exceeding .015 ohm.

(A) Contact retention: .75 pound, minimum.

Dielectric withstanding voltage:
Sea level: 450 volts rms.
High altitude: 150 volts rms.

(A) Solderability: Each connector shall be subjected to method 208 of MIL-STD-202 (Solder termination only) (Applicable to qualification and retention of qualification only).

Part number: M55302/126-01 - (dash number from table I).

Patent number 3,404,367. The Government has a royalty free license under this patent for the benefit of manufacturers of the item either for the Government or for use in equipment to be delivered to the Government.

Custodian:
Air Force - 17

Review activities:
Air Force - 11, 85, 99
DLA - ES

User activity:
Air Force - 19

Preparing activity:
Air Force - 17

Agent:
DLA - ES

(Project 5935-F125-6)

*U.S. GOVERNMENT PRINTING OFFICE: 1980—603-121/1632

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:51Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-55302/126A(USAF)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1426 1 OCT 76 Replaces edition of 1 Jan 72 which may be used. S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:51Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD ~~376~~ XXX 304

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Defense Electronics Supply Center
1507 Wilmington Pike
Dayton OH 45444
ATTN: ESD

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:51Z
Check the source to verify that this is the current version before use.