
|METRIC|
DOD-C-55302/161B(CR)
18 July 1935
SUPERSEDING
DOD-C-55302/161A(CR)
30 July 1982


MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES RECEPTACLE 160 CONTACT POSITIONS FOR PRINTED WIRING BOARDS 2.54 MM X 1.27 MM OFFSET GRID, METRIC

This specification is approved for use by US Army Communications Electronics Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connector described herein shall consist of this specification sheet and the latest issue of MIL-C-55302.

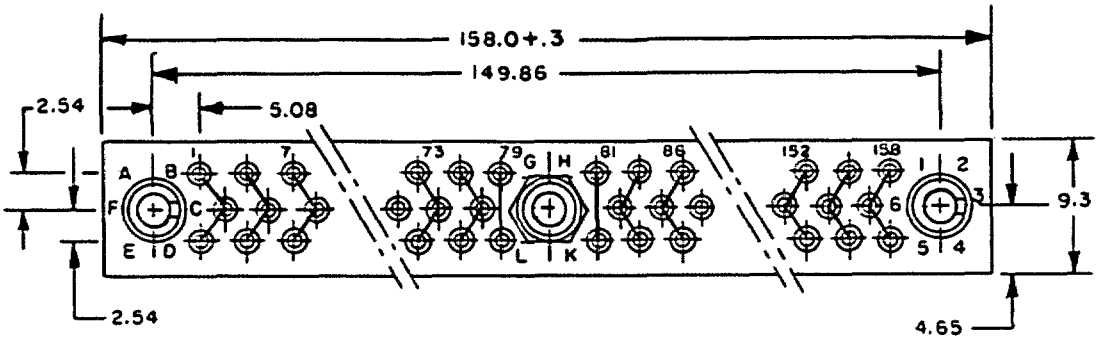

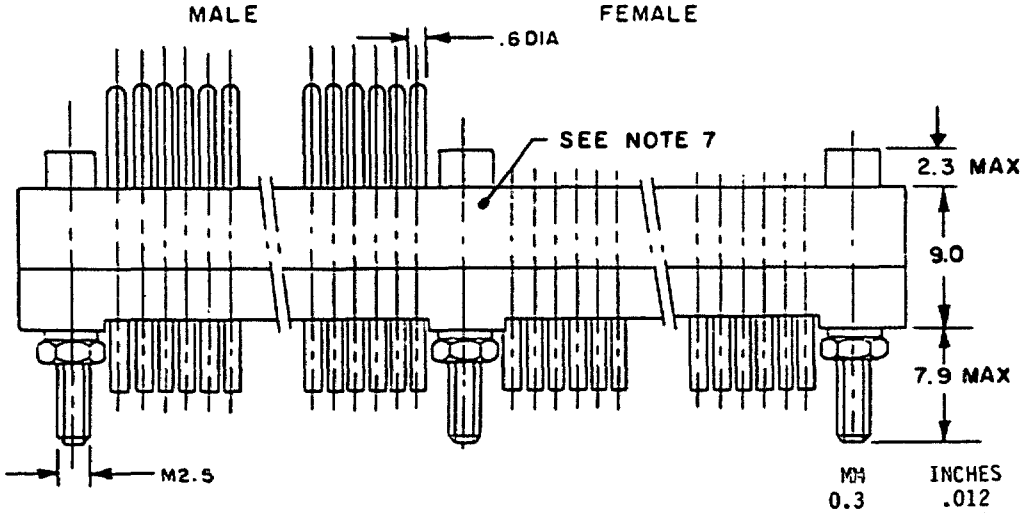

MM	INCHES
0.3	.012
0.6	.023
2.3	.091
2.5	.098
2.54	.100
4.65	.183
5.08	.200
7.9	.311
9.0	.354
9.3	.366
149.86	5.845
158.0	6.220

NOTES:
1. Dimensions are in millimeters.
2. Inch equivalents are given for general information only.


FIGURE 1. Connector receptacle.

Ⓑ denotes changes

FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil - Downloaded: 2026-10-22T22:54:42
Check the source to verify that this is the current version before use.

TERMINAL STYLES

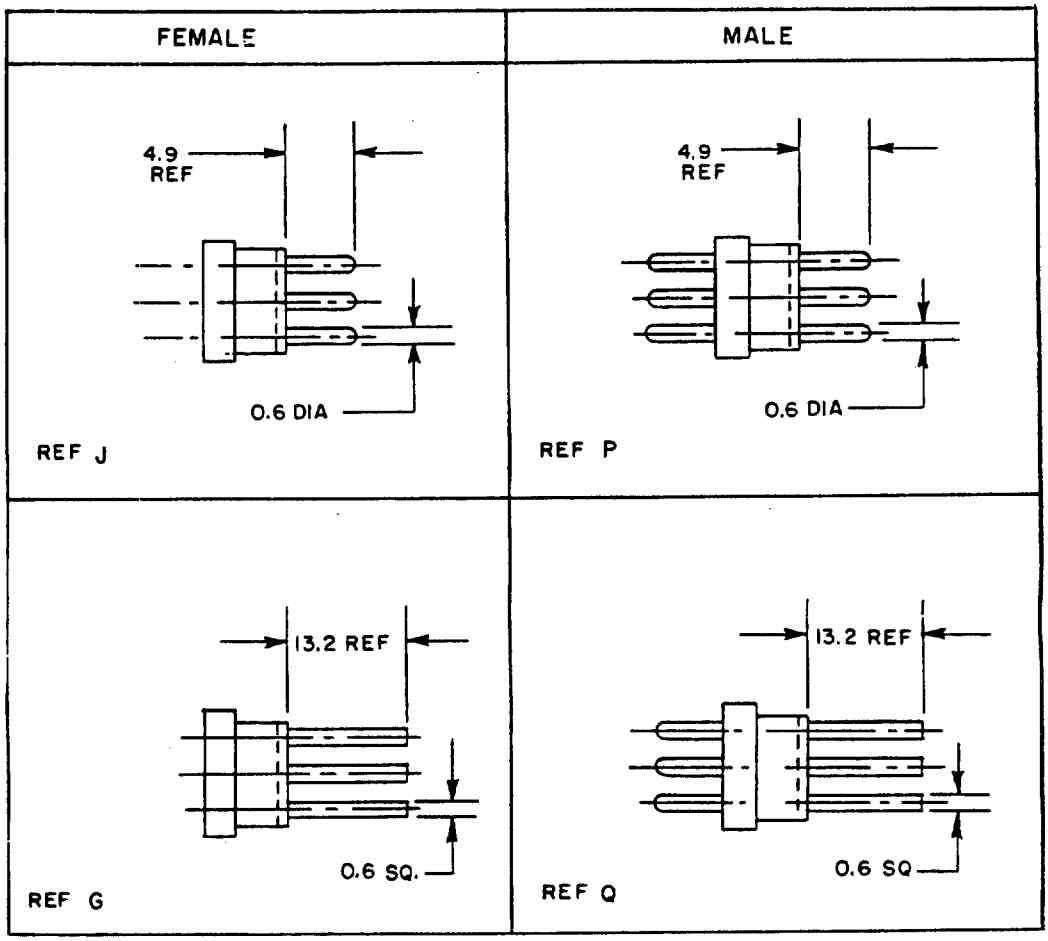

MM	INCHES
0.6	.023
4.9	.193
13.2	.519

NOTES:
1. Dimensions are in millimeters.
2. Inch equivalents are given for general information only.

FIGURE 2. Termination styles.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

TABLE I. MATING REFERENCES

TYPE	WILL ONLY MATE WITH	LOCKING METHOD
B	P,U,W	NONE
F	J,K	PUSH, 1/4 TURN
G	J,K	PUSH, 1/4 TURN
J	F,G	PUSH, 1/4 TURN
K	F,G	PUSH, 1/4 TURN
P	B,T,V	NONE
T	P,U,W	NONE
U	B,T,V	NONE
V	P,U,W	NONE
W	B,T,V	NONE
X	Z	SCREW
Y	Z	SCREW
Z	X,Y	SCREW

NOTES:
1. Dimensions are in millimeters.
2. This is a metric design. Inches are to the closest .001.
3. Unless otherwise specified, tolerance is ±.1 (.004 inch).
4. These connectors mate with DOD-C-55302/164.
5. Inch equivalents are given for general information only.
6. See table for mating.
7. Contact identification may be located adjacent to contact cavity on surface indicated.
8. Insulation bodies are not to be bonded or affixed in any way such that the front removal feature of this assembly would be defeated.

FIGURE 2. Termination styles - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configurations: See figure 1.

Material:

Insulators: Diallyl phthalate per MIL-M-14.

Ⓑ Guides and hardware: Brass per QQ-B-626, nickel plated per QQ-N-290, or A151 303 stainless steel or equivalent per QQ-S-764, passivated per QQ-P-35.

Contact identification: See figure 1.

Ⓑ Contact engagement and separation forces:

Minimum force .5 ounce with a .0220 ±.0001 ø pin.
Maximum force 1.6 ounces with a .0230 ±.0001 ø pin.

Note: Pin roughness to be .25 - 2.5 microns surface.

Mating and unmating: The maximum force shall not exceed 2 ounces (56 grams) multiplied by the number of positions.

Contact retention minimum: 8 pounds (3.6 kg) minimum.

Current rating: 5 amperes per line.

Durability: 2,000 cycles minimum.


Dielectric withstanding voltage:

Sea level: 1400 Vac (rms) test, or equivalent dc voltage (2,000 volts).

Ⓑ High altitude: 300 Vac (rms) test.

Keying: Rotation of guides - 6 positions each, 36 possible combinations.

Connector part number:

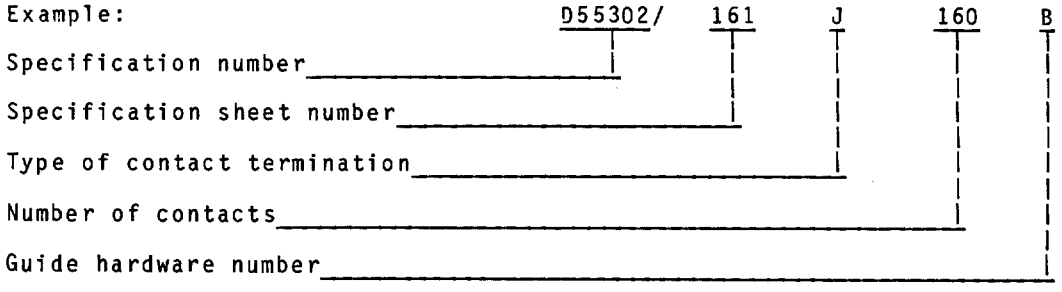

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

Custodian:
Army - CR

Review activities:
Army - AR, MI
DLA - ES

User activities:
Army - ME, AT, AV

Agent:
DLA - ES

Preparing activity:
Army - CR

(Project 5935-A256-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.