

MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, ELECTROLYTIC (SOLID ELECTROLYTE), TANTALUM, POLAR, NONHERMETICALLY SEALED STYLES CX06 AND CX16

This specification sheet is approved for use within the US Army Laboratory Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the capacitors described herein shall consist of this specification and the latest issue of MIL-C-49137.

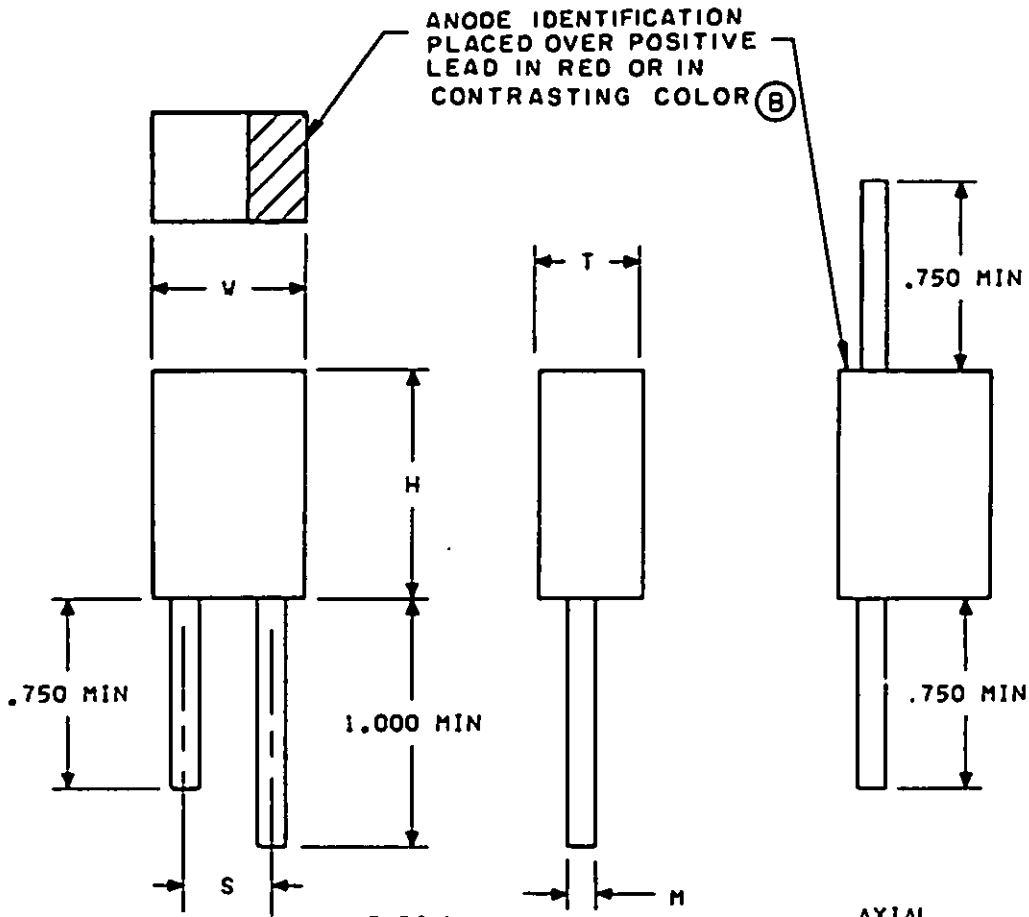



CIRCUIT DIAGRAM

FIGURE 1. Styles CX06 and CX16 capacitors.

(B) denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:50Z
Check the source to verify that this is the current version before use.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Case size	Dimensions Ⓑ				
	T	W	H	M	S
	Max	Max	Max	±.002	
A	.040	.050	.100	.007	.030 ±.015
B	.040	.070	.125	.010	.050 ±.015
C	.070	.120	.165	.010	.100 ±.020
D	.075	.185	.225	.010	.150 ±.020
E	.110	.220	.290	.016	.180 ±.025
F	.130	.230	.310	.016	.200 ±.025
G	.150	.375	.475	.016	.300 ±.025

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.002	0.05	.040	1.02	.130	3.30	.230	5.84
.007	0.18	.050	1.27	.150	3.81	.290	7.37
.010	0.25	.070	1.78	.165	4.19	.300	7.62
.015	0.38	.075	1.90	.180	4.57	.310	7.87
.016	0.41	.100	2.54	.185	4.70	.375	9.52
.020	0.51	.110	2.79	.200	5.08	.475	12.06
.025	0.64	.120	3.05	.220	5.59	.750	19.05
.030	0.76	.125	3.18	.225	5.72	1.000	25.40

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The positive lead on CX06 shall be at least .125 inch (3.18 mm) longer than the negative lead.

FIGURE 1. Styles CX06 and CX16 capacitors - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:50Z
Check the source to verify that this is the current version before use.

TABLE I. Styles CX06 and CX16 characteristics.

Type 1/ designation	DC rated voltage (85°C)	Nominal capacitance	Dissipation factor (max)	DC leakage (max) 25°C	Case size
	Volts	µF	%	µA	
CX-6A474-	2	.47	10	.5	A
CX-6A225-	2	2.2	10	.5	B
CX-6A106-	2	10.0	10	.5	C
CX-6B155-	3	1.5	10	.5	B
CX-6B685-	3	6.8	10	.5	C
CX-6B226-	3	22.0	10	1.0	D
CX-6B227-	3	220.0	15	9.0	G
CX-6C334-	4	.33	10	.5	A
CX-6C105-	4	1.0	8	.5	B
CX-6C475-	4	4.7	8	.5	C
CX-6C156-	4	15.0	8	1.0	D
CX-6C476-	4	47.0	8	2.0	E
CX-6C686-	4	68.0	8	3.0	F
CX-6D224-	6	.22	10	.5	A
CX-6D684-	6	.68	6	.5	B
CX-6D335-	6	3.3	6	.5	C
CX-6D106-	6	10.0	6	1.0	D
CX-6D336-	6	33.0	6	2.0	E
CX-6D476-	6	47.0	6	3.0	F
CX-6D157-	6	150.0	10	9.0	G
CX-6F154-	10	.15	10	.5	A
CX-6F474-	10	.47	6	.5	B
CX-6F225-	10	2.2	6	.5	C
CX-6F685-	10	6.8	6	1.0	D
CX-6F226-	10	22.0	6	2.0	E
CX-6F336-	10	33.0	6	3.0	F
CX-6F107-	10	100.0	8	9.0	G
CX-6H104-	15	.10	10	.5	A
CX-6H334-	15	.33	6	.5	B
CX-6H155-	15	1.5	6	.5	C
CX-6H156-	15	15.0	6	2.0	E
CX-6H226-	15	22.0	6	3.0	F
CX-6H686-	15	68.0	8	9.0	G
CX-6J104-	20	.10	6	.5	B
CX-6J154-	20	.15	6	.5	B
CX-6J224-	20	.22	6	.5	B
CX-6J105-	20	1.0	6	.5	C
CX-6J335-	20	3.3	6	1.0	D
CX-6J475-	20	4.7	6	1.0	D
CX-6J106-	20	10.0	6	2.0	E
CX-6J156-	20	15.0	6	3.0	F
CX-6J476-	20	47.0	8	9.0	G
CX-6K684-	25	.68	6	.5	C
CX-6K225-	25	2.2	6	1.0	D
CX-6K685-	25	6.8	6	2.0	E
CX-6K106-	25	10.0	6	3.0	F
CX-6K336-	25	33.0	6	9.0	G
CX-6M104-	35	.10	6	.5	C
CX-6M154-	35	.15	6	.5	C
CX-6M224-	35	.22	6	.5	C
CX-6M334-	35	.33	6	.5	C
CX-6M474-	35	.47	6	.5	C
CX-6M684-	35	.68	6	1.0	D
CX-6M105-	35	1.0	6	1.0	D
CX-6M155-	35	1.5	6	1.0	D
CX-6M225-	35	2.2	6	2.0	E
CX-6M335-	35	3.3	6	2.0	E
CX-6M475-	35	4.7	6	2.0	E
CX-6M685-	35	6.8	6	3.0	F
CX-6M106-	35	10.0	6	9.0	G
CX-6M156-	35	15.0	6	9.0	G
CX-6M226-	35	22.0	6	9.0	G

1/ Complete type designation will include additional symbols to indicate style and capacitance tolerance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:50Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1.

Case material: Polyester sleeve and epoxy end filled or plastic encapsulated.

Leads: Solder-coated metal.

DC rated voltage: See table I.

Operating temperature: -55°C to +85°C.

DC leakage (DCL): See table I.

Capacitance (cap.): See table I.

Capacitance tolerance: ±10 percent (K) or ±20 percent (M).

Dissipation factor (DF): See table I.

Terminal strength: In accordance with method 211 of MIL-STD-202.

Test condition A: 1/2-pound for case sizes A and B, 1 pound for case sizes C and D, and 2 pounds for case sizes E, F, and G.

Test condition C: 1/2-pound applied force - 3 bends.

Stability at low and high temperature: In accordance with MIL-C-49137.

Step 1 (+25°C):	DCL	-	See table I.
	Cap.	-	Within tolerance specified in table I.
	DF	-	See table I.
Step 2 (-55°C):	ΔCap.	-	Within -15 percent of step 1 measured value.
	DF	-	200 percent of table I.
Step 3 (+25°C):	DCL	-	See table I.
	ΔCap.	-	Within 10 percent of step 1 measured value.
	DF	-	See table I.
Step 4 (+85°C):	DCL	-	10 times 25°C limit (see table I).
	ΔCap.	-	Within +15 percent of step 1 measured value.
	DF	-	150 percent of table I.
Step 5 (+25°C):	DCL	-	See table I.
	ΔCap.	-	Within 10 percent of step 1 measured value.
	DF	-	See table I.

Surge voltage: In accordance with MIL-C-49137.

DCL - See table I.

ΔCap. - Within 10 percent of initial measured value.

DF - See table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:50Z
Check the source to verify that this is the current version before use.

Life: Method 108 of MIL-STD-202.

1,000 hours:

At 25°C: DCL - 200 percent of table I.


ΔCap. - Within 10 percent of initial measured value.

DF - See table I.

Resistance to solvents: Not applicable.

Marking: In accordance with MIL-C-49137, except that case sizes A and B, shall be marked as shown in example 1. The front shall be marked with the capacitance value coded in picofarads and the reverse shall be marked with the dc voltage and the manufacturer's trademark. Case sizes E, F, and G shall be marked as shown in example 3. The first line will contain the part number and the second shall contain the date code (year and week), lot code, and manufacturer's trademark.

At the option of the manufacturer, color coding may be used to mark the capacitance, dc rated voltage, and manufacturer's trademark on case sizes A and B and the use of three lines to mark the date, lot code, and manufacturer's trademark on case sizes E, F, and G, as long as it is the same order as shown in the example.

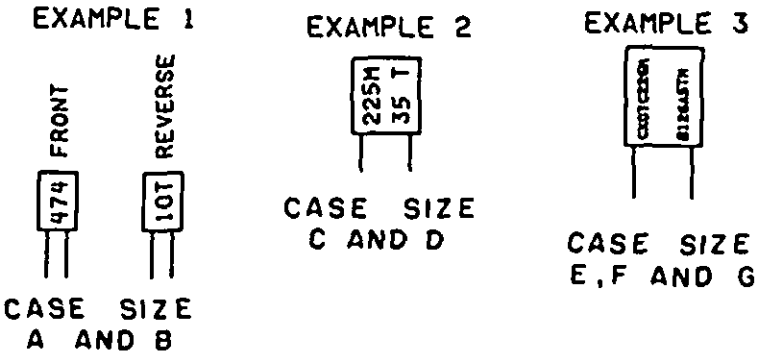

Voltage groups (85°C rated voltage):

I----------2 to 10 V inclusive

II----------15 to 35 V inclusive

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5910-A418)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:50Z
Check the source to verify that this is the current version before use.