NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


MIL-PRF-55339/5
6 May 1975
SUPERSEDING
MS15507A
25 November 1966

PERFORMANCE SPECIFICATION

ADAPTER, CONNECTOR, COAXIAL, RADIO FREQUENCY,
(WITHIN SERIES N), CLASS 2, STRAIGHT PLUG

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the adapter described herein shall consist of this document and the latest issue of Specification MIL-PRF-55339.

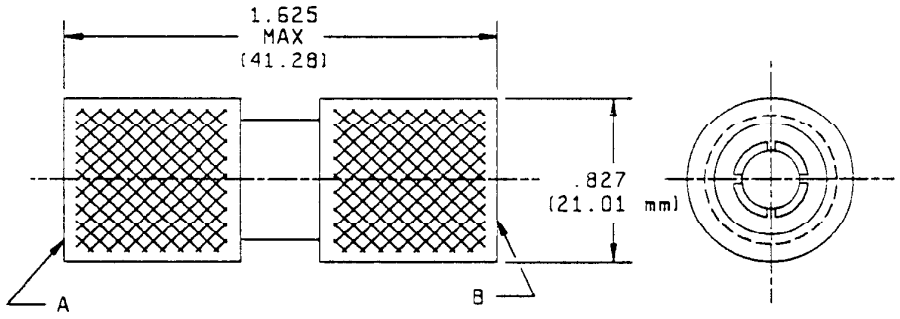


Reference	Series	Contact	Figure
A & B	N	Pin	2


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in parentheses.
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. All undimensioned pictorial representations are for reference purposes only.

FIGURE 1 General configuration.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:04Z
Check the source to verify that this is the current version before use.

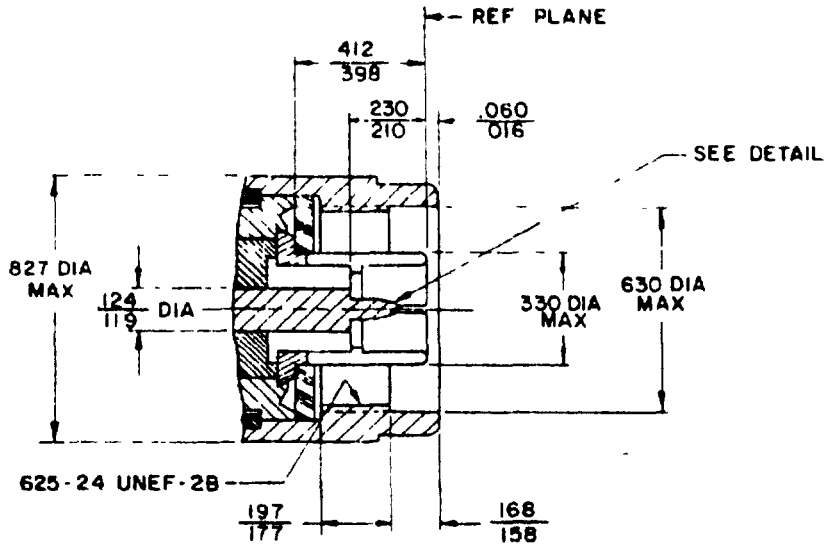

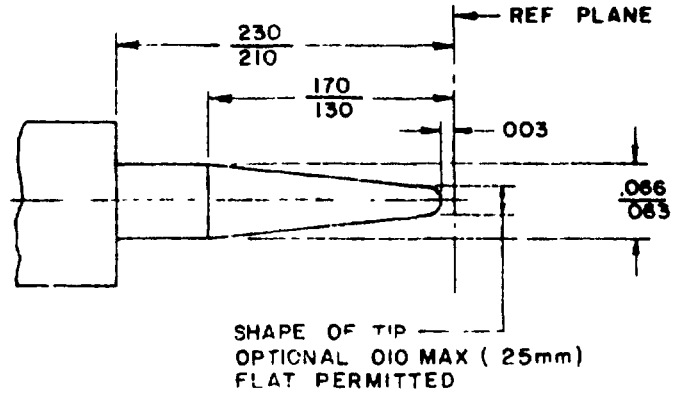

DETAIL

INCHES	MM	INCHES	MM	INCHES	MM
.003	.08	.130	3.30	.230	5.84
.016	.41	158	4.01	.330	8.38
.060	1.52	168	4 27	.398	10.11
.063	1.60	.170	4.32	.412	10.46
.066	1.68	.177	4.50	.625	15.88
.119	3 02	.197	5.00	.630	16.00
.124	3.15	.210	5.33	.827	21.01

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Three holes .027 (.69 mm) minimum diameter, equally spaced, are required for safety wiring after mating. Location on coupling nut optional.
4. All undimensioned pictorial representations are for reference purposes only.
5. Outer contact shall have a minimum of four slots.

FIGURE 2. Mating dimensions for pin contact terminations.

Source: https://assist.dla.mil -- Downloaded: 202640-22T23:04Z
Check the source to verify that this is the current version before use.

DESIGN AND CONSTRUCTION:

General configuration: See figure 1.

Impedance: 50 ohms, nom.

Working voltage: Sea level - 1,000 Vrms.
70,000 feet - 250 Vrms.

Frequency range: 0 to 11 GHz.

Temperature range: -65° to +165°C.

PERFORMANCE (installation torque of 6 to 10 in. lb).

Dimensions: See figures 1 and 2.

Center contact retention: Axial force - 6 lb, min.
Torque - Not applicable.

Force to engage and disengage: Longitudinal force - Not applicable.
Torque - 6 in. lb, max.

Coupling proof torque: 15 in. lb, min.

Mating characteristics:
Center contact (socket): Not applicable.
Outer contact:
Min test ring ID - .316 in., max.
Ring finish - 16 microinches.
Insertion force - 25 lb, max.
Insertion depth - .093 in., min.
No. of insertions - 1.
Max test ring ID - .324 in., min.
Test ring finish - 16 microinches.
Insertion depth - .031 in., max.
No. of insertions - 1.

Permeability: <2.0.

Seal: Hermetic - Not applicable.
Pressurized - Not applicable.
Weatherproof - Not applicable.

Insulation resistance: 5,000 megohms, min.

VSWR: 1.30, max at .5 to 9 GHz.

RF leakage (total): -90 dB, min, 2 to 3 GHz.

RF insertion loss: .15 dB, max, 9 GHz
(.050 $\sqrt{F\ (GHz)}$ dB max tested at 9 GHz).

Durability: 500, min.
Rate: 12 c/m, min.

Dielectric withstanding: Test voltage - 2,500 Vrms, min (sea level).

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:04Z
Check the source to verify that this is the current version before use.

Contact resistance (milliohms, max):

Contact	Initial	After
Center	1.5	2.0
Outer	0.3	N/A

Vibration, high frequency: Interruptions - 1 µs, max.

Shock: Test condition I.

Thermal shock: Test condition C.

Moisture resistance: 200 megohms, min.

Corona level: Voltage - 500 V, min.
Altitude - 70,000 feet, min.

RF high potential withstanding voltage: RF voltage - 1,500 Vrms, min.
Frequency - 5 MHz, min.

Salt spray (corrosion): Applicable.

Coupling mechanism retention force: 100 lb, min.

MARKING: As specified in MIL-A-55339.
Part No. M55339/05-00057.

TABLE I. Cross reference of part numbers.

Part number	Superseded part number or type designation 1/
M55339/05-00057	MS15507 UG-57B/U

1/ The superseded part number or the type designation is for cross reference only. Where a superseded part number or type designation is not given, none was assigned or will be assigned. The part number M55339/05-00057 shall be used in all cases for marking and identifying the adapter.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - MU, MI, EL
Navy - SH
Air Force - 11, 80
DSA - ES

User activities:
Army - AT
Navy - AS, MC
Air Force - 19

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5935-1918-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:04Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5 PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:04Z
Check the source to verify that this is the current version before use.