INCH-POUND


MIL-DTL-3628/249
20 February 2009

DETAIL SPECIFICATION SHEET

BADGE, RECRUITING AND RETENTION, ARMY NATIONAL GUARD

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

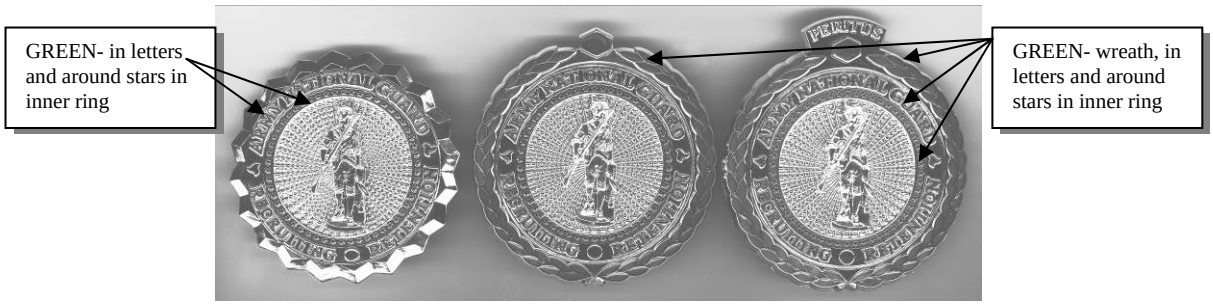

BASIC SENIOR EXPERT

DASH NO:
-1: Basic
-2: Senior
-3: Expert

MATERIAL: Gilding Metal or Red Brass

FINISH:
-1: Nickel Plated Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16. Enamel/Epoxy (TIOH) color chip #11 Transparent Green.
-2, -3: Base Plate and Minute Man Device, 24K Gold Plated, Mirror-like Polished and shall match (TIOH) Metal Finish Chip Number 6.

Designation Plate, Nickel Plated Mirror-like Polished and shall match (TIOH) Metal Finish Chip Number 16. Enamel/Epoxy (TIOH) Color Chip #11 Transparent Green.

DIMENSIONS:

HEIGHT (overall):
-1: 2-5/16 inch circumscribed (REF)
-2: 2-9/16 inch (REF)
-3: 2-11/16 inch (REF)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:22Z
Check the source to verify that this is the current version before use.

WIDTH (overall):
-1: 2-5/16 inches circumscribed (REF)
-2,-3: 2-1/2 inches (REF)

THICKNESS (at thickest point):
-1: 0.190 ± 0.01 inch
-2,-3: 0.260 ± 0.01 inch

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Attaching device shall be prong and flat ball clutch type. For -1: three prongs shall be located on the reverse two at the top on a horizontal plane 1-11/16 ± 1/32 inches apart and one prong in base centered vertically between the top two 1-1/2 ± 1/32 inches below. For -2,-3: three prongs shall be located on the reverse one at the top in the center, and two 1-1/2 ± 1/32 inches below on a horizontal plane 1-7/16 ± 1/32 inches apart.

3. These badges may be manufactured with a dull, flat black enamel finish and shall match FED-STD-595, Chip Number 37038 or TIOH Metal Finish Chip #21 Dull Flat Black.

4. A forcer maybe used to bring up the detailing in the base plates and the designation plate.

5. Enameled/epoxied areas shall be transparent green. The color shall conform to TIOH Hard Enamel Color Chip Number 11. When hard enamel is used, the material requirement shall be gilding metal. When epoxy is used, the material requirement shall be gilding metal or red brass.

6. At the option of the manufacturer for commercial sale only, for -2, -3 the Base Plate and Minute Man Device may be manufactured using 22 karat gold plate mirror-like polish to match TIOH Metal Chip Number 9.

Custodian:
Army - IH

Preparing activity:
Army - IH
(Project No. 8455-2009-050)

Review activities:
DLA – CT

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:22Z
Check the source to verify that this is the current version before use.