NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/249B
30 June 2020
SUPERSEDING
MIL-DTL-3628/249A
3 September 2015

DETAIL SPECIFICATION SHEET

BADGE, RECRUITING AND RETENTION, ARMY NATIONAL GUARD

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

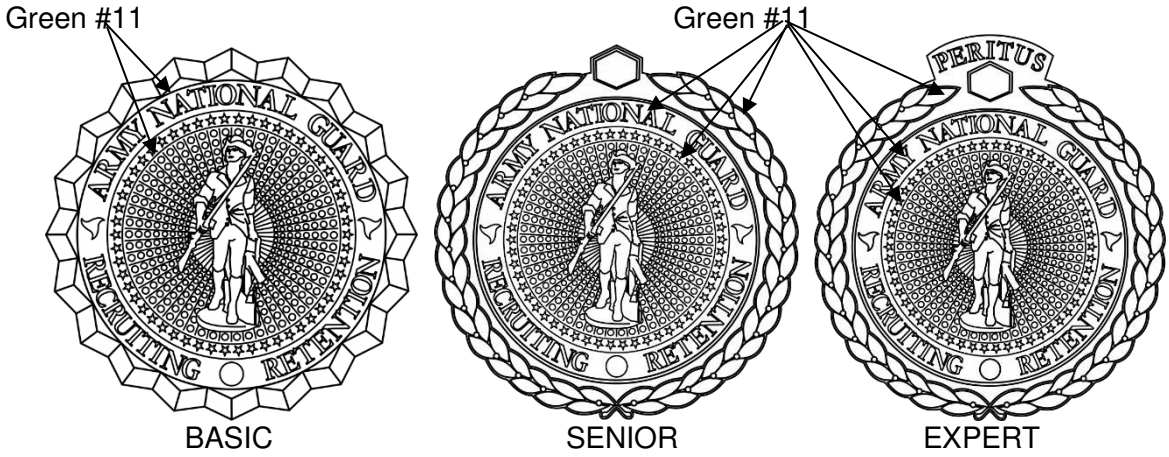

BASIC SENIOR EXPERT

DASH NO:
-1: Basic
-2: Senior
-3: Expert

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:

-1: Base Plate and Minute Man Device Nickel Plated Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16. Epoxy resin (TIOH) Color Chip #11 Transparent Green.

-2, -3: Base Plate and Minute Man Device, 24K Gold Plated, Mirror-like Polished and shall Match (TIOH) Metal Finish Chip Number 6.

Designation Plate: Nickel Plated Mirror-like Polished and shall match (TIOH) Metal Finish Chip Number 16. Epoxy resin (TIOH) Color Chip #11 Transparent Green.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:21Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
HEIGHT (Overall):
-1: 2-5/16 inch circumscribed (REF)
-2: 2-9/16 inch (REF)
-3: 2-11/16 inch (REF)
WIDTH (Overall):
-1: 2-5/16 inches circumscribed (REF)
-2,-3: 2-1/2 inches (REF)
THICKNESS (At thickest point):
-1: 0.190 ± 0.01 inch
-2,-3: 0.260 ± 0.01 inch

ATTACHING DEVICE:
1. Attaching device shall be prong and flat ball clutch type.

2. For -1: three prongs shall be located on the reverse two at the top on a horizontal plane 1-11/16 ± 1/32 inches apart and one prong in base centered vertically between the top two 1-1/2 ± 1/32 inches below.

3. For -2,-3: three prongs shall be located on the reverse one at the top in the center, and two 1-1/2 ± 1/32 inches below on a horizontal plane 1-7/16 ± 1/32 inches apart.

EPOXY: Epoxy resin shall be applied to the Badge Identification as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below. Hard cloisonné enamel may be used in lieu of epoxy.

COLOR	CHIP NUMBER
Green	#11

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Service year markers (5, 10, 15, 20, 25, 30) may be used on the senior and expert badge. They shall be stamped on the lozenge and 24K Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

3. These badges may be manufactured with a dull, flat black enamel finish and shall match TIOH Metal Finish Chip #21 Dull Flat Black.

4. A forcer maybe used to bring up the detailing in the base plates and the designation plate.

5. At the option of the manufacturer for commercial sale only, for -2, -3 the Base Plate and Minute Man Device may be manufactured using 22 karat gold plate mirror-like polish to match TIOH Metal Chip Number 9.

6. If hard cloisonné enamel is used, the base material must be Gilding Metal 95/5 (UNS Alloy No. C-210).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:21Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2020-382)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:21Z
Check the source to verify that this is the current version before use.