NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/249C(IH)
19 February 2026
SUPERSEDING
MIL-DTL-3628/249B(IH)
30 June 2020

DETAIL SPECIFICATION SHEET

BADGE, RECRUITING AND RETENTION, ARMY NATIONAL GUARD

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

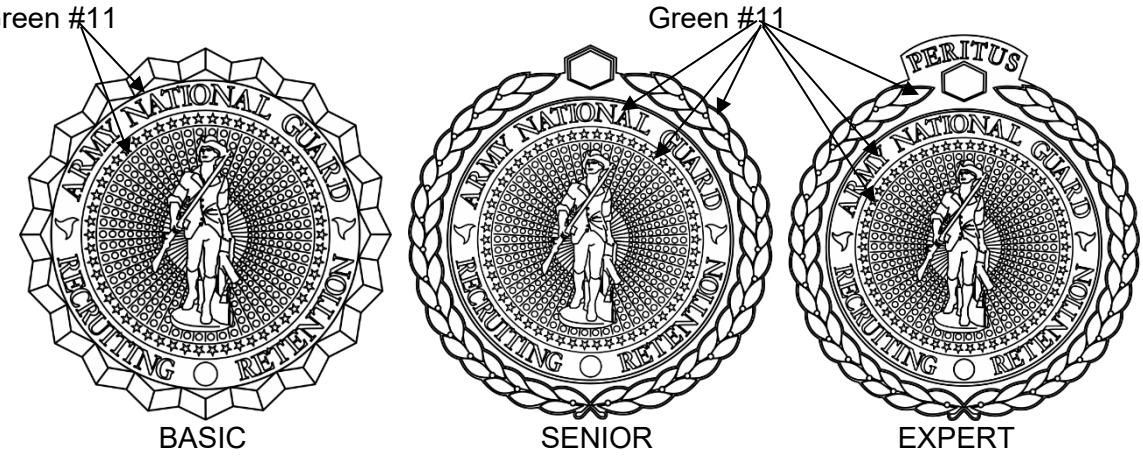

BASIC SENIOR EXPERT

DASH NO:
-1: Basic
2: Senior
-3: Expert

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:

-1: Base Plate and Minute Man Device Nickel Plated Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16. Epoxy resin (TIOH) Color Chip #11 Transparent Green.

-2, -3: Base Plate and Minute Man Device, 24K Gold Plated, Mirror-like Polished and shall Match (TIOH) Metal Finish Chip Number 6.

Designation Plate: Nickel Plated Mirror-like Polished and shall match (TIOH) Metal Finish Chip Number 16. Epoxy resin (TIOH) Color Chip #11 Transparent Green.

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:21Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
HEIGHT (Overall):
-1: 2-5/16 inch circumscribed (REF)
-2: 2-9/16 inch (REF)
-3: 2-11/16 inch (REF)
WIDTH (Overall):
-1: 2-5/16 inches circumscribed (REF)
-2,-3: 2-1/2 inches (REF)
THICKNESS (At thickest point):
-1: 0.190 ± 0.010 inch
-2,-3: 0.260 ± 0.10 inch

ATTACHING DEVICE:
1. Attaching device shall be prong and wing clutch type.

2. For -1: three prongs shall be located on the reverse two at the top on a horizontal plane 1-11/16 ± 1/32 inches apart and one prong in base centered vertically between the top two 1-1/2 ± 1/32 inches below.

3. For -2,-3: three prongs shall be located on the reverse one at the top in the center, and two 1-1/2 ± 1/32 inches below on a horizontal plane 1-7/16 ± 1/32 inches apart.

EPOXY: Epoxy resin shall be applied to the Badge Identification as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below. Hard cloisonné enamel may be used in lieu of epoxy.

COLOR	CHIP NUMBER
Green	#11

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Service year markers (5, 10, 15, 20, 25, 30) may be used on the senior and expert badge. They shall be stamped on the lozenge and 24K Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

3. These badges may be manufactured with a dull, flat black enamel finish and shall match TIOH Metal Finish Chip #21 Dull Flat Black.

4. A forcer maybe used to bring up the detailing in the base plates and the designation plate.

5. At the option of the manufacturer for commercial sale only, for -2, -3 the Base Plate and Minute Man Device may be manufactured using 22 karat gold plate mirror-like polish to match TIOH Metal Chip Number 9.

6. If hard cloisonné enamel is used, the base material must be Gilding Metal 95/5 (UNS Alloy No. C-210).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:21Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2026-092)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:21Z
Check the source to verify that this is the current version before use.