INCH-POUND


MIL-DTL-3628/257A
6 April 2016
SUPERSEDING
MIL-DTL-3628/257
9 June 2011

DETAIL SPECIFICATION SHEET


BADGE, FIELD MEDICAL READINESS AND INSIGNIA, COLLAR, U. S. PUBLIC HEALTH SERVICE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.



CAP BADGE, BASE

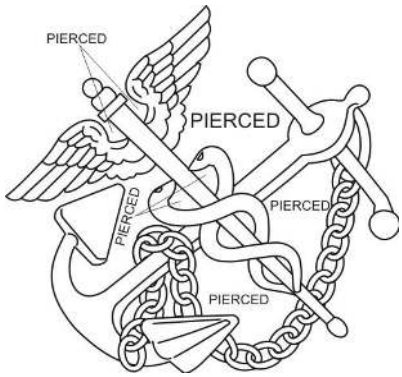

CAP BADGE, DEVICE



CAP BADGE, ASSEMBLED

DASH NUMBERS:
-1 Badge, Base, Regular Size
-2 Badge, Base, Miniature Size
-3 Badge, Device, Regular Size
-4 Badge, Device, Miniature Size
-5 Badge, Assembled, Regular Size
-6 Badge, Assembled, Miniature Size

MATERIAL: (-1 through -6): Red Brass 85/15 (UNS Alloy C-230)

FINISH: (-1 through-4): 24K Gold Plated, Mirror-like Polished, and shall match The Institute of Heraldry Metal Finish Chip Number 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:23Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

HEIGHT (Overall)

-1: 1-5/8 inch (REF)

-2: 15/16 inch (REF)

-3: 2-1/32 inch (REF)

-4: 1-3/16 inch (REF)

-5: 2-9/32 inch (REF)

-6: 1-5/16 inch (REF)

WIDTH (Overall)

-1: 2-1/16 inch (REF)

-2: 1-3/16 inch (REF)

-3: 2-15/32 inch (REF)

-4: 1-7/16 inch (REF)

-5: 2-15/32 inch (REF)

-6: 1-7/16 inch (REF)

THICKNESS:

-1 (Along center line of anchor): 0.090 inch ± 0.005 inch

-2 (Along thickets point of anchor): 0.066 inch ± 0.005 inch

-3 (Along bottom line of the shield's chief): 0.155 inch ± 0.005 inch

-4 (At thickets point of eagle's breast): 0.110 inch ± 0.005 inch

-5 (Along bottom line of shield's chief): 0.245 inch ± 0.010 inch

-6 (Along bottom line of shield's chief): 0.150 inch ± 0.010 inch

ATTACHING DEVICE:

1. For -5: Two screw post shall be required. Two knurled thumb nuts of ½ inch diameter and one two prong lock washer of 3/8 inch diameter shall be required. The screw posts and nuts shall be properly sized to accommodate each other. The screw posts shall be brass material with a gold-like finish. A screw post 9/32+ 1/32 inch – 0 in length shall be either hard soldered or electronically fused to the middle of the back side of the device's shield, and Caduceus and secured with the pronged lock washer and thumb nut. An additional screw post 13/32 inch + 1/32 inch – 0 inch in length shall be either hard soldered or electronically fused to the back side of the eagle's body on the device and fitted with a thumb nut. The measurement between the center of the screw post shall be 1/18 inches ± 1/32 inches.

2. For -6 Two prongs, each 5/16 inch + 0 – 1/32 inch in length, with wing-type clutch fasteners shall be required. The prongs shall be either hard soldered or electronically fused to the top of the back side of the base, with one prong behind the anchor and the other behind the Caduceus. The prong behind the anchor shall be positioned 1/4 inch ± 1/64 inch from the anchor's top ring, measured diagonally along the shaft of the anchor. The prong behind the Caduceus shall be positioned 1/4 inch + 0 – 1/64 inch from the ball atop the Caduceus, measured diagonally along the staff. The measurement between the prongs shall be 29/32 inch + 1/64 inch – 1/32 inch.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Piercings shall be as indicated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:23Z
Check the source to verify that this is the current version before use.

3. For -1 through -4 the manufacturer may deviate from MIL-DTL 3628 by using nickel under plating prior to applying the requisite 24K gold plating.

4. The regular size badge shall require the use of partial forcer on the shield of the base and a full forcer on the device. For the miniature size badge, a partial forcer may be used on the shield of the device at the discretion of the manufacturer.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

Civil agency:
HHS - CCFM

(Project No. 8455-2016-400)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:23Z
Check the source to verify that this is the current version before use.