NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/257D(IH)
13 December 2024
SUPERSEDING
MIL-DTL-3628/257C(IH)
10 February 2020

DETAIL SPECIFICATION SHEET


BADGE, FIELD MEDICAL READINESS, U. S. PUBLIC HEALTH SERVICE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

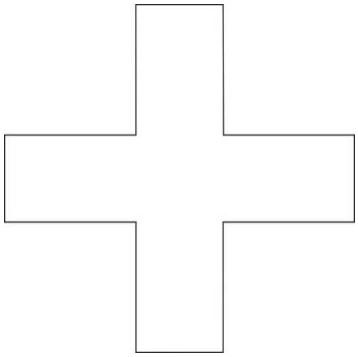

BADGE, BASE

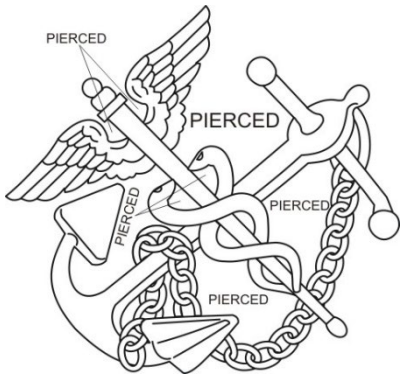

BADGE, DEVICE



BADGE, ASSEMBLED

DASH NUMBERS:
-1: Badge, Base, Regular Size
-2: Badge, Base, Miniature Size
-3: Badge, Device, Regular Size
-4: Badge, Device, Miniature Size
-5: Badge, Assembled, Regular Size
-6: Badge, Assembled, Miniature Size

MATERIAL: (-1 through -6): Red Brass 85/15 (UNS Alloy C-230)

FINISH: (-1 through-4): 24K Gold Plated, Mirror-like Polished, and shall match The Institute of Heraldry Metal Finish Chip Number 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:23Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

HEIGHT (Overall) and WIDTH (Overall):

-1,-5: 1 inch (REF)

-2, -6: 3/4 inch (REF)

-3: 23/32 inch (REF)

-4: 19/32 inch (REF)

THICKNESS:

-1,-2: (At center): 0.053 inch ± 0.005 inch

-3: (Along staff of caduceus): 0.053 inch ± 0.005 inch

-4 (Along staff of caduceus): 0.050 inch ± 0.005 inch

-5 (Where wing meet staff of caduceus): 0.106 inch ± 0.010 inch

-6 (Along staff of caduceus): 0.103 inch ± 0.010 inch

ATTACHING DEVICE:

1. Attaching device shall be prong and wing clutch type.

2. For Regular Size Two prongs, shall be position on the vertical center line center line 1/16 inch ± 1/64 from the top and bottom of the base, and shall be 3/4 inch ± apart ± 1/32 and for Miniature Size Two prongs, shall be position on the vertical center line center line 1/32 inch ± 0.008 from the top and bottom of the base, and shall be 5/8 inch apart ± 1/64.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Piercing for -3, and -4 shall be as indicated above.

3. The badge shall be constructed as follows:

a. The base and device pieces shall be secured by two rivets in a location to correctly position the device to the base as indicated above.

b. The rivets may be an integral part of the device or fabricated from any type of brass or soldered to the reverse of the device.

c. Rivets shall be securely peened or swaged to ensure a tight and close fit between the base and device.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:23Z
Check the source to verify that this is the current version before use.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2025-034)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:23Z
Check the source to verify that this is the current version before use.