NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/259C(NU)
20 May 2026
SUPERSEDING
MIL-DTL-3628/259B(NU)
8 December 2022


DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, COMMAND-AT-SEA, CHIEF ENGINEER, MILITARY SEALIFT COMMAND, U.S. NAVY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

Piercings are to be made for manufacture of -1 only.

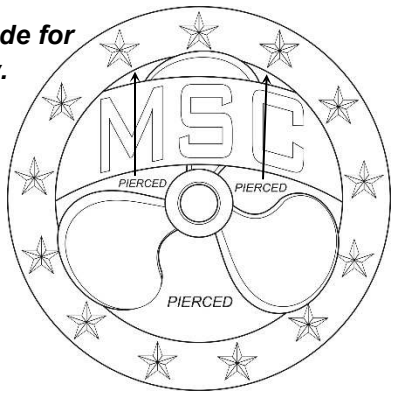

DASH NUMBER:
-1 Dress Size Badge
-2 Regular Size Badge

MATERIAL (-1 and -2): Red Brass (UNS Alloy No. C-230)

FINISH (-1 and -2): 24K Gold Plated, Matte Finish, Polished Highlights and shall match The Institute of Heraldry Standard Metal Finish Chip Number 8.

DIMENSIONS:
DIAMETER:
-1: 1-1/2 inches (REF)
-2: 3/4 inch (REF)
THICKNESS (across scroll):
-1: 0.115 inch ± 0.010 inch
-2: 0.078 inch ± 0.005 inch

PIERCING: Piercings shall be made where indicated above for the manufacture of -1 only. -2 shall not be pierced.

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:24Z
Check the source to verify that this is the current version before use.

ATTACHING DEVICE:

-1: Attaching device shall be prong and wing-grip clutch type with three prongs. Each prong shall have an overall length of 5/16 inch + 1/8 inch - 0 and be either fused or hard soldered to the badge. The two prongs at the top of the badge shall be located along the outer band, 34° ± 1° above the horizontal center line, and positioned 1/16 inch + 1/32 inch - 0 from the edge of the badge. The single prong at the bottom of the badge shall also be located on the outer band along the vertical center line, dissecting the two prongs at top. The bottom prong shall be positioned 1/16 inch + 1/32 inch - 0 from the edge of the badge.

-2: Attaching device shall be prong and wing-grip clutch type with two prongs. Each prong shall have an overall length of 5/16 inch + 1/8 inch - 0 and be either fused or hard soldered to the badge. The prongs shall be located along either the horizontal or vertical center lines. The prongs shall be positioned at least 1/16 inch + 0 - 1/32 inch from the edge of the badge and shall be 15/32 inch + 1/16 inch - 0 apart.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished obverse hub or die.

2. The manufacturer may deviate from MIL-DTL-3628 by using nickel underplating prior to plating with 24K gold.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Navy - NU

Preparing activity:
Navy - NU

Review Activity:
DLA - CT

(Project No. 8455-2026-275)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:24Z
Check the source to verify that this is the current version before use.