INCH-POUND


MIL-DTL-3628/261
21 April 2014

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, STAFF, INSPECTOR GENERAL, U.S. AIR FORCE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

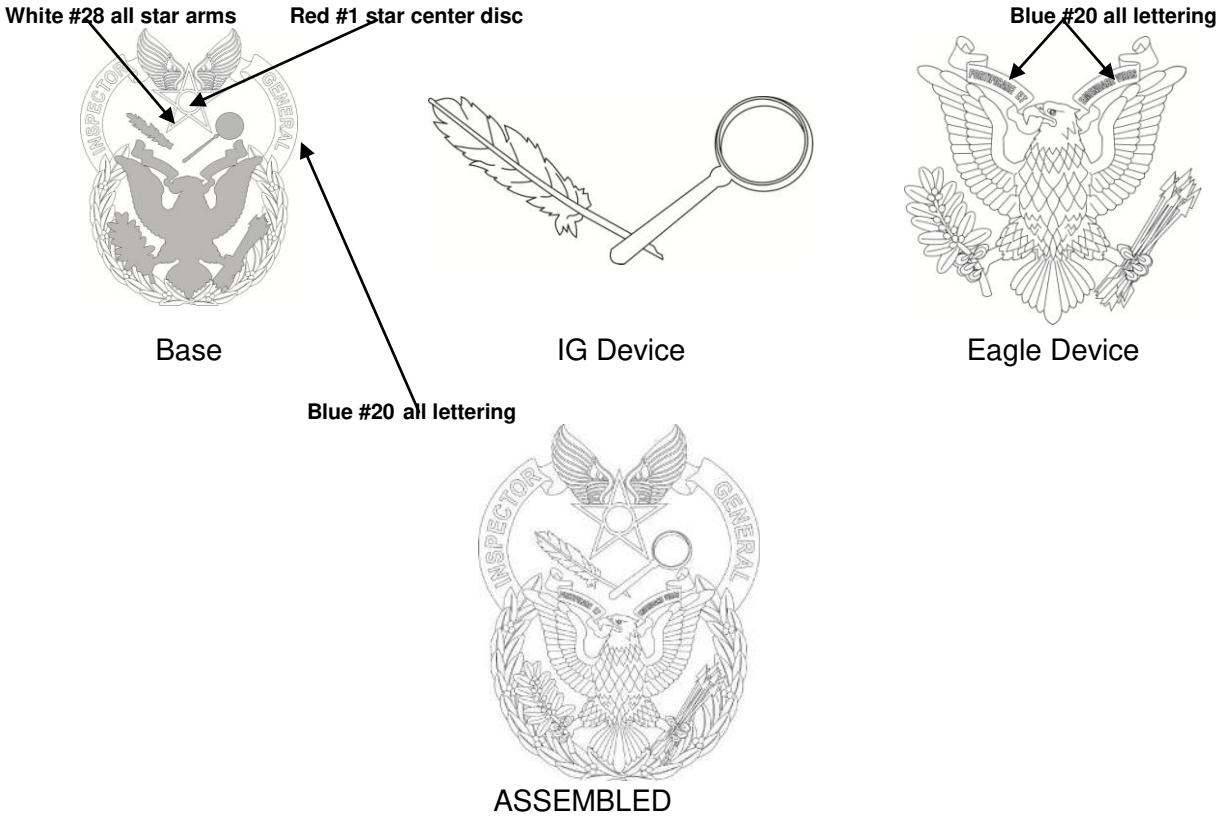

Base

IG Device

Eagle Device

ASSEMBLED

DASH NO.
-1: Base
-2: IG Device
-3: Eagle Device

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:25Z
Check the source to verify that this is the current version before use.

MATERIAL (-1, -2, -3): Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
-1 SILVER AREAS: Background, laurel wreath and Hap Arnold Star Dike Lines to be Nickel Plated, Matte Finish, Polished Highlights and will match The Institute of Heraldry (TIOH) Metal Finish Chip Number 18.
GOLD AREAS: Designation Scrolls and Wings of Hap Arnold Star to be 24K Gold Plated, Matte Finish, Polished Highlights and will match TIOH Metal Finish Chip Number 8.

-2 and -3: 24K Gold Plated, Matte Finish, Polished Highlights and will match TIOH Metal Finish Chip Number 8.

DIMENSIONS:
HEIGHT:
-1: 2-9/16 inches (REF)
-2: 31/64 inch (REF)
-3: 1-15/32 inches (REF)
ASSEMBLED: 2-9/16 inches (REF)
WIDTH:
-1: 1-15/16 inches (REF)
-2: 1-7/64 inches (REF)
-3: 1-1/2 inches (REF)
ASSEMBLED: 1-15/16 inches (REF)
THICKNESS:
-1: 0.066 ± 0.010 inch (Over the “G” in general)
-2: 0.087 ± 0.010 inch (Top of key)
-3: 0.177 ± 0.010 inch (Top of eagle chest)
ASSEMBLED: 0.177 ± 0.010 inch (Center of eagle chest)

ATTACHING DEVICE: Attaching device will be three (3) prongs with wing-grip type clutch. Two prongs shall be located along the horizontal center line of the top portion of the badge equidistant from each end and 1-3/8 inches ± 1/64 inch apart. One (1) prong will be located along the vertical center line, 3/16 inches ± 1/64 inch from the bottom edge of the badge.

NOTES:
1: The term (REF) refers to the measurements taken from the Government furnished hub or die.

2: A full forcer will be used on -1 to reduce the weight of the badge.

3: -2 IG Device and -3 Eagle device will be swedged to the base with additional support of epoxy adhesive.

5: The manufacturer may deviate from MIL-DTL-3628 by using nickel underplating prior to applying the requisite 24K gold plating.

6: Hard cloisonné enamel may be used in lieu of epoxy resin. If hard cloisonné enamel is used, the base material must be Gilding Metal 95/5 (UNS Alloy No. C-210)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:25Z
Check the source to verify that this is the current version before use.

Epoxy resin will be applied to the Base of the badge as specified below, and must match TIOH Hard Enamel Color Chip Numbers listed.

TIOH HARD ENAMEL COLOR CHIP NUMBER	LOCATION(S)
Red #1	Center disc of Hap Arnold Star
Blue #20	All Lettering on Designation Scrolls
White #28	Arms of Hap Arnold Star

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army – IH

Review activity:
DLA - CT

(Project No. 8455-2014-075)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:25Z
Check the source to verify that this is the current version before use.