MIL-A-6589A(USAF)

13 December 1968
Superseding
MIL-A-6589(USAF)
6 July 1951

MILITARY SPECIFICATION

AMPLIFIER, ELECTRONIC CONTROL, SINGLE CHANNEL, TYPE A-2

1. SCOPE

1.1 This specification covers one type of single channel electronic control amplifier designated Type A-2.

2. APPLICABLE DOCUMENTS

* 2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

Federal

L-P-378	Plastic Film (Polyethylene Thin Gage)
QQ-P-416	Plating, Cadmium (Electrodeposited)
PPP-B-636	Box, Fiberboard

Military

MIL-P-116	Preservation, Methods of
MIL-D-1000	Drawing, Engineering and Associated List
MIL-E-5272	Environmental Testing, Aeronautical and Associated Equipment, General Specification for
MIL-S-7742	Screw Threads, Standard, Optimum Selected Series, General Specification for
MIL-C-7769	Cushioning Material, Uncompressed Bound Fiber for Packaging
MIL-A-8625	Anodic Coatings, for Aluminum and Aluminum Alloys

STANDARDS

Military

MIL-STD-129	Marking for Shipment and Storage

FSC 6605

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:12Z
Check the source to verify that this is the current version before use.

MIL-STD-130	Identification Marking of U.S. Military Equipment
MIL-STD-143	Specification and Standard Order of Precedence for the Selection of
MIL-STD-461	Electromagnetic Interference Characteristics Requirements for Equipment
MIL-STD-462	Electromagnetic Interference Characteristics, Measurement of
MS3102	Connector, Receptacle, Electric, Box Mounting
MS3106	Connector, Plug, Electric, Straight
MS21044	Nut, Self-Locking, Hexagon - Regular Height, 250°F, 125 KSI FTU and 60 KSI FTU
MS21326	Stud, Style IV Snapslide Fastener
MS21332	Fastener - Snapslide
MS33586	Metal, Definition of Dissimilar

DRAWING

Air Force

48A6162	Stud - Mounting Amplifier

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

* 3.1 First article. This specification provides for first article testing.

3.2 Component parts. The amplifier shall consist of a slaving channel, an integral power supply, an electrical receptacle, mounting base, and chassis.

3.3 Material.

3.3.1 Specifications and standards. Specifications and standards for all materials, parts, and Government certification and approval of processes and equipment, which are not specifically designated herein and which are necessary for the execution of this specification, shall be selected in accordance with MIL-STD-143, except as provided in the following paragraph.

3.3.1.1 Standard parts. AN or MS Standard parts shall be used wherever they are suitable for the purpose, and shall be identified by their part numbers. Commercial utility parts such as screws, bolts, nuts, and cotter pins may be used, provided they have suitable properties and are replaceable

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:12Z
Check the source to verify that this is the current version before use.

by the AN or MS Standard parts without alteration, and provided the corresponding AN or MS part numbers are referenced on the drawings and in the parts lists. In applications for which no suitable corresponding AN or MS part is in effect on date of invitation for bids, commercial parts may be used provided they conform to the requirements of this specification.

3.3.2 Protective treatment. When materials are used in the construction of the amplifier that are subject to deterioration when exposed to climatic and environmental conditions likely to occur during service usage, they shall be protected against such deterioration in a manner that will in no way prevent compliance with the performance requirements of this specification. The use of any protective coating that will crack, chip, or scale with age or extremes of climatic and environmental conditions shall be avoided.

3.3.3 Metals. Metals used in the construction of the amplifier shall be of the corrosion-resistant type or shall be suitably protected to resist corrosion during normal service life.

* 3.3.3.1 Dissimilar metals. Unless suitably protected against electrolytic corrosion, dissimilar metals shall not be used in intimate contact with each other. Dissimilar metals are defined in MS33586.

3.3.4 Nonmagnetic materials. Nonmagnetic materials shall be used for all parts of the amplifier, except where magnetic materials are essential.

3.3.5 Fungus proof materials. Materials which are not nutrients for fungi shall be used to the greatest extent practicable. In cases where materials that are nutrients for fungi must be used, such materials shall be treated with a fungicidal agent, as approved by the Procuring Agency.


3.4 Design and construction. The amplifier shall conform to Figure 1. The design shall be reasonably simple to permit overhaul or repair without requiring special tools or fixtures. The amplifier shall be constructed so that no parts will work loose in service. It shall be built to withstand the strains, jars, vibrations, and other conditions incident to shipping, storage, installation, and service.

3.4.1 The amplifier shall be constructed so that adjustments and repairs can be easily made by the personnel of operating units and overhaul bases.

3.4.2 Connector. The amplifier chassis shall be provided with an MS3102A-20-27P electrical connector plug.

3.4.3 Slaving channel. The slaving channel shall be designed to receive a signal of controlled low amplitude phase reversing voltage and shall be capable

Source: https://assist.dla.mil -- Downloaded: 20261O-17T07:12Z
Check the source to verify that this is the current version before use.

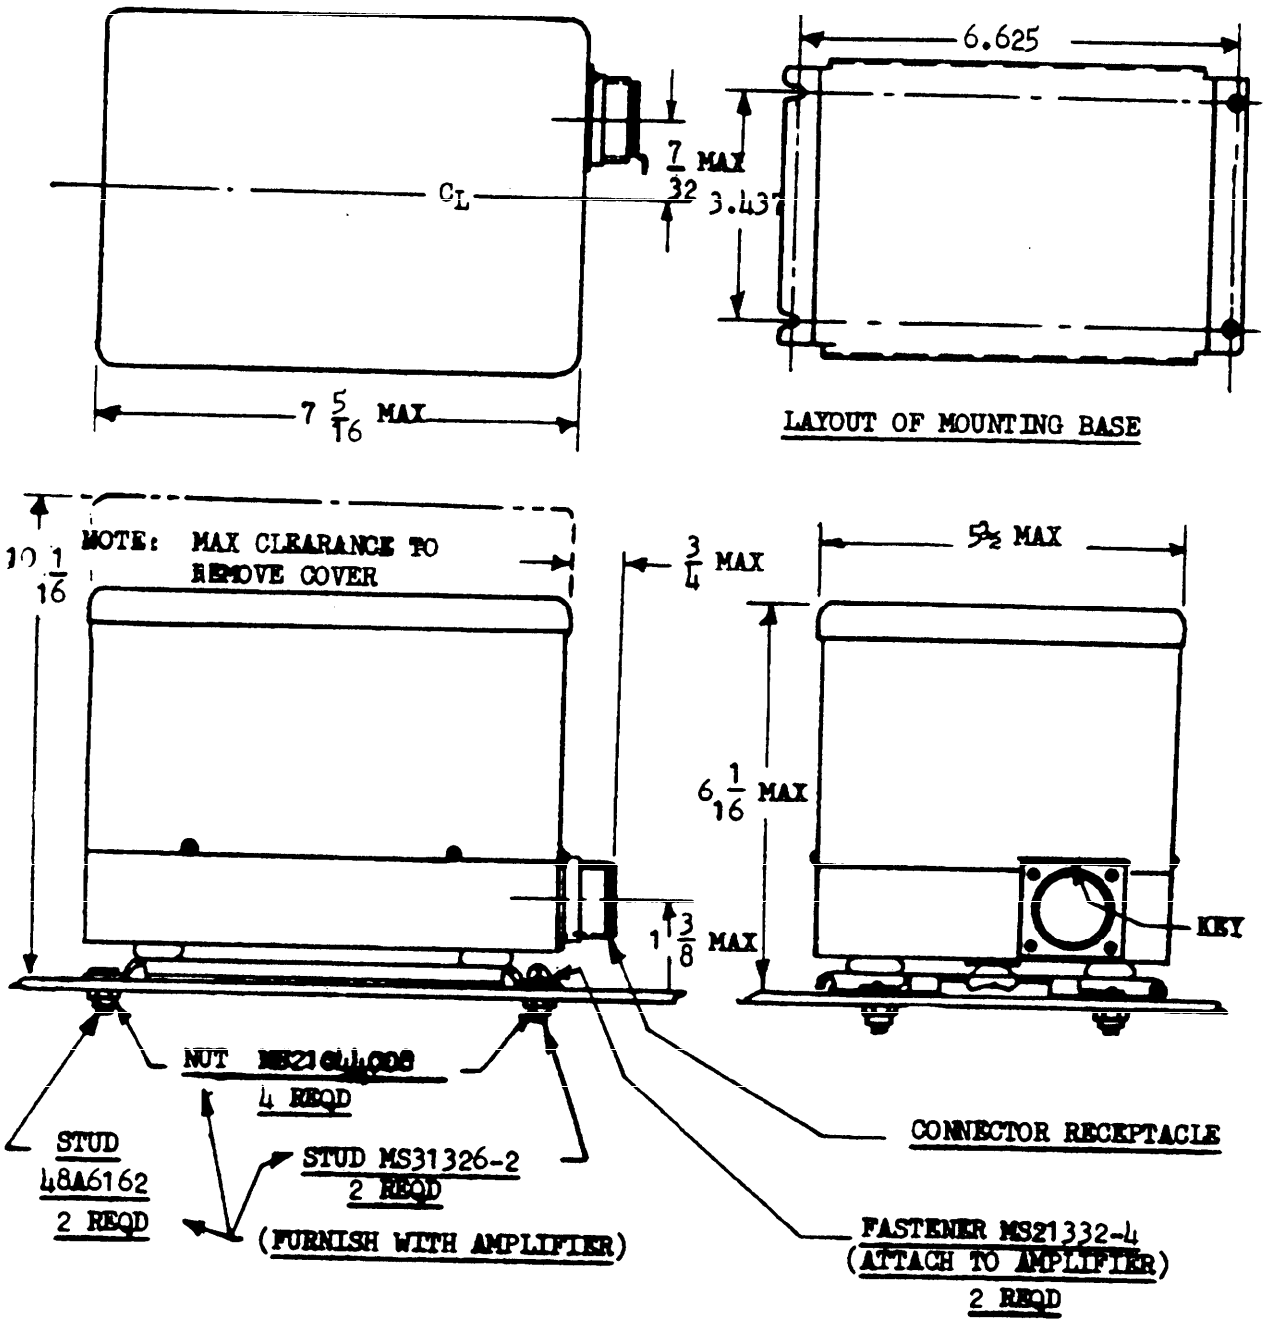

DIMENSIONS IN INCHES
UNLESS OTHERWISE SPECIFIED
TOLERANCES: DECIMALS ± .005

FIGURE 1. AMPLIFIER - TYPE A-2

Source: https://assist.dla.mil -- Downloaded: 202610-17T07:12Z
Check the source to verify that this is the current version before use.

of producing a phase reversing alternating current voltage of required power as indicated under Slaving output and Polarity tests specified in Section 4.

3.4.4 Power supply. An integral power supply shall be provided in the amplifier to furnish plate voltages for the vacuum tubes and other voltages as specified herein.

3.4.5 Power input. The amplifier shall be electrically operated from 115V, 3 phase, 400 Hz ac and 28V dc.

3.4.6 Protective device. A 3/4 to 1 amp fuse shall be provided in the lead to the primary of the power and transmitter excitation transformer to protect against overload conditions.

3.5 Performance. The amplifier shall be capable of operating under the following conditions:

a. A temperature range of -54 to +71°C.

b. A pressure altitude range from 0 to 50,000 feet.

c. A relative humidity of 95 $\pm$5 percent at a temperature of 71 $\pm$2°C.

d. Most fungi encountered in tropical and semi-tropical climates.

e. Vibration incident to use on aircraft.

3.5.1 Radio noise suppression. Radio noise suppression shall be within the limits specified in MIL-STD-461.

3.5.1.1 Radio noise interference. The equipment shall be provided with the necessary radio noise suppression features to suppress its radio noise to the limits specified herein for conducted and radiated radio noise. In particular, these features shall include adequate filters and inclosing case construction which will prevent noise leakage through it or through joints, seams and mating surfaces. The volume and weight of filtering equipment required shall be minimized by the application of proper electrical and mechanical design and construction.

3.5.1.2 Conducted radio noise. The conducted radio frequency noise voltage produced by operation of the equipment on wiring connected to or associated with the equipment, when measured between each terminal and the ground plane, shall not exceed 200mv over the frequency range of 0.15 to 0.2MHz and 50mv over the frequency range 0.2 to 20MHz.

Source: https://assist.dla.mil -- Downloaded: 202610-17T07:12Z
Check the source to verify that this is the current version before use.

3.5.1.3 Radiated radio noise. The radio frequency noise field produced by operation of the equipment, and when measured with the rod or dipole antenna of the measuring instrument placed in various positions one foot from the equipment and inter-connecting cable assemblies, shall not exceed the following values:

Frequency Band MHz	Microvolts
0.15 - 65.0	2.5
65.0 - 100.0	5.0
100.0 - 150.0	10.0

3.6 Interchangeability. All parts having the same manufacturer's part number shall be directly and completely interchangeable with each other with respect to installation and performance. Changes in manufacturer's part numbers shall be governed by the drawing number requirements of MIL-D-1000.

3.7 Finish.

3.7.1 Aluminum alloy parts. Aluminum alloy parts shall be coated with an anodic film conforming to MIL-A-8625 except that small holes and case inserts need not be anodized.

3.7.2 Steel parts. Steel parts shall be cadmium plated, where practicable, in accordance with QQ-P-416, Type II or III, as applicable, and of a Class that is adequate to achieve the degree of protection required.

3.7.3 Screw threads. Unless otherwise specified, the threads of all machine screws, 0.060 inch or larger in diameter, shall conform to MIL-S-7742.

3.7.4 Weight. The weight of the amplifier completely assembled, less mounting nuts and mounting screws shall not exceed 6-1/2 pounds.

3.7.5 Case. The case shall be made of non-ferrous low density metal and shall be entirely covered with a durable dull black finish.

3.8 Nameplate. A nameplate, permanently and legibly filled in with the following information, shall be securely attached to the amplifier:

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:12Z
Check the source to verify that this is the current version before use.

Amplifier, Electronic Control, Single Channel
Type A-2
Specification MIL-A-6589
Mfr's. Part No. _____
Mfr's Serial No. _____
Order No. _____
Stock No. _____
(Mfr's. Name or Trademark)
U.S. Property

3.8.1 Manufacturer's part number. The manufacturer's part number marked in the space provided on the nameplate shall be in accordance with MIL-STD-130.

3.8.2 Manufacturer's serial number. The manufacturer's serial number shall be entered in the space provided on the nameplate. The serial number shall not be repeated and shall be a concise identifying number.

3.8.3 Order number. Where both the purchase order number, such as "AF 33(038) 50-4710" and the contract number, such as "AF 33(038)-1565", are given on an order or contract, the number placed on the nameplate in the place designated "Order Number" shall be the number corresponding to the Air Force's purchase order number, for example: "50-4710". In the absence of the Air Force's purchase order number, and the contract number is given, the letters "AF" and the last digits of the contract number shall be placed on the nameplate, for example: "AF-1565".

3.9 Workmanship.

3.9.1 General. The amplifier, including all parts and accessories, shall be fabricated and finished in a thoroughly workmanlike manner. Particular attention shall be given to freedom from blemishes, defects, burrs, and sharp edges; accuracy of dimensions, and marking of parts and assemblies, alignment of parts and tightness of assembly screws, and bolts; et cetera.

3.9.2 Cleaning. The amplifier shall be thoroughly cleaned, and loose, spattered, or excess solder, metal chips, and other foreign material removed during and after final assembly.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities

Source: https://assist.dla.mil -- Downloaded: 202610-17T07:12Z
Check the source to verify that this is the current version before use.

suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

*4.2 Classification of inspection. The examination and testing of the amplifiers shall be classified as follows:

a. First article inspection.

b. Quality conformance inspection.

4.3 Test conditions:

4.3.1 Standard atmospheric conditions. Whenever the pressure and temperature existing at the time of the test are not specified definitely, it is understood that the test is to be made at atmospheric pressure (approximately 29.92 inches Hg) and at room temperature (approximately +25°C). When tests are made with atmospheric pressure or room temperature differing materially from the above values, proper allowance shall be made for the difference from the specified condition.

4.3.2 Attitude. Unless otherwise specified, the amplifier shall be tested in normal operating position.

4.3.3 Test diagram. Figure 2 covers a suggested test diagram which may be used as a guide. However, the electrical receptacle on the amplifier shall be wired so that the functions designated in Figure 2 are available from the points referenced on the receptacle of the amplifier.

* 4.4 First article inspection.

* 4.4.1 First article test sample. The test sample shall consist of two amplifiers representative of the production equipment. The samples shall be identified with the manufacturer's part number and such other information as required by the procuring activity.

* 4.4.2 First article tests. The first article tests shall consist of all tests described under 4.6.

* 4.5 Quality conformance inspection. Quality conformance inspection shall consist of:

a. Individual tests.

b. Sampling tests.

Source: https://assist.dla.mil -- Downloaded: 202640-17T07:12Z
Check the source to verify that this is the currentversion before use.

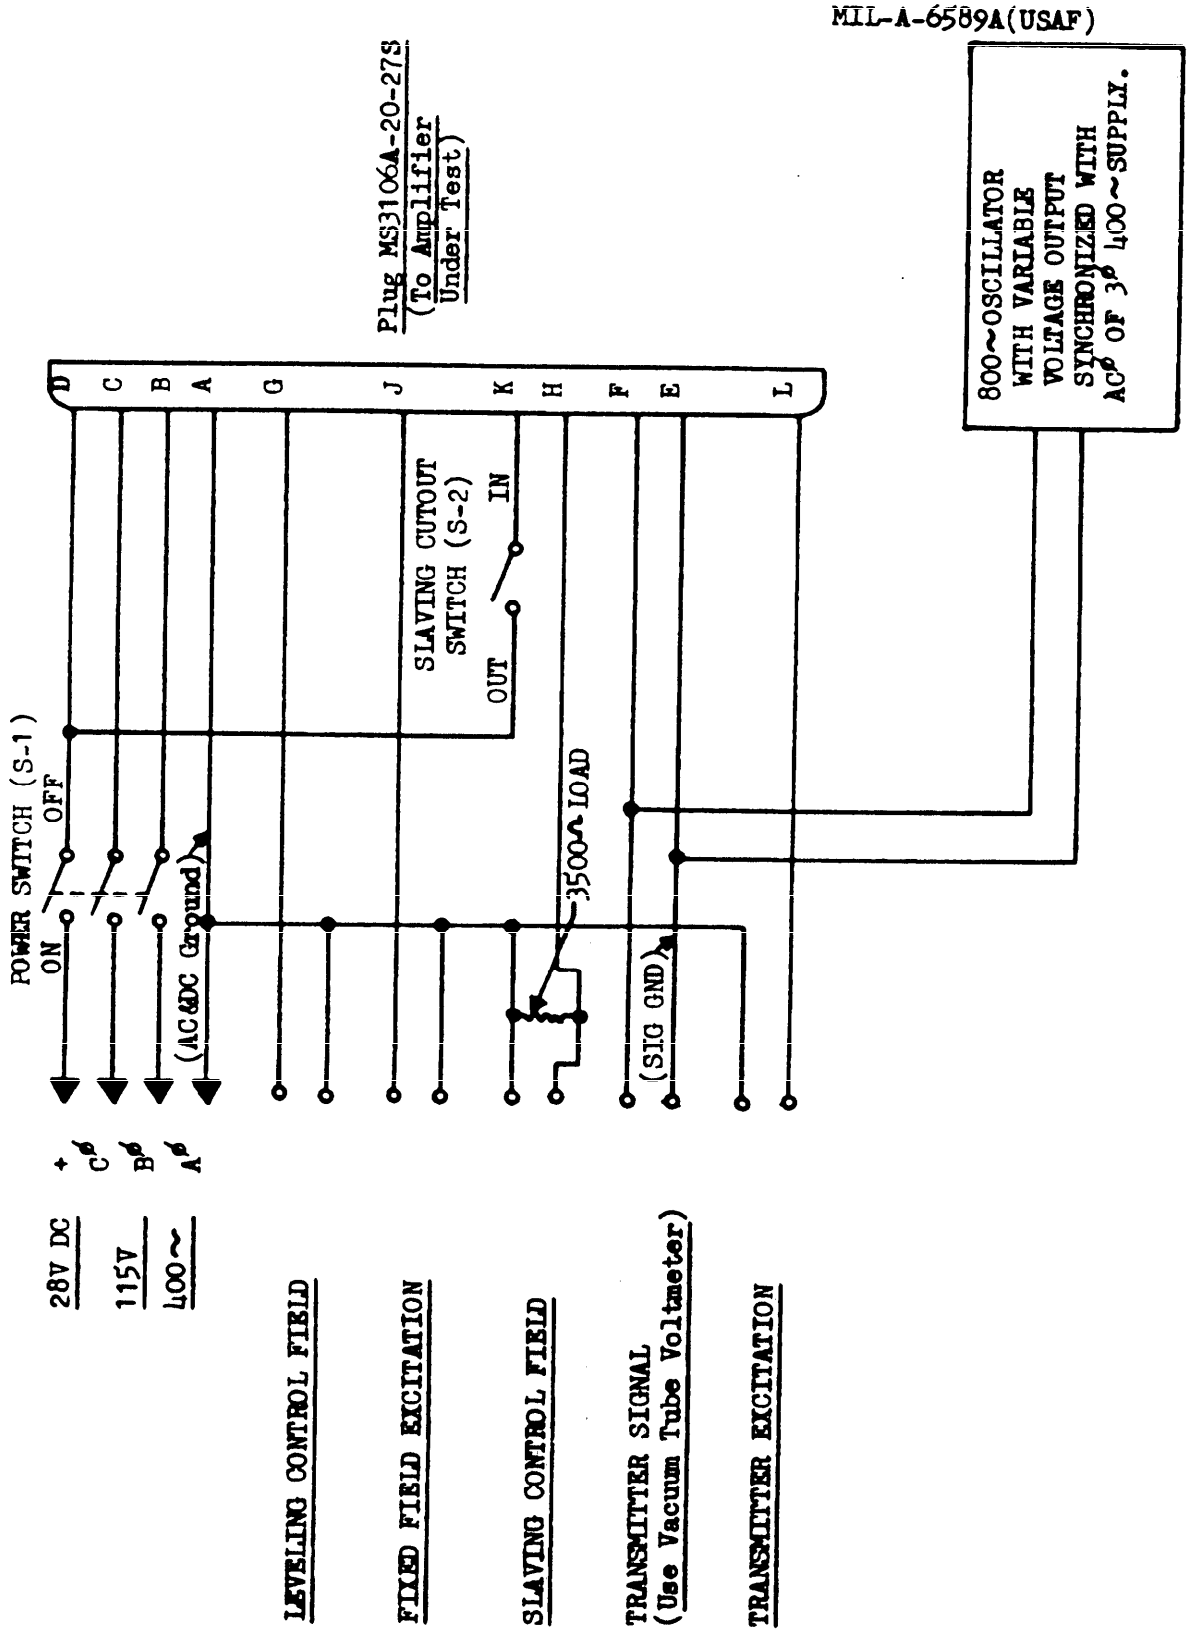


FIGURE 2. CIRCUIT - AMPLIFIER TEST ANALYZER

Source: https://assist.dla.mil -- Downloaded: 202610-17T07:12Z
Check the source to verify that this is the current version before use.

* 4.5.1 Individual tests. Each amplifier shall be subjected to the following tests as described under 4.6:

a. Examination of product.

b. Output voltages.

c. Slaving output and polarity.

d. Grounded signal.

* 4.5.2 Sampling tests.

* 4.5.2.1 Sampling plan A. Three amplifiers shall be selected at random from each 100 or fraction thereof produced and subjected to the following tests as described under 4.6:

a. Individual tests.

b. Low Temperature operation.

c. High temperature operation.

* 4.5.2.2 Sampling plan B. Three amplifiers shall be selected at random from the first ten items produced on each contract or order and subjected to the following tests in the order specified and as described under 4.6:

a. Sampling plan A tests.

b. Low temperature.

c. Altitude.

d. High temperature.

e. Radio noise interference.

f. Vibration.

g. Humidity

h. Fungus.

i. Salt spray.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:12Z
Check the source to verify that this is the current version before use.

* 4.5.2.3 Rejection and retest. When an item selected from a production run fails to meet the specification, no items still on hand or later produced shall be accepted until the extent and cause of failure have been determined and appropriately corrected. The contractor shall explain to the Government representative the cause of failure and the action taken to preclude recurrence. After correction, all tests shall be repeated.

4.5.2.3.1 Individual tests may continue. For production reasons, individual tests may be continued pending the investigation of a sampling test failure. But final acceptance of items on hand or produced later shall not be made until it is determined that all items meet all requirements of the specification.

* 4.5.3 Defects in items already accepted. The investigation of a test failure could indicate that defects may exist in items already accepted. If so, the contractor shall fully advise the procuring activity of all defects likely to be found and the method of correcting them.

* 4.6 Test methods.

4.6.1 Examination of product. Each amplifier shall be inspected to determine compliance with the requirements specified herein with respect to materials, workmanship, and marking.

4.6.2 Output voltages. The designated output voltages shall be obtained from the amplifier between the points stipulated in Figure 2, under the following conditions:

	Fast Slaving	Normal Slaving
Transmitter excitation, Phases A and C	23V ac ±5 percent	23V ac ±5 percent
Fixed field excitation, Phases A and C	115V ac ±5 percent	23V ac ±5 percent
Leveling control field, Phases B and C through internal isolation transformer, one lead of output grounded	32V ac ±5 percent	16V ac ±5 percent

With the slaving cutout switch open, the referenced fast slaving voltage shall occur immediately upon applying power to the amplifier. The normal slaving voltages shall occur between 2 and 3-1/2 minutes after power is applied to the amplifier. This test shall be preceded by at least a 15-minute period of inoperation to allow the time delay relay to normalize.

4.6.3 Slaving output and polarity tests:

4.6.3.1 Fast slaving output. The slaving control field output voltage, when measured across a 3500 ohm load for the condition of fast slaving with an input of 0.4V of both in phase and 180 degrees out of phase signal, shall be between 65 and 85V. In addition, the difference between output voltages for in phase and 180 degrees out of phase input signal voltage of 0.4V shall not exceed 6V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:12Z
Check the source to verify that this is the current version before use.

4.6.3.2 Normal slaving output. The slaving control field output voltage limits, when measured across a 3500 ohm load for the condition of normal slaving, shall be as indicated below when the input signal voltage is as stipulated. In addition, the unbalance between output voltages for in phase and out of phase input signal voltages of the same magnitude shall be as specified.

Input Signal Volts	Output Signal Volts	Maximum Unbalanced Volts
0.04	5 to 15	2
0.08	10.5 to 18.5	3.5
0.20	13.5 to 18.5	3.5
0.40	13.5 to 20	3.5

4.6.3.3 Slaving cutout. The amplifier shall be operated under normal slaving conditions with an input signal of 0.4V. The slaving cutout switch shall be closed, and the slaving control field output voltage shall drop to 0.01V or less. The slaving cutout switch shall then be opened and the slaving control field output voltage shall again be obtained.

4.6.3.4 Polarity. With an input signal voltage from the high side with respect to ground in phase with the 800 Hz reference voltage high side with respect to ground, the output voltage, as measured across a 3500 ohm load, from the high side with respect to ground, shall be in phase with the line voltage "B" phase with respect to "C" phase.

4.6.4 Grounded signal. The amplifier shall be operated under normal slaving conditions, except that the signal input terminal which is normally above ground shall be connected to the ground. The output as measured across a 3500 ohm load shall not exceed 2V.

4.6.5 Low temperature operation. The amplifier shall be subjected to a temperature of -54 $\pm 2^{\circ}$C for a period of 4 hours. At the end of this period and while still at this temperature, the amplifier shall be subjected to all the Individual tests and the same tolerances shall apply, except that the Grounded signal tolerance shall not exceed 3V.

4.6.6 High temperature operation. The amplifier shall be placed in a chanber and maintained at a temperature of 71 $\pm 2^{\circ}$C for a period of 4 hours. At the end of this period and while still at this temperature, the amplifier shall be subjected to all of the Individual tests as indicated in Low temperature operation and the same tolerance shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:12Z
Check the source to verify that this is the current version before use.

4.6.7 Low temperature. The amplifier shall be subjected to Low temperature tests. Procedure III of MIL-E-5272. At the end of the 48-hour period, and while still at this low temperature, the amplifier shall be operated throughout its range without exhibiting erratic characteristics. At the end of the 24-hour period and while still at the -54°C temperature, the amplifier shall be subjected to the individual tests stipulated for low temperature operation and the same tolerances shall apply. There shall be no damage which would adversely affect subsequent operation of the amplifier.

4.6.8 Altitude. The amplifier shall be subjected to Altitude tests. Procedure III of MIL-E-5272, at a temperature of -54 ±2°C for a continuous period of 4 hours. While at this temperature and pressure, the amplifier shall be subjected to the Individual tests stipulated for low temperature operation and the same tolerances shall apply. There shall be no damage which would adversely affect subsequent operation of the amplifier.

4.6.9 High temperature. The amplifier shall be subjected to a High temperature tests Procedure I of MIL-E-5272. At the end of the test period and while still at the high temperature, the amplifier shall operate without indication of erratic action or damage. After the chamber has been returned to room temperature, and the amplifier permitted to normalize at room temperature, for a minimum period of 4 hours, the amplifier shall meet the individual test requirements specified herein and there shall be no damage which would adversely affect subsequent operation of the amplifier.

4.6.10 Radio noise interference. Radio noise measurements shall be made in a shielded room and under the following conditions:

4.6.10.1 Conducted emission. Conducted radio noise measurements shall be in accordance with MIL-STD-462.

4.6.10.2 Radiated emission. Radiated radio noise measurements shall be made on the equipment in the range from 0.15 to 20MHz in accordance with MIL-STD-462. The arrangement of the equipment and test apparatus shall be as specified in MIL-STD-462. Radiated radio noise measurements shall also be made on the equipment in the range from 20 to 150MHz using a Measurements Corporation Model 58, Very High Frequency Noise Meter with dipole antenna, or approved equivalent. The arrangement of equipment and test apparatus shall be as specified in MIL-STD-462. When making any measurement, the "Peak-Average" switch of the Model 58 instrument shall be in "Peak" position. Measurements shall be made on not less than 12 frequencies within the required range and not less than 3 measurements shall be made in each of the frequency bands A, B, C, D of the Measurements Corporation, Model 58 instrument, or approved equivalent. Measurements shall be made also at any points of peak noise output found in"sweeping" the specified frequency range.

Source: https://assist.dla.mil -- Downloaded: 202640-17T07:12Z
Check the source to verify that this is the currentversion before use.

4.6.10.3 The equipment shall be operated over its entire range during testing.

4.6.11 Vibration. This test shall be conducted while the amplifier is being operated on normal power input and a signal level of 0.4V. The amplifier shall be subjected to Vibration tests Procedure I of MIL-E-5272. After the vibration period, the amplifier shall meet the requirements stipulated under individual tests. In addition, no looseness in the mechanism nor damage to any part of the amplifier shall result from this test.

4.6.12 Humidity. The amplifier shall be subjected to Humidity tests Procedure I of MIL-E-5272. The amplifier shall then meet the requirements specified for individual tests. There shall be no deterioration as a result of this test which could in any manner prevent the amplifier from meeting operational requirements during its normal service life.

4.6.13 Fungus. The amplifier shall be subjected to Fungus tests Procedure I of MIL-E-5272. The unit selected shall not have previously been subjected to the Salt spray test. At the end of the test period, the amplifier shall meet the requirements specified under individual tests. There shall be no corrosion or deterioration, as result of this test, which could in any manner prevent the amplifier from meeting all the operational requirements during its normal service life.

4.6.14 Salt spray. The amplifier shall be subjected to Salt spray tests Procedure I of MIL-E-5272. At the end of the test period, the amplifier shall be subjected to the individual tests specified herein and the same tolerances shall apply. However, the amplifier may be washed in clear running water prior to conducting operational tests. The amplifier shall also be subjected to visual examination for corrosion. There shall be no corrosion or deterioration as a result of this test, which could in any manner prevent the amplifier from meeting operational requirements during its normal service life.

* 4.7 Inspection and test. Tests of methods of preservation and packaging shall be accomplished in accordance with Section 4 of MIL-P-116 to insure compliance with Section 5 of this specification.

5. PREPARATION FOR DELIVERY

* 5.1 Preservation and packaging. Each amplifier shall be preserved and packaged in quantity unit packs of one each in accordance with Method IIB of MIL-P-116. Each amplifier shall be wrapped with a polyfilm, L-P-378 or equal, and placed within a form fitting primary container. After the primary container has been bagged to meet the requirements of Method IIB, apply a two inch thickness of bound fiber (MIL-C-7769 Class A Type III) on all faces between primary and unit container. Primary and unit containers to be constructed in accordance with PPP-B-636 style RSC.

* 5.2 Packing. Each amplifier procured in accordance with this specification shall be packed level B for stock unless otherwise stipulated in the contract or order by the procuring activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:12Z
Check the source to verify that this is the current version before use.

5.3 Marking. Marking shall be as specified in MIL-STD-129. In addition, each container shall be marked with the following information:

Amplifier, Electronic Control, Single Channel, Integral, Slaved
Gyro Magnetic Compass
Type A-2
Specification MIL-A-6589
Mfr's Part No. _____
Mfr's. Serial No. _____
Order No. _____
Stock No. _____
Date of Manufacture _____
Quantity _____
(Mfr's. Name or Trademark)
Name of Contractor (if not the same as manufacturer)

5.3.1 Precautionary marking. The following precautionary marking shall be included on the exterior shipping container:

FRAGILE
DELICATE INSTRUMENTS
HANDLE WITH CARE

6. NOTES

6.1 Use. The Type A-2 amplifier, covered by this specification, is intended for use in supplying the necessary electrical slaving, leveling, and transmitter excitation voltages of the Type J-2 slaved gyro magnetic compass system.

* 6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.

b. Level of packing required (See 5.2).

c. Point of inspection for first article tests (See 4.4).

NOTE: The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:12Z
Check the source to verify that this is the current version before use.

of the marginal notations and relationship to the last previous issue.

Custodian:
Air Force - 71

Reviewer:
Air Force - 71

Preparing activity:
Air Force - 71

Project number
6605-F177

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:12Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

ORGANIZATION | CITY AND STATE

CONTRACT NO. | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT $

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

   ☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)* | DATE

DD FORM 1426 1 APR 63 REPLACES NAVSHIPS FORM 0885, WHICH IS OBSOLETE Air Force OC, 29 Apr 64-400

Source: https://assist.dla.mil -- Downloaded: 202640-17T07:12Z
Check the source to verify that this is the current version before use.