INCH-POUND

MIL-DTL-6645K
27 JANUARY 2023
SUPERSEDING
MIL-DTL-6645J
31 AUGUST 2001

DETAIL SPECIFICATION

PARACHUTES, PERSONNEL, GENERAL SPECIFICATION FOR

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope.

This specification covers the general and specific requirements for personnel parachutes and components thereof, as well as specific manufacturing instructions. Personnel parachutes classified under this specification are part numbers and NSNs authorized by the Qualifying Activity for listing on the Qualified Products List (QPL).

2. APPLICABLE DOCUMENTS

2.1 General.

The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

Comments, suggestions, or questions on this document should be addressed to AFLCMC/EZSS, 2145 Monahan Way, Bldg. 28, Wright-Patterson AFB OH, 45433-7017 or e-mailed to ENGINEERING.STANDARDS@US.AF.MIL. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil/.

AMSC N/A FSC 1670

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:17Z
Check the source to verify that this is the current version before use.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks.

The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

COMMERCIAL ITEM DESCRIPTIONS

A-A-59291	Ink, Marking (For Parachutes and Other Textile Items)

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-DTL-7567	Parachutes, Personnel, Detail Manufacturing Instructions for
MIL-DTL-32075	Label: For Clothing, Equipage, and Tentage, (General Use)

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-849	Inspection Requirements, Definitions and Classification of Defects for Parachutes

(Copies of these documents are available online at https://quicksearch.dla.mil/.)

2.2.2 Other Government documents.

The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEFENSE STANDARDIZATION PROGRAM

SD-6	Provisions Governing Qualification Qualified Products Lists and Qualified Manufacturers Lists

(Copies of this document are available online at https://quicksearch.dla.mil/.)

DEPARTMENT OF DEFENSE

DoDM 4120.24	Defense Standardization Program (DSP) Procedures

(Copies of this document are available online at https://www.esd.whs.mil/dd/.)

2.3 Non-Government publications.

The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

ASTM INTERNATIONAL

ASTM D737	Standard Test Method for Air Permeability of Textile Fabrics (DoD Adopted)

(Copies of this document are available online at https://www.astm.org/.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:17Z
Check the source to verify that this is the current version before use.

PARACHUTE INDUSTRY ASSOCIATION (PIA)

PIA-C-5040 Cord, Fibrous, Nylon (DoD Adopted)

(Copies of this document are available online at https://www.pia.com/.)

2.4 Order of precedence.
Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Qualification.
Parachute assemblies and components furnished under this specification shall be products that are authorized by the qualifying activity for listing on the applicable qualified products list before contract award (see 4.2 and 6.4).

3.1.1 Submittal of inspection samples.
Contractors shall submit products to the appropriate qualifying activity for evaluation. For specific information regarding points of contact and products qualified, contact the Air Force – Standardization Management Activity (SMA) Code 11 via email at Engineering.Standards@us.af.mil.

3.1.2 Qualification inspection samples.
The qualification inspection sample shall comply with all the requirements specified herein and shall consist of two complete parachute1/ assemblies or components (if qualification is desired for a component only). The qualification sample shall be accompanied by the following items with affidavits of the source of supply (supplier test reports (see 6.4.2) and certifications) of each item: 5 yards of each color and type of broad cloth; 0.5 pound spool, cone, or tube of each color and type of thread; 30 yards of each color and type of cord, webbing and tape; two pieces of each type of hardware, and two of any miscellaneous item such as stiffeners, zippers, etc., used in the construction of the parachute assembly and components. The samples and all associated documentation shall be taken from the same supplier lots used to manufacture the qualification inspection sample. The samples shall comply in all respects with the requirements specified herein. Samples shall be forwarded as directed by the activity responsible for qualification.

NOTE: 1/ At their option, a qualifying activity might only request one parachute assembly.

3.1.3 Identification of samples.
Each sample shall be plainly identified by a securely attached, durable tag marked with the following information:

a. Sample for qualification inspection.
b. Name of product (parachute assembly or components).
c. Manufacturer's designation or number.
d. Name of manufacturer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:17Z
Check the source to verify that this is the current version before use.

e. Submitted by (name and date) for qualification inspection with the requirements of MIL-DTL-6645 under authorization (reference authorizing letter).

3.1.4 Qualification tests.
Qualification tests shall consist of all tests and examinations necessary to assure products submitted conform to the Technical Data Package (TDP) for the associated item.

3.1.5 Plant inspections.
The Qualifying Activity reserves the right to conduct plant inspections during the qualification process or any time after a manufacturer is listed on the QPL. A minimum of five days' notice must be given to a manufacturer to conduct an inspection. ISO standards or pre-award surveys may or may not be accepted in lieu of an actual inspection. The inspections are intended and designed to help the Qualifying Activity determine if a contractor is capable of manufacturing QPL items in a production environment. The Qualifying Activity shall have at its disposal, and available to contractors, the inspection requirements. Failing a plant inspection shall be cause for a contractor to be excluded from, or removed from, the QPL.

3.1.6 Subcontracting.
Prime contractors shall not subcontract the fabrication of any parachute component unless the subcontractor has been qualified by the Qualifying Activity for the specific NSN or part number. Any use of a subcontractor to fabricate any part of a parachute component shall be disclosed during the qualification process. Qualification time may take as long as six months. When a contractor has multiple plants, all components and parachute subassemblies (components without an NSN or part number designation) shall be individually qualified at each plant location (the same as the NSN or part number). Qualifying activities shall file with the Preparing Activity of the QPL a list of subassemblies which have been qualified (see 3.1.7).

3.1.7 Qualification notifications.
The Qualifying Activity shall notify contractors of qualification testing results within 45 days after completion of qualification testing. Contractors shall allow the Qualifying Activity six months to complete an initial qualification examination.

3.1.8 Qualification retention and cause for removal.
The SD-6 and DoDM 4120.24 contain qualification and qualification retention requirements and instructions. Justification for removal from the QPL are also contained in the SD-6 and DoDM 4120.24.

3.2 First article.
When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.2.

3.3 Recycled, recovered, environmentally preferable or biobased materials.
Recycled, recovered, or environmentally preferable, or biobased materials should be used to the maximum extent possible, provided the material meets or exceeds the operational and maintenance requirements and promotes economically advantageous to life cycle costs.

3.4 Materials.
Materials shall conform to the requirements of the TDP for the associated item, to subsidiary specifications and standards applicable thereto, and as specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:17Z
Check the source to verify that this is the current version before use.

3.4.1 Textiles.
Textile materials that are more than 3.5 years old (as evidenced by the date of manufacture marked on the rolls or containers, see 3.4.1.1) shall not be used in the fabrication of parachute assemblies. The Government reserves the right to examine the contractor's records to validate the age of textile materials and to reject assemblies, which use noncompliant materials.

3.4.1.1 Date of manufacture, textile.
The date of manufacture is defined as the last date which the textile materials have undergone a manufacturing operation that affects the physical characteristics of the material. Operations such as cutting, put-up, final inspection and packaging are examples of manufacturing operations that do not affect the physical characteristics of the material. To properly identify the age of textile materials for government use, the textile manufacturer shall place a tag on the finished goods identifying the specification to which the material is manufactured, the roll number from the lot, the lot number, and the date of manufacture.

3.4.1.2 Marking ink.
The ink for marking textile parachute assemblies shall be in accordance with A-A-59291 or as specified in the TDP for the associated item. Colors and types shall be specified in the TDP for the associated item. If a shade of a color is not specified in the TDP, the contractor may use any color shade as long as the nomenclature is legible.

3.4.2 Hardware.
Hardware parts utilized in the construction of the parachute assemblies and components shall conform to the TDP for the associated item.

3.5 Construction.
Details of construction shall be in accordance with MIL-DTL-7567, manufacturing specifications supplied by the procuring activity, the TDP for the associated item, and additional requirements specified herein (see 3.6).

3.5.1 Assembly aids.
Drilling, notches, stapling, gluing, basting or any other such techniques used as aids in the manufacturing process of parachutes shall be kept to a minimum, and the use thereof shall be restricted to the same limitations as marking (see 3.5.2). All assembly aids, such as staples, shall be removed during or after assembly. For Navy and Air Force procurements, hot glues are not authorized as an assembly aid. For Army procurements, use of assembly aids is prohibited in all types of harnesses, risers, or static lines, unless Government approval is requested and obtained as part of First Article component or material submission, on a contract-by-contract basis.

3.5.1.1 Basting.
Basting requirements shall be as specified in the TDP for the associated item or be in accordance with common industry practices. Basting stitches shall not be seen in the finished seam or assembly. Contractors unfamiliar with commercial practices shall contact the contracting officer for specific details prior to assembly of the item.

3.5.1.2 Hot glue.
NOTE: Army only: When permitted, use of hot glue as an assembly aid is restricted to only webbings, tapes or similar narrow fabrics. Use of hot glue is prohibited on cloth unless Government approval is requested and obtained as part of First Article component or material submission, on a contract-by-contract basis. When hot glue is used as a preassembly aid, a minimal quantity shall be used to prevent unnecessary stiffening of the assembly. Excess glue

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:17Z
Check the source to verify that this is the current version before use.

visible in the folds or layers of the material is not permitted.

3.5.1.3 Staples.
When staples are used as an assembly aid, a minimal quantity shall be used. Care shall be taken in choice of staple and application/removal method to reduce the potential of damage to the material.

3.5.2 Assembly markings.
Markings of pack, canopy, harness, riser, and other components as an aid to assembly, and to indicate stitching patterns, shall be accomplished in a manner that will not adversely affect the utility, strength, or appearance of the parachute.

3.6 Other construction details.
Specified below are other details of construction for canopy, harness, pack, and container:

3.6.1 Canopy.

3.6.1.1 Suspension lines.
Suspension lines shall be continuous and without splices or knots for each length specified by the TDP for the associated item. All lines from one canopy shall be made from the same manufacturer's lot of cord. Any line damaged during the process of canopy manufacture, regardless of fiber, shall be replaced with lines fabricated from cord of the same manufacturer.

3.6.1.1.1 Tensioning of suspension cord line.
When multiple pulley systems are used for tensioning, all lines for an entire canopy shall be measured at the same time and shall not be anchored at any intermediate point between the lines. The following suspension lines shall be marked under the specified tension unless otherwise specified in the TDP for the associated item:

Line	Conforming to	Tension
Nylon Cord	PIA-C-5040, Type III	20 ±1 pound
Nylon Cord	PIA-C-5040, Type II	10 ±0.5 pound

3.6.1.1.2 Checking of pulley systems.
Pulley systems used for tensioning lines during marking shall be checked each day to maintain specified tension of each line.

3.6.1.1.3 Marking of suspension lines.
Marking shall be done in a manner that ensures the final dimensions of the assembly or component meet the TDP for the associated item when measured within 30 ±5 seconds after the tension is applied.

3.6.1.2 Air permeability.
When tested in accordance with 4.6.1 and 4.7, complete canopies or pilot chutes shall have an average permeability of not more than 10 percent over the top limit or 10 percent below the lower limit of the fabric specification. The average air permeability reading for any one gore or cell shall not exceed the upper limit, nor be less than the lower limit of the fabric specification by over 20 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:17Z
Check the source to verify that this is the current version before use.

3.6.2 Harness, pack, and container.

3.6.2.1 Pull of ripcord.
The force required to operate the manual ripcord system of a packed parachute to cause positive opening of the parachute pack or container shall not exceed 27 pounds, or the requirements as established by the procuring activity and applicable technical documents, when tested in accordance with 4.6.2 and 4.7.2. This requirement is applicable to all ripcord-actuated parachute types.

NOTE: When stated limits are exceeded for Navy assemblies, the Naval Air Warfare Center, Code D555600 China Lake, CA facility shall be notified in addition to those agencies required by the contracting authority.

3.6.2.2 Parachute packs, container.
For packs or containers using the pack cone and grommet closure system, the system shall have sufficient clearance when the pack or container is closed so that the ripcord pins may be inserted without scoring or binding the grommets.

3.6.2.3 Parachute packs, containers.
For packs or containers that are closed using the method of lacing a pack-closed cord through grommets, the grommets shall be free of broken and sharp edges which tend to cut or abrade the lacing cord.

3.7 Identification of product.
Equipment, assemblies, and components shall be marked for identification in accordance with the TDP for the associated item or as specified in the following subparagraphs. In addition, the date of manufacture, providing the month and year of delivery to the procuring activity, shall be shown on each fabric component[1/]. The format of the date of manufacture shall be as follows: a text month followed by a four-digit year (example: JUNE 2006) or a two-digit month followed by a two- or four-digit year (example: 06/06 or 06/2006). The markings shall show the exact nomenclature followed by a space and the detailed information. Serial numbers for canopies and packs or deployment containers shall be furnished by the procuring activity (see 6.2).

NOTE: 1/ Army procurements require identification marking(s) only as specified in theTDP.

3.7.1 Pack or container.
When complete parachutes are procured, the contractor shall mark the pack or container in accordance with the TDP for the associated item.

3.7.2 Harness.
Except as otherwise specified, a label conforming to Type VI, Class 11, of MIL-DTL-32075, shall be affixed to each harness. The manner of application, size, and location of the label shall be as specified in the TDP for the associated item. The label shall contain the part number, contract number, manufacturer's code, and date of manufacture. Space shall be provided for entering the date placed in service (this will be filled in by the using service).

3.7.3 Riser.
The requirements of 3.7.2 shall apply to each riser of parachute assemblies, which is not designed with the risers as an integral part of the harness.


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:17Z
Check the source to verify that this is the current version before use.

3.7.4 Identification marking.

Each round canopy shall be marked for identification in accordance with Figure 1, unless otherwise stated in the TDP for the associated item. The characters shall be not less than 0.5 inch high. The type designation, if applicable and as specified in the TDP for the associated item, shall precede the drawing number. The using service will insert the date the canopy is placed in service.

3.8 Workmanship.

The parachute assemblies and components shall conform to the quality of product established by the specification and documents referenced herein.

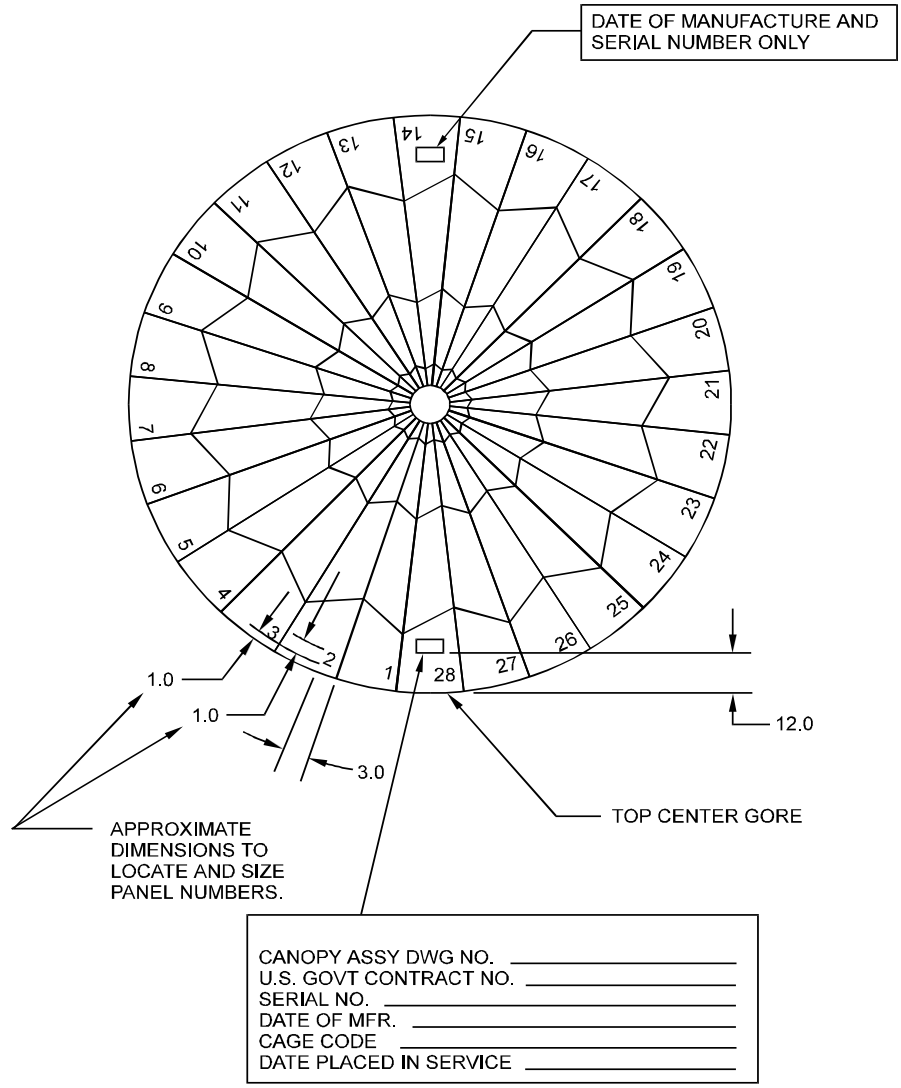

NOTE: CANOPY DIAGRAM IS FOR REFERENCE ONLY, SHOWING MANNER IN WHICH CANOPY IS MARKED. CANOPY SHAPE AND NUMBER OF GORES MAY VARY ACCORDING TO THE SPECIFIC MANUFACTURING SPECIFICATIONS.

DIMENSIONS IN INCHES.

FIGURE 1. Parachute identification marking requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:17Z
Check the source to verify that this is the current version before use.

4. VERIFICATION

4.1 Classification of inspections.
The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).
b. First article inspection (see 4.3).
c. Conformance inspection (see 4.4).

4.2 Qualification inspection.
Assemblies submitted for qualification shall be inspected (see 3.1) to verify the requirements of the TDP for the associated item. Any defects, major or minor, as specified in MIL-STD-849, unacceptable workmanship, or other nonconformance shall be cause for rejection of the qualification sample.

4.3 First article inspection.
First article inspection shall be performed on one complete parachute assembly, unless otherwise stated in the contract, when a first article sample is specified (see 3.2 and 4.4.1.1). The inspection shall include the tests and examinations in accordance with 4.4.1, 4.4.2, 4.5, and 4.6. Any defect or nonconformance shall be cause for rejection of the first article.

4.4 Conformance inspection.
Conformance inspections shall include the examination in accordance with 4.4.1, 4.4.2, and 4.5, and the tests of 4.6 (as required, see 6.2). Sampling plans and acceptance/rejection criteria for the inspections of 4.4.2, 4.5, and 4.6 shall be as specified in the contract or purchase order. Parachute assemblies, which fail the acceptance criteria shall be cause for rejection of the lot.

4.4.1 Component and material inspection.
Components, materials, test reports and certifications shall be inspected in accordance with all the requirements of referenced documents and specifications unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document. Materials, test reports and certifications shall be taken from the same supplier lots used to manufacture the associated components (see 3.1.2).

4.4.1.1 First article inspection samples.
The first article sample shall be accompanied by the following items with affidavits of the source of supply of each item: 5 yards of each color and type of broad cloth; 0.5 pound spool, cone, or tube of each color and type of thread; 30 yards of each color and type of cord, webbing, and tape; two pieces of each type of hardware, and two of any miscellaneous item such as stiffeners, zippers, etc., used in the construction and components of the parachute assembly and components. The samples and all associated documentation shall be taken from the same supplier lots used to manufacture the qualification inspection sample. The samples shall comply in all respects with the requirements specified herein.

4.4.2 In-process inspection.
Inspection of subassemblies shall be made to ascertain that construction details and dimensional requirements, which cannot be examined in the finished product, are in accordance with specified requirements. The Government reserves the right to exclude from consideration of acceptance any material or service for which in-process inspection has indicated nonconformance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:17Z
Check the source to verify that this is the current version before use.

4.5 Examinations.
The parachute assemblies shall conform to the visual and dimensional examinations as specified in the TDP for the associated item. Deviations from the TDP shall be classified in accordance with MIL-STD-849.

4.6 Tests.

4.6.1 Air permeability.
Canopies and pilot chutes shall be subjected to the applicable air permeability test in accordance with 4.7 when specified in the contract or purchase order (see 6.2). Specific instructions shall be provided for pilot chute porosity testing upon request (see 4.7.1).

4.6.2 Ripcord pull.
Parachute assemblies shall be subjected to the applicable pull test in accordance with 4.7.2 when specified in the contract or purchase order (see 6.2).

4.7 Test methods.
Unless otherwise specified, the testing shall be as follows:

4.7.1 Air permeability, round.
The cloth of completed parachute canopy assemblies shall be tested for air permeability to determine compliance with the requirements of 3.6.1.2. The test shall be performed in accordance with ASTM D737, making five permeability readings (a minimum of one reading per section excluding the top) in every fourth gore starting with gore number 1; that is, gore numbers 1, 5, 9, etc. Each reading shall be taken at the approximate center, horizontally and vertically, of the gore section. The pilot chutes procured as separate items or as part of the parachute canopies or assemblies shall be subject to this permeability testing requirement, except that the number and locations of the readings shall be as specified by the procuring activity.

4.7.1.1 Air permeability, gliding.
The cloth of completed gliding type canopy assemblies shall be tested for air permeability requirements of 3.6.1.2. The test shall be performed in accordance with ASTM D737. Readings shall be randomly taken on the top and bottom panels of each cell -- two readings per top and bottom panel (see Figure 2).

4.7.2 Ripcord pull.
Parachute assemblies (or pack/container assemblies when procured separately) shall be tested for compliance with the requirements of 3.6.2.1. Prior to commencing the tests for parachutes equipped with an elastic or spring ripcord grip pocket, the ripcord grip shall be inserted in the elastic ripcord grip pocket and withdrawn with a twisting motion five times to flex the pocket. Items selected for testing shall be packed, as for service, strictly in accordance with instructions furnished by the procuring activity (see 6.2 and 6.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:17Z
Check the source to verify that this is the current version before use.

4.7.2.1 Chest-style or type parachute.
Except that a rigger's seal shall not be affixed, the parachute shall be packed in accordance with the applicable packing instructions. The parachute shall be placed in a test fixture to hold it securely in a position with the mouth of the ripcord pocket facing downward (along the vertical axis). Unless otherwise specified by the procuring activity, a 27-pound weight attached to the ripcord grip shall readily activate the parachute by withdrawing the ripcord pins from the locking cones.

CAUTION: CARE SHALL BE EXERCISED TO CENTER THE WEIGHT ON THE GRIP AND NOT TO IMPOSE AN IMPACT LOAD.

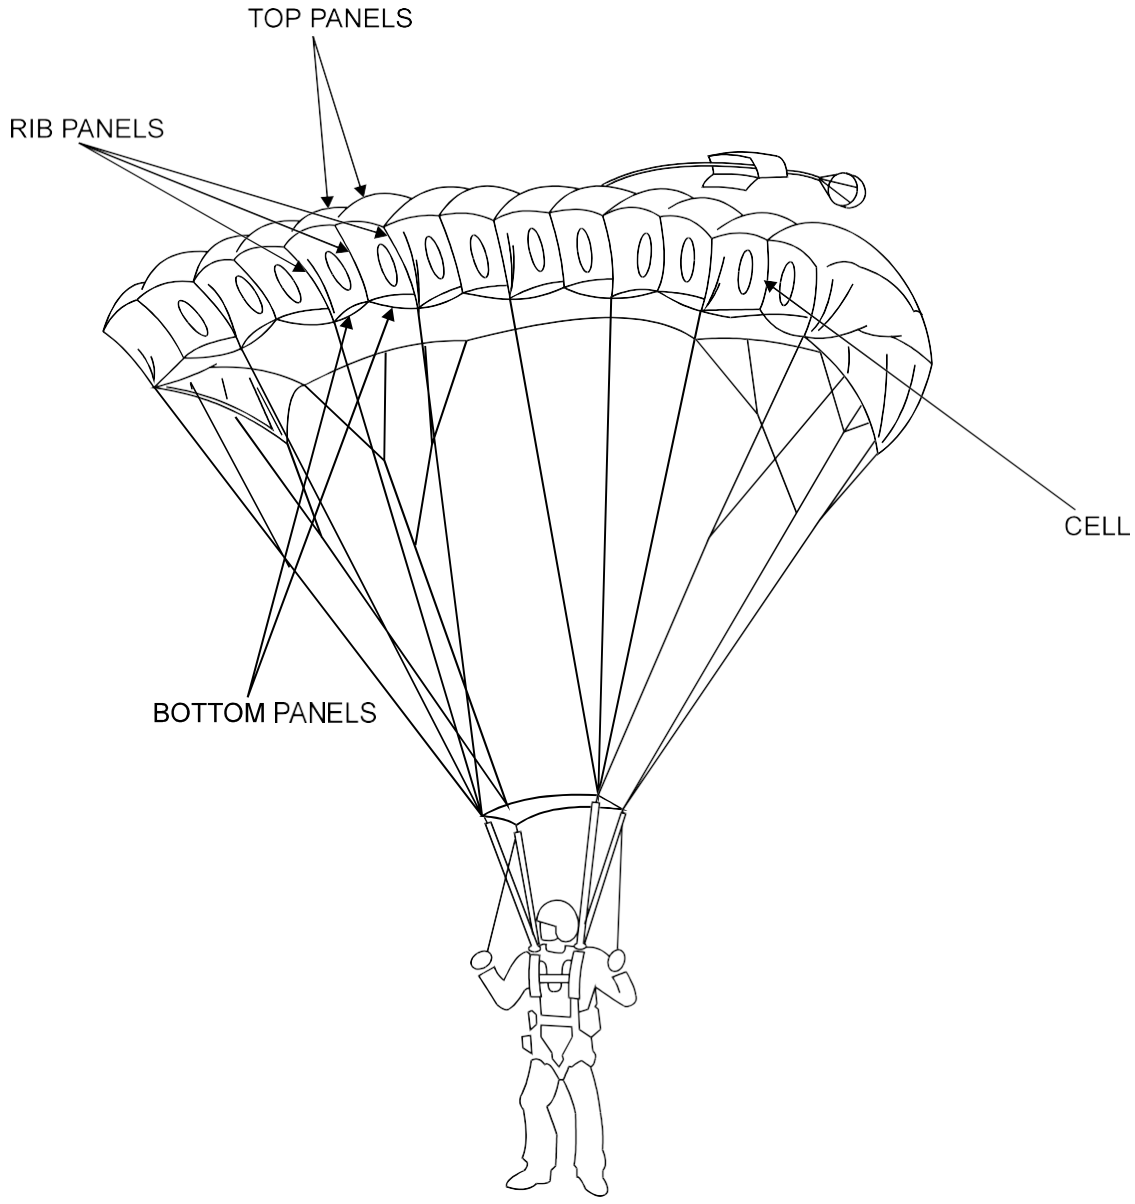


FIGURE 2. Pictorial view of a gliding canopy (7 cell).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:17Z
Check the source to verify that this is the current version before use.

4.7.2.2 Back and seat style or type parachute.
The parachute shall be packed in accordance with the applicable packing instructions and placed in a test fixture or anthropometric device (torso) simulating the 5 to 95 percentile male or live subject to hold it securely in a position with the mouth of the pocket or ripcord guide facing downward (along the vertical axis). The ripcord cable shall be secured so that the ripcord pins will not be withdrawn when the weight is applied. A 20-pound weight attached to the ripcord grip (care shall be exercised not to impose an impact load) shall readily withdraw the ripcord from the pocket or the guide. The parachute shall then be rotated so that the open end of the ripcord housing will be facing downward with the ripcord cable in a vertical position. A 27-pound weight shall be attached to the ripcord grip, which has been removed from the ripcord pocket or guide.

The safety on the ripcord cable shall be removed and the weight shall readily activate the parachute by withdrawing the ripcord pins from the locking loops of the locking cones' webbing.

4.7.2.3 Metal grip socket or clips.
Parachutes with mechanical grip sockets shall be tested as specified in 4.7.2. However, insertion and withdrawal of the grip (five times) prior to test is not required.

4.7.2.4 Manual system actuation.
When the manual system of a parachute assembly is actuated during a test, the procuring activity may specify a follow-on required function of the system after the manual function (i.e., complete separation of the grommets from the cones or the pilotchute spring extended, after a ripcord pin pull).

5. PACKAGING

5.1 Packaging.
For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES
(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use.
The parachute assemblies and components covered by this specification are intended for use by personnel making premeditated jumps or for emergency escape from airborne military vehicles. Assemblies tethered or controlled from the ground or water surface, and used as ground/air training simulators, are included within the scope of this specification.

6.2 Acquisition requirements.
Acquisition documents should specify the following:

a. Title, number, and date of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:17Z
Check the source to verify that this is the current version before use.

b. When qualification is required (see 3.1).
c. Part number (see 3.1.6).
d. When first article is required (see 3.2)
d. Serial numbers, if required (see 3.7).
e. Sampling plan (see 4.4).
f. Air permeability test, if required (see 4.6.1, 4.7.1, 4.7.1.1).
g. Ripcord pull test, if required (see 4.6.2, 4.7.2).
h. Packing instructions, if required (see 4.7.2).
i. Packaging requirements (see 5.1).

6.3 Drop test.
Parachute assemblies with defects of a nature which, in the judgement of the qualifying activity, could result in a malfunction may, at the option of the procuring activity, be subjected to a drop test. An example would be:

a. Torso dummy weight - 250 pounds.
b. Altitude1/ - 1,500 feet above certain terrain2/.
c. Packing - Standard, as for service use, per applicable packing instructions.
d. Airspeed - 170 knots indicated airspeed.

NOTE:
1/ Parachute should be fully deployed within the first 200 feet.
2/ Pressure altitude should not exceed 5,000 feet.

6.4 Qualification.
With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Products List QPL No. 6645, whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from AFLCMC/WNUS, 235 Byron St., Suite 19A, Robins AFB GA, 31098-1640. An online listing of products qualified to this specification may be found in the Qualified Products Database (QPD) at https://assist.dla.mil.

6.4.1 Qualification planning.
Manufacturers should be aware that the qualification process is often iterative and can vary greatly depending on the quality and completeness of the submission package. Follow-ups for correction or clarity in the submission can result in the qualification process taking much longer than the 6 months permitted for initial qualification examination (see 3.1.7). Manufacturers should plan the quality and timing of their QPL submission package accordingly.

6.4.2 Qualification test report.
Upon application for qualification, applicants will be requested to provide a test report which,

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:17Z
Check the source to verify that this is the current version before use.

includes details indicating compliance or noncompliance with each requirement of this specification by paragraph and the applicable TDP for the associated item. MIL-HDBK-831 should be used as guidance in preparing the test report.

6.5 Ripcord pull.
Requirements for ripcord pull tests covered by this specification should be specified by the procuring activity (see 6.2).

6.6 Automatic openers.
Automatic openers are not covered under this specification.

6.7 Subject term (keyword) listing.

Aerodynamic
Canopy
Decelerators
Drag producing devices

6.8 Changes from previous issue.
Marginal notations are not used in this version to identify changes with respect to the previous issues due to the extent of the changes.

CONCLUDING MATERIAL

Custodians:
Army - GL
Navy - AS
Air Force - 11

Preparing Activity:
Air Force - 11

Project (1670-2014-002)

Review Activity:
DLA - GS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:17Z
Check the source to verify that this is the current version before use.