MIL-L-6617C
1 November 1977
SUPERSEDING
MIL-L-6617B
26 September 1960

MILITARY SPECIFICATION

LIGHT, TRAFFIC, AIRCRAFT TYPE B-2

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of aircraft traffic light, designated Type B-2.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

W-C-440	- Clips, Electrical, General Specification for.
W-C-596/3	- Connector, Plug, Electrical, General Purpose, 2 Pole, 2 Wire, 15 Amperes, 125 Volts.

MILITARY

MIL-V-173	- Varnish, Moisture-and-Fungus-Resistant (for Treatment of Communications, Electronic, and Associated Equipment).

FSC 6210

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:15Z
Check the source to verify that this is the current version before use.

MIL-P-514	- Plates, Identification, Instruction and Marking, Blank.
MIL-C-5015	- Connectors, Electrical, Circular Threaded AN Type, General Specification for.
MIL-E-5558	- Enamel; Wrinkle-Finish, for Aircraft use.
MIL-C-5756	- Cable and Wire, Power, Electric, Portable.
MIL-E-7851	- Enamel; Wrinkle-Finish, for Aircraft use, Application of.
MIL-C-7989	- Covers, Light-Transmitting, for Aeronautical Lights, General Specification for.
MIL-F-14072	- Finishes for Ground Signal Equipment.
MIL-E-17555	- Electronic and Electrical Equipment, Accessories, and Repair Parts; Packaging and Packing of.
MIL-C-25050	- Colors, Aeronautical Lights and Lighting Equipment, General Requirements for.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-810	- Environmental Test Methods.
MS-3102	- Connector, Receptacle, Electric, Box Mounting, Solder Contacts, AN Type.
MS 24523	- Switch, Toggle, One Pole, Environmentally Sealed.

(Copies of specification and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:15Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

SAE Handbook.

(Application for copies should be addressed to the Society of Automotive Engineers, 400 Commonwealth Drive, Warrendale, PA 15086.)

SOUTHERN CALIFORNIA AIR POLLUTION CONTROL DISTRICT

Rule 102 - Photochemically Organic Solvents.

(Application for copies should be addressed to the Southern California Air Pollution Control District, 434 So. San Pedro Street, Los Angeles, CA 90013.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Description. The light, designed for two-handed operation, shall be similar to that shown on Figure 1 (see 6.4), and as specified herein.

3.2 First article (first-produced light). The contractor shall furnish one or more lights as specified (see 6.2) for examination and testing within the time frame specified (see 6.2) to prove that his production methods and choice of design detail will produce lights that comply with the requirements of this specification. Examination and tests shall be as specified in Section 4 and shall be subject to surveillance and approval by the Government (see 6.3).

3.3 Material. Material shall be as specified herein. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 6.5).

Source: https://assist.dla.mil -- Downloaded: 202610-17T07:15Z
Check the source to verify that this is the current version before use.

3.4 Environmental conditions. The light shall perform as specified herein in any ambient temperature from plus 55° C to minus 54° C at a relative humidity (rh) of up to 100 percent with condensation and with sand and dust conditions as encountered in arid regions.

3.5 Performance.

3.5.1 Light distribution. The light distribution in both horizontal and vertical planes, with the lamp specified in 3.6.1.4 operated at 70 spherical candlepower, without color filter but with cover lens, shall be not less than the minimum values shown on Figure 2. The light shall withstand the strains, jars, vibrations, and other conditions incident to shipping, storage, installation, and service.

3.6 Construction.

3.6.1 Optical system. The optical system shall be the fixed, pre-focus type requiring no focusing by personnel of the operating units. A rigid base plate shall be used to support the parabolic reflector assembly, lamp and filter holder, filter changing mechanism, and the two handles. The parabolic reflector shall be mounted in a support rigidly fastened to the base plate, separate from the drum. The drum shall be so arranged that it may be removed from the base plate without disturbing the assemblies thereon. Provisions for making adjustments during manufacture may be utilized if the adjustments are rigidly locked in place and will not be disturbed during routine maintenance.

3.6.1.1 Principal reflector. The principal reflector shall be a parabolic precision mirror of silver-backed glass. The silver coating shall be protected by backing material and coats of paint. The reflector shall be so mounted that it is not subjected to undue strain and is protected from contact with metal.

3.6.1.2 Auxiliary reflector. A metal spherical reflector shall be so mounted in the light that the focus of the spherical reflector, the axis of the lamp, and the focus of the parabolic reflector coincide. The overall diameter of the spherical reflector and mounting shall be such that no direct light from the lamp is emitted. The spherical reflector shall be no larger than necessary to prevent emission of direct light.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:15Z
Check the source to verify that this is the current version before use.

3.6.1.3 Filters. The light shall be provided with one aviation red and one aviation green color filter. The filters shall be heat-resistant glass conforming to MIL-C-7989, Class B. The color transmission of the filters shall conform to MIL-C-25050, Type I, (a) Aviation Red and (c) Aviation Green. The filters shall be correctly positioned and firmly held in the light by a holder designed to minimize breakage of the filters. When either filter is positioned between the lamp and principal reflector, all light from the lamp incident upon the reflector shall pass through the filter.

3.6.1.3.1 Filter selector. A device shall be provided to control the position of the color filters. The device shall produce a white signal and shall allow positive selection of either a red or green signal, as desired. Positive stops shall be provided in order that the possibility of transmitting a mixture of two colored signals at one time is eliminated. The device shall be so arranged that the selected filter is held automatically in the proper position to produce the desired color. The device shall be operated from the front cylindrical handle by rotating that handle.

3.6.1.4 Lamp. The light shall utilize a 50-candlepower, 6- to 8-volt (V) RP-11 clear bulb, C-6 filament, 200-hour life, 7/8-inch light center length, 2-1/4-inch maximum overall length, single-contact prefocused base lamp, designation No. 1501 or equal. The lamp shall be accurately positioned and securely held in the light by a socket of the prefocus type. Unless otherwise specified (see 6.2), a lamp shall be installed and furnished with the light.

3.6.1.5 Housing. The optical system shall be enclosed in a housing fabricated of aluminum. The housing shall be rigid and strong enough to protect and support components mounted on or within the housing.

3.6.1.5.1 Cover. A clear cover shall be provided at the front of the housing. The cover shall be plastic conforming to MIL-C-7989, Class D. The color and transmission of the cover shall be aviation white conforming to MIL-C-25050, Type I, (e) Aviation White.

3.6.1.5.1.1 Holder. The cover shall be firmly held in a holder designed to fit on the front of the housing. This holder and cover assembly shall allow quick removal of the assembly without the use of tools.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:15Z
Check the source to verify that this is the current version before use.

3.6.1.5.2 Connector. An MS-3102 connector socket conforming to MIL-C-5015 for connection to the leads specified in 3.6.5.3 and 3.6.6 shall be located at the approximate midpoint of the base of the traffic light.

3.6.1.6 Color indicator. A plastic prism device shall be provided at the front of the light to redirect a small part of the main beam to the operator's eye. The color indicator shall be of sufficient brightness that an operator with normal vision can distinguish the color of the filter in use in bright daylight. A dimming method shall be provided to regulate this color-indicating beam if the redirected light is too bright for comfortable use at night.

3.6.2 Sighting device. A sighting device with front and rear sights shall be provided along the top of the light so that the light can be properly aimed. The centerline of the sight shall be parallel to the optical axis of the light.

3.6.3 Handles. Two handles as shown on Figure 1 shall be provided. The front handle shall be cylindrical in shape and shall be rotatable.

3.6.4 Hanger. A yoke-type hanger or other means shall be provided so that the light can be suspended from an overhead wire. The axis of the housing shall be essentially parallel to the ground when the light is hanging from the overhead wire. Yoke-type hangers shall be readily removable from the light.

3.6.5 Transformer. A two-coil isolating transformer shall be provided in order that the light can be operated from a commercial 50/60-Hertz 120V source. The transformer shall have a minimum rating of 50 Volt-amperes (VA) and shall be weatherproof. With 120V, 50/60-Hertz current applied to the primary, and with the specified lamp and lead installed, the transformer shall supply a voltage of 7 $\pm$ 0.1V at the lamp. The temperature rise of the transformer as determined by the resistance method shall not exceed 65° C when operating continuously at rated load and voltage. The transformer case shall have at least two holes for 1/4-inch mounting bolts. The dielectric strength between winding and case and between windings shall be satisfactory when tested at 1000V.

3.6.5.1 Fuse. A small fuse, enclosed so that it is waterproof, shall be provided in the transformer secondary circuit. The fuse shall be rated at 32V, 10 amp. The fuse shall be easily accessible for changing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:15Z
Check the source to verify that this is the current version before use.

3.6.5.2 Primary lead. The primary lead of the transformer shall be 2-conductor, 16-AWG cable conforming to MIL-C-5756. One end of the cable shall be permanently connected to the transformer and the other end shall terminate in a two-pole, parallel-blade connector conforming to W-C-596/3-2. The length of the lead shall be 3 feet.

3.6.5.3 Secondary lead. The secondary lead from the transformer to the light shall be 2-conductor, 16-AWG cable conforming to MIL-C-5756. One end of the cable shall be permanently connected to the transformer, and the other end shall terminate in an AN-type straight connector plug conforming to MIL-C-5015 and shall be compatible with the connector socket on the light. The length of the lead shall be 20 feet.

3.6.6 Auxiliary lead. An auxiliary lead shall be furnished for emergency operation of the light from a battery. The lead shall be a 2-conductor, 16-AWG cable conforming to MIL-C-5756. One end of the cable shall terminate in an AN-type straight connector conforming to MIL-C-5015 and shall be compatible with the connector socket on the light. The other end of the cable shall have the cable sheath removed, freeing 12-inch lengths of the two insulated conductors. Each conductor shall terminate in a spring clip conforming to W-C-440, Type PC for connection to the terminals of a storage battery. The length of the lead shall be 10 feet.

3.6.7 Switch. The switch, which controls the operation of the lamp, shall be located on or near the rear (pistol grip) handle in such a position that it may be easily operated by a finger of the hand holding the rear handle. The switch shall be a single-pole, normally-open, momentary-contact switch conforming to MS 24523-30.

3.6.8 Dimensions. The overall length of the housing shall be not more than 15 inches and the diameter shall be not more than 9 inches. The overall height, from the top of the housing to the bottom of the pistol grip, shall be not more than 16-1/2 inches.

3.6.9 Weight. The weight of the light, without leads, shall be not more than 8 pounds.

3.7 Fungus and moisture resistance. The electrical circuitry, including all components and connections, except as specified below, shall be protected from the effects of fungus growth and moisture by an overall

Source: https://assist.dla.mil -- Downloaded: 202610-17T07:15Z
Check the source to verify that this is the currentversion before use.

treatment with a varnish conforming to MIL-V-173, Composition I or II, as applicable (see 3.7.1), with 1 percent copper 8-quinolinolate (by weight) based on the nonvolatile content of the varnish.

(a) Components or circuit elements that are inherently fungus and moisture resistant or which are hermetically sealed need not be treated.

(b) Components or circuit elements whose functions will be adversely affected by the varnish coating shall not be treated.

When used, the varnish shall be applied by spray, brush, or a combination of both to give a dry-film thickness of not less than 1 mil to component or element surfaces previously cleaned and prepared so that the surfaces are free from all foreign matter which would interfere with the adherence or function of the varnish.

3.7.1 Composition. Composition II shall be used only in the case when local air pollution regulations governing the application of varnish precludes the use of Composition I. When Composition II is used, the contractor shall provide evidence to the Government that the use of Composition II is required, and shall certify that the Composition II material complies with Rule 102, Southern California Air Pollution Control District.

3.8 Identification marking. The light shall be identified in accordance with MIL-STD-130. The marking shall be applied to the light on plates conforming to MIL-P-514, Type III, Composition C, of Type I, Grade A, Class 1 material. Each plate shall be attached by screws, bolts, or rivets in a location where the plate will be both visible and legible.

3.9 Instruction plates. Each light shall be equipped with an instruction plate describing operation, method of changing filter, and aiming. Instruction plates shall conform to MIL-P-514, Type III, Composition C, of Type 1, Grade A, Class 1 material. Each plate shall be attached by screws, bolts, or rivets in a location where the plate will be both visible and legible.

3.10 Treatment and painting. Unless fabricated from corrosion-resistant material, all metal parts shall be protected against corrosion with a finish conforming to MIL-F-14072, Type II. The following additional finishes shall be provided.

Source: https://assist.dla.mil -- Downloaded: 202610-17T07:15Z
Check the source to verify that this is the current version before use.

3.10.1 Housing exterior. The exterior surface of the housing shall be finished with enamel conforming to MIL-E-5558, Type I, Color No. 515 Gloss Black, and applied in accordance with MIL-E-7851.

3.10.2 Housing, interior and supporting parts. The interior area of the housing and metal parts supporting the lamp and auxiliary reflector shall be finished with lusterless black enamel conforming to MIL-B-14072, Film Designation B, or as specified in 3.10.1.

3.11 Workmanship. All parts, components, and assemblies of the light shall be clean of harmful extraneous material such as sand, dirt, sprues, scale, and flux. Rework shall be limited to procedures which do not reduce mechanical properties or affect function.

3.11.1 Metal fabrication. Metal used in fabrication shall be free from kinks and sharp bends. The straightening of material shall be done by methods that will not cause injury to the material. Corners shall be square and true. All bends shall be made with controlled means to insure uniformity of size and shape. External surfaces shall be free of burrs, sharp edges, and corners, except when sharp edges or corners are required or where they are not detrimental to safety.

3.11.2 Riveted connections. Rivets shall fill the holes completely. The upset rivet heads shall be full, neatly made, concentric with the rivet holes, and in full contact with the surface of the member, and shall be in accordance with SAE J492.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 202640-17T07:15Z
Check the source to verify that this is the currentversion before use.

4.1.1 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards, as applicable.

4.2 Classification of inspections. Inspection requirements specified herein are classified as follows:

(a) First-produced light inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).
(c) Inspection of packaging (see 4.6).

4.3 First-produced light inspection.

4.3.1 Examination. The first-produced light shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Tests. The first-produced light shall be tested as specified in 4.5.2.1 through 4.5.2.6. Failure of any test shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for examination and tests shall be in accordance with MIL-STD-105.

4.4.2 Examination.

4.4.2.1 Samples. Samples selected in accordance with 4.4.1 shall be examined for the major and minor defects specified in 4.5.1. AQL shall be 2.5 percent defective for major defects and 4.0 percent defective for minor defects.

4.4.3 Test.

4.4.3.1 Samples. Samples selected in accordance with 4.4.1 shall be tested as specified in 4.5.2.2 through 4.5.2.5. AQL shall be 4.0 percent defective.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:15Z
Check the source to verify that this is the current version before use.

4.5 Inspection procedure.

4.5.1 Examination. The lights shall be examined as specified herein for the following defects:

Major

101. Material not as specified.
102. Components missing or not as specified.
103. Dimensions not as specified.
104. Weight not as specified.
105. Treatment and painting not as specified.
106. Workmanship not as specified.

Minor

201. Identification marking missing, incomplete, or illegible.
202. Instruction plates missing or not as specified.

4.5.2 Tests.

4.5.2.1 Environmental.

4.5.2.1.1 High temperature. The light shall be tested as specified in MIL-STD-810, Method 501.1, Procedure II, Steps 1, 2, 7, and 8, at a temperature of plus 55° C plus or minus 2° C for a period of 4 hours. While still at this temperature operate the light as specified in 4.5.2.2. Nonconformance to 3.4 shall constitute failure of this test.

4.5.2.1.2 Low temperature. The light shall be tested as specified in MIL-STD-810, Method 502.1, Procedure I, Steps 1, 4, and 5, at a temperature of minus 54° C plus or minus 2° C for a period of 12 hours. While still at this temperature operate the light as specified in 4.5.2.2.2. Nonconformance to 3.4 shall constitute failure of this test.

4.5.2.1.3 Humidity. The light shall be tested as specified in MIL-STD-810, Method 507.1, Procedure III, Steps 1, 5, 8, and 11, except that the exposure period shall be 6 hours, temperature plus 40° C, and the relative humidity 100 percent. Nonconformance to 3.4 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 202610-17T07:15Z
Check the source to verify that this is the currentversion before use.

4.5.2.1.4 Sand and dust. The light shall be tested as specified in MIL-STD-810, Method 510.1, Procedure I. Nonconformance to 3.4 shall constitute failure of this test.

4.5.2.2 Operation. Operate the light by operating all controls and positioning the color filter. Evidence of controls not working or color filters not positioning correctly shall constitute failure of this test.

4.5.2.3 Photometry. The light shall be operated to determine photometric compliance with light distribution requirements of 3.5.1 and color filter requirements of 3.6.1.3. Failure to meet photometric, color and filter requirements specified shall constitute failure of this test.

4.5.2.4 Focus. The light shall be tested to determine the accuracy of the focusing of the parabolic and spherical reflectors. A screen with four holes, as shown on Figure 3, shall be placed over the end of the light. If the focusing is correct, the center of the images as shown on Figure 3 shall have the same spacing as the holes in the first screen. At each point, two images shall be superposed, one of which is caused by the spherical reflector and the other by the parabolic reflector. If the two sets of images are not superposed with the correct spacing, the focusing is incorrect and shall constitute failure of this test.

4.5.2.5 Sights. Using the sighting device, train the light beam upon a 3- by 3-foot target located not less than 400 feet distant. Inability to impinge any portion of the main light beam upon the target shall constitute failure of this test.

4.5.2.6 Transformer. Test the transformer as follows:

(a) Determine the secondary output voltage at the lamp.
(b) Apply a potential of 1000V root mean square (rms), 60 Hertz for a period of 1 minute between windings and between each winding and core.
(c) Determine the temperature rise when operating continuously at rated load and voltage.

Any breakdown in insulation or nonconformance to 3.6.5 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 202640-17T07:15Z
Check the source to verify that this is the current version before use.

4.6 Inspection of packaging. Inspection of the preservation, packing, and marking shall be in accordance with the quality assurance provisions of MIL-E-17555. The marking shall be examined to determine if any marking is illegible, incorrect, incomplete, or missing.

5. PACKAGING

5.1 Preservation, packing, and marking. Preservation shall be Level A or Commercial, and packing shall be Level A, Level B, or Commercial, as specified (see 6.2). Level A preservation, Level A or B packing, and military packaging marking shall be in accordance with MIL-E-17555, except that only wood containers shall be used for Level A packing. Commercial preservation and packing shall be in accordance with Level C requirements of MIL-E-17555. Commercial packaging marking shall reflect as a minimum, the item name, national stock number, quantity, contract or purchase order number, and appropriate address markings. The marking shall be applied with a waterproof material, shall be legible, and shall provide a definite contrast.

6. NOTES

6.1 Intended use. The Type B-2 lights are intended to be used in permanent or mobile air traffic control towers to control air traffic in the event radio transmission is not available.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Time frame required for submission of first-produced lights and number of lights required (see 3.2).
(c) When lamps shall not be installed and furnished with the lights (see 3.6.1.4).
(d) Degree of preservation and degree of packing required (see 5.1).

6.3 First-produced light. Any changes or deviations of production lights from the approved first-produced light during production will be subject to the approval of the contracting officer. Approval of the first-produced light will not relieve the contractor of his obligation to furnish lights conforming to this specification.

Source: https://assist.dla.mil -- Downloaded: 202640-17T07:15Z
Check the source to verify that this is the current version before use.

6.4 Information figures. Figure 1 shows a type of light which has been found acceptable; however, the figure is included for illustration only and is not intended to preclude the furnishing of another light which conforms to this specification.

6.5 Recycled material. It is encouraged that recycled material be used, when practical, as long as it meets the requirements of this specification.


Custodians:
Army - ME
Navy - AS

Preparing activity:
Army - ME

Review activity:
DLA - GS

Project No. 6210-0505

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:15Z
Check the source to verify that this is the current version before use.

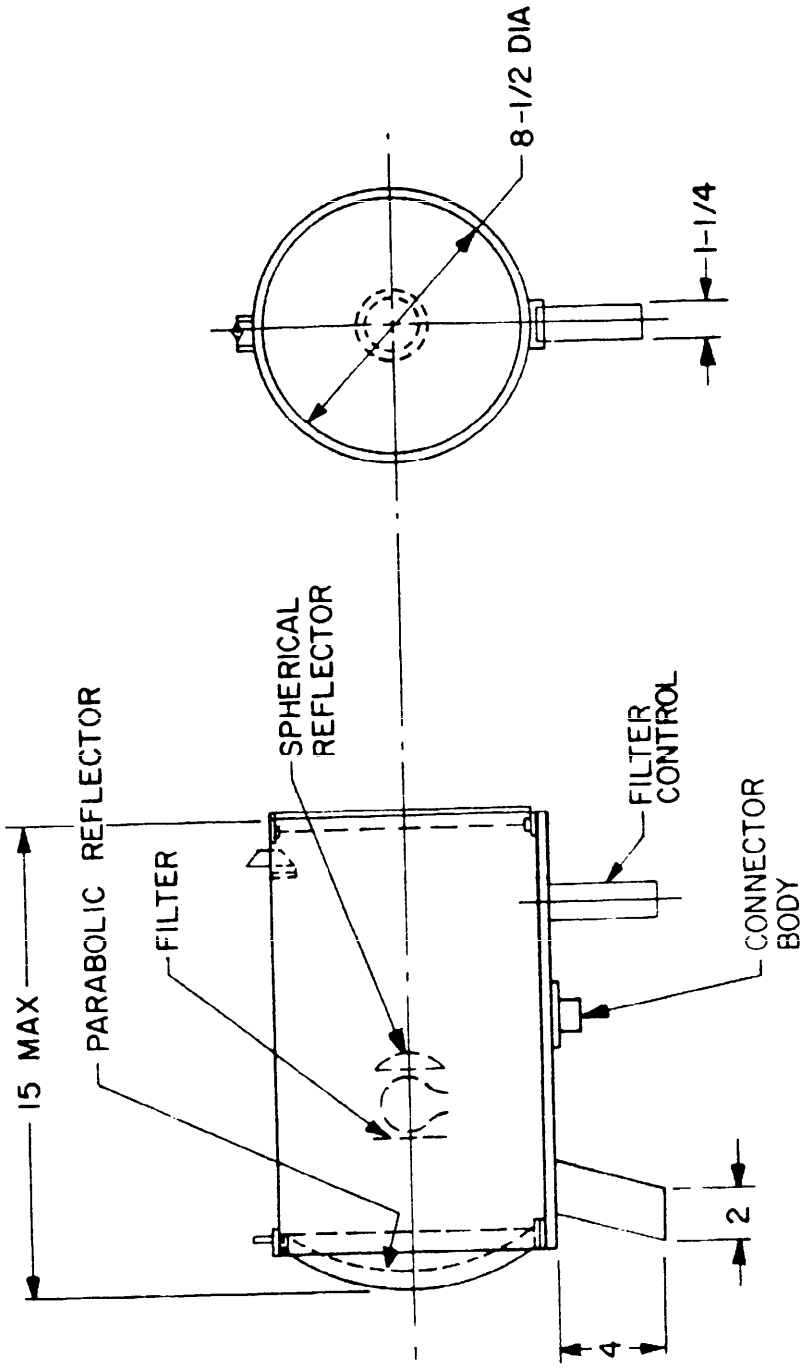

X-3943

FIGURE 1. Light.

NOTES:
1. DIMENSIONS ARE IN INCHES
2. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± 1/64

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:15Z
Check the source to verify that this is the current version before use.

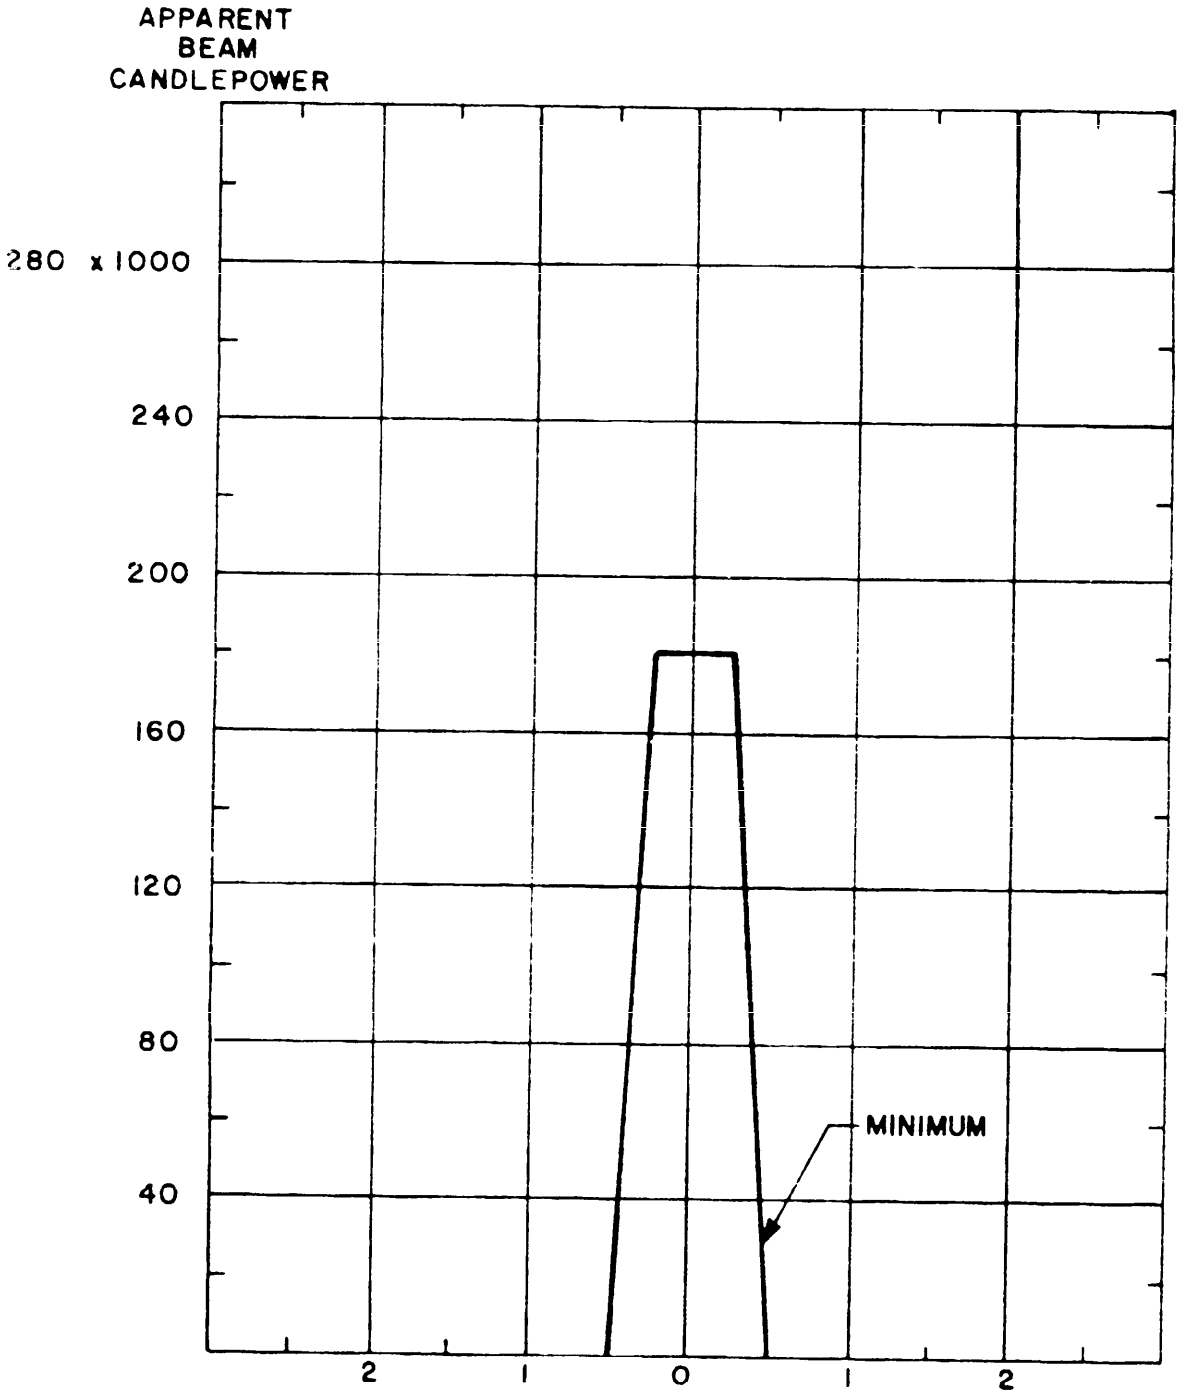


FIGURE 2. Rotation in degrees.

X-3944

Source: https://assist.dla.mil -- Downloaded: 202610-17T07:15Z
Check the source to verify that this is the current version before use.

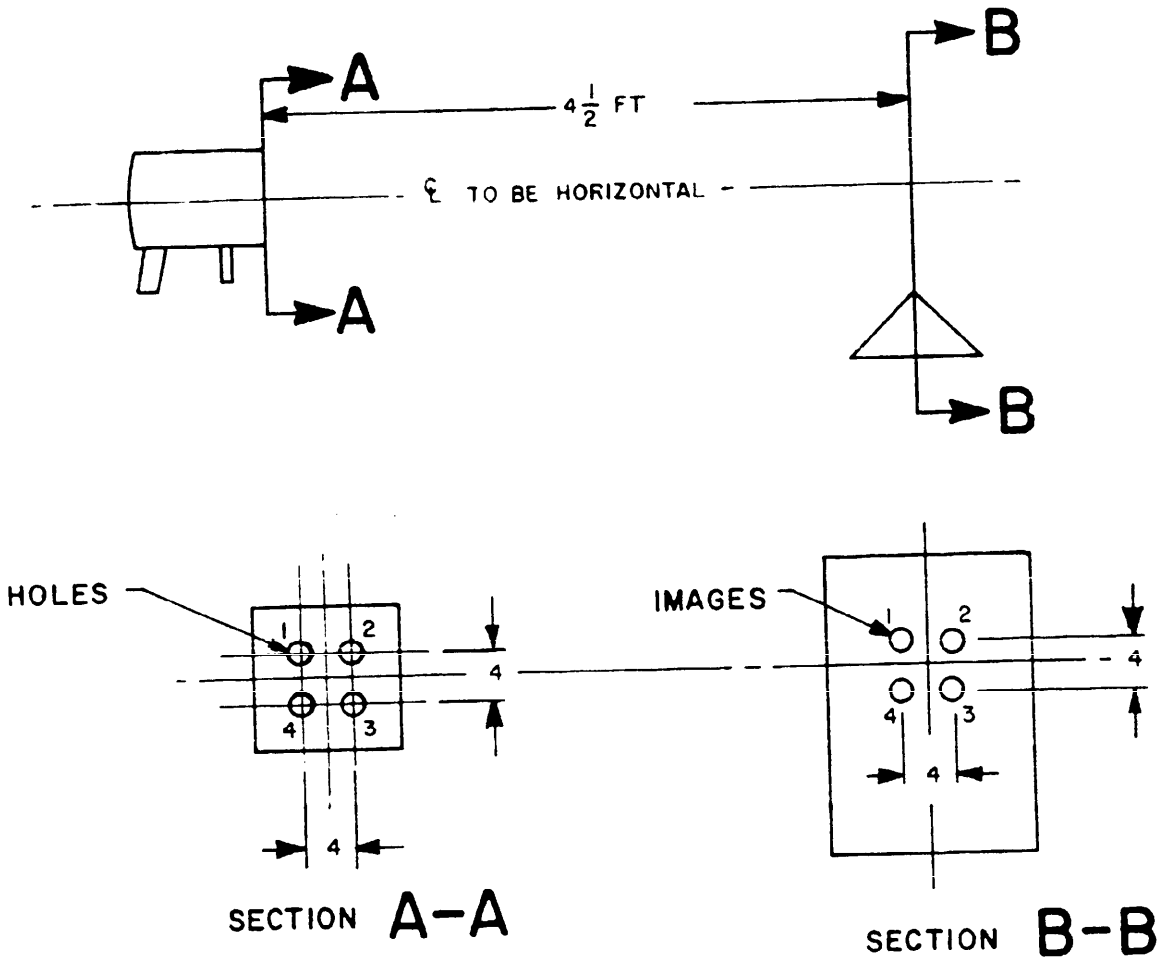


FIGURE 3. Test of focus.

X-3945

Source: https://assist.dla.mil -- Downloaded: 202610-17T07:15Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER (Number) AND TITLE

MIL-L-6617C Light, Traffic, Aircraft Type B-2

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY (Printed or typed name and address - Optional)	TELEPHONE NO
	DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 202640-17T07:15Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Mobility Equipment Research and
Development Command
ATTN: DRDME-DS
Ft. Belvoir, VA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:15Z
Check the source to verify that this is the current version before use.