INCH-POUND

MIL-T-6598F
15 October 1994
SUPERSEDING
MIL-T-6598E
15 October 1978

MILITARY SPECIFICATION

TRANSMITTER, RATE OF FLOW, FUEL SYNCHRO STYLE, TYPE J-6A

This specification is approved for use by all Department and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of remote indication synchro style fuel flow rate transmitter, designated type J-6A

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

PPP-B-1672	Boxes, Shipping, Reusable With Cushioning

MILITARY

MIL-P-116	Preservation, Methods Of
MIL-B-121	Barrier Material, Greaseproofed, Waterproofed, Flexible
MIL-T-5350	Transmitters, Synchro Operated, Aircraft, General Specification For

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Oklahoma City Air Logistics Center/TICLA,, Tinker AFB, OK 73145-5990 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 6620

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:13Z
Check the source to verify that this is the current version before use.

MIL-I-6599 Indicator, Rate Of Flow, Fuel, Type A-19

STANDARDS

MILITARY

MIL-STD-129	Marking For Shipment And Storage
MIL-STD-130	Identification Marking Of U.S. Military Property
MIL-STD-781	Reliability Tests, Exponential Distribution
MIL-STD-810C	Environmental Testing Methods
MIL-STD-2073-1	DOD Material Procedures For Development And Application Of Packaging

AIR FORCE-NAVY AERONAUTICAL

AND10050 Bosses, Standard Dimensions For Gasket Seal Straight Thread

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Document Order Desk, Bldg 4D, 700 Robbins Avenue, Building #4, Section D, Philadelphia, PA 19111-5094.)

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

American Society For Testing And Materials (ASTM)
ASTM D910 Gasoline, Aviation

(Application for copies should be addressed to: ASTM, 1916 Race Street, Philadelphia, PA 19103.)

(Non-Government Standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated detail specifications, specification sheets, or MS standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.3), a sample shall be subjected to first article inspection (see 6.4) in accordance with 4.2.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:13Z
Check the source to verify that this is the current version before use.

3.3 Design and construction.

3.3.1 Fuel Flow. Unless otherwise specified, the fuel flow rate transmitter shall be calibrated for rate of flow in pounds per hour of aviation fuel which meet the requirements of ASTM D910. The specific gravity of fuel shall be 0.77 ± 0.005 at 15.6°C.

3.3.1.1 Calibration. The calibration of the transmitter shall be such that it will satisfactorily operate with a type A-19 indicator conforming to MIL-I-6599.

3.3.1.2 The synchro in the rate-of-flow transmitter shall be at electrical zero per MIL-T-5350 at a flow rate of 2062.5 pounds per hour.

3.3.2 Temperature range. The transmitter shall be designed to withstand an ambient operating temperature range of -55° to +121° C with fuel flowing through the transmitter and exposure to +190 C with no fuel flow.

3.3.3 Damping. The transmitter shall be provided with suitable damping.

3.3.4 Lock wire. The transmitter body screws shall be safetied with stainless steel lock wire. Not more than three screws shall be safetied with one length of wire. The lock wire shall be twisted tight between each pair of screws. Suitable lockwashers in place of lock wire may be used , where necessary.

3.3.5 Mounting. Mounting bosses and spacing thereof shall be as specified in FIGURE 1.

3.3.6 Caps. The fuel line connections shall be furnished with caps or plugs to prevent foreign material from entering the transmitter.

3.3.7 Dimensions. The outline dimensions of the transmitter shall conform to FIGURE 1. Connection bosses shall conform to AND10050 for one inch outside diameter tubing.

3.3.8 Synchro housing material. The housing for the synchro used in this transmitter shall be made from an austenitic stainless steel having a Brinell Hardness of 150 or more. The term "housing" includes all parts which incorporate supports for rotor shaft bearings.


3.3.9 Reliability program. The contractor shall establish a eligibility program as necessary to meet the reliability requirements specified herein.

3.3.9.1 Reliability. The transmitter shall have a mean-time-between-failures (MTBF) of 1200 hours demonstrated to a 90 percent confidence level.

3.3.9.2 Longevity. The transmitter shall be an operating life span (equipment longevity as defined in MIL-STD-781) of not less than 2500 hours before wearout failures occur or the transmitter consistently
fails to meet the specific MTBF index. Parts requiring replacement within this period of time and the normal operating period of such parts shall be reported by the contractor to the procuring activity.

3.4 Weight. The weight of the complete fuel flow rate transmitter shall not exceed 5.75 pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:13Z
Check the source to verify that this is the current version before use.

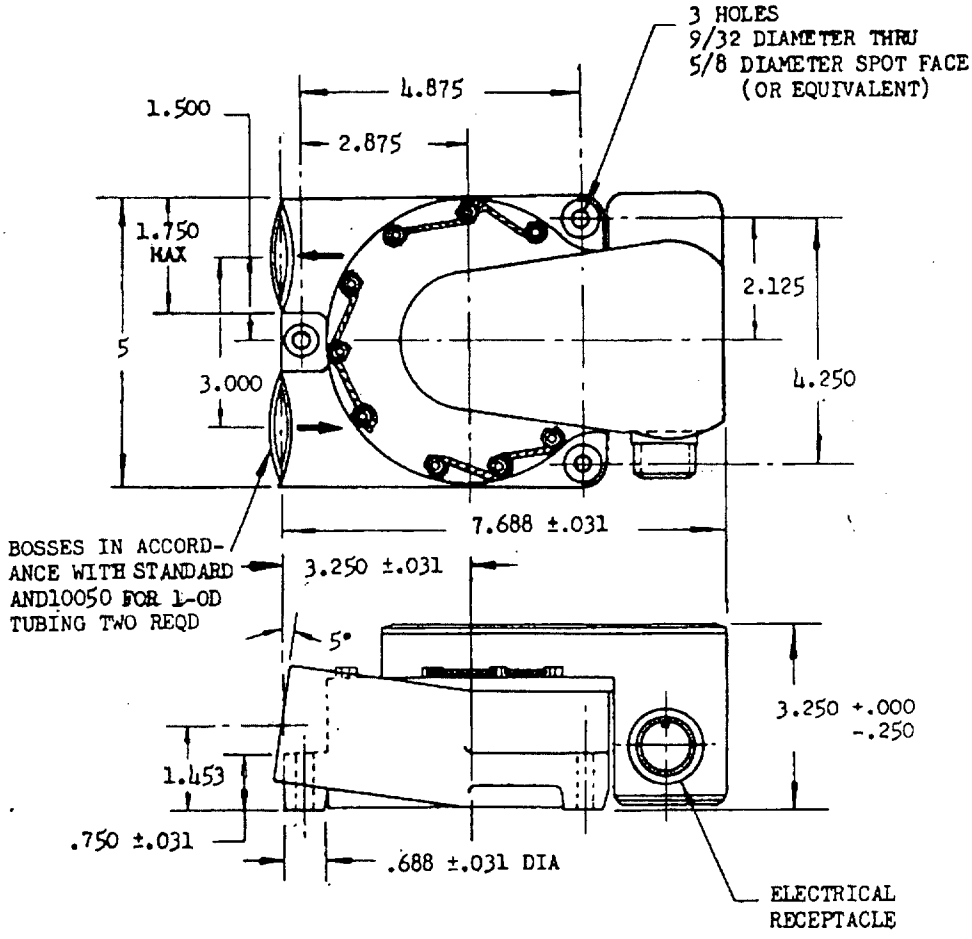

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005
ANGLES ±1 .

FIGURE 1. Flowmeter transmitter .

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:13Z
Check the source to verify that this is the current version before use.

3.5 Rust inhibitor. A rust inhibitor of a quality and type acceptable tot he procuring activity shall be placed in the metering chamber of each transmitter, prior to sealing for shipment.

3.6 Markings. The direction of fuel flow through the transmitter shall be permanently and legibly marked by a raised cast arrow as shown of FIGURE 1, on both top and bottom.

3.7 Identification of product. Equipment assemblies, and parts shall be marked for identification in accordance with Standard MIL-STD-130.

3.8 Cadmium. Cadmium is not to be used in the transmitter unless approved by the preparing activity. There shall be no cadmium used on the exterior of the transmitter. The fluid whose flow rate is being measured by the transmitter shall not come into contact with and cadmium.

3.9 Reclaimed materials. The use of reclaimed materials are encouraged to the maximum extent possible.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 General specification. The quality assurance provisions shall be in accordance with section 4 of MIL-T-5350, and as specified herein.

4.2.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2.2)

b. Quality conformance inspection (see 4.3).

4.2.2 First article inspection.

4.2.2.1 Test samples. The qualification inspection samples shall consist of at least seven transmitters representative of the production equipment. The samples shall be identified with the manufacturer's part number.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:13Z
Check the source to verify that this is the current version before use.

4.2.2.2 First article inspection tests. The first article inspection tests shall consist of all the tests of this specification. Three of the samples shall be subjected to the sampling. Plan A and sampling plan B tests and seven samples (may include the three subjected to the sampling plans A and B tests) shall be subjected to the sampling plan C tests. Unless otherwise specified by the qualifying activity, tests shall be performed in the order listed.

4.3 Quality conformance inspection. The quality conformance inspection shall consist of individual tests and sampling plans and tests (see 4.3.1 and 4.3.2).

4.3.1 Individual tests. Each transmitter shall be subjected tot he following tests.

a. Individual tests as specified in MIL-T-5350 except the sealing tests.

b. Leak test (4.5.3)

4.3.2 Sampling plans and tests.

4.3.2.1 Sampling plan A.

a. Sampling plan A tests as specified in MIL-T-5350, except the high temperature test.

b. High temperature (4.5.5)

4.3.2.2 Sampling plan B.

a. Sampling plan B tests as specified in MIL-T-5350, except the altitude, seasoning, and damping tests.

b. Pressure drop (4.5.9)

c. Substitute fuel (4.5.10)

d. Bypass valve (4.5.11)

e. Vibration-resonant and frequency (4.5.12)

4.3.2.3 Sampling plan C. Seven transmitters shall be selected at random from the first 14 procured and subjected to the following tests as described under 4.5 Rejection for reliability shall be in accordance with 4.5.13.6.

a. Individual tests

b. Reliability
c. Longevity

4.4 First article testing.

4.5 Test methods.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:13Z
Check the source to verify that this is the current version before use.

4.5.1 Scale error and friction. Scale error of the transmitter shall be determined at 200 pounds per hour and at every other test flow rate specified in TABLE I with both increasing and decreasing rates of flow. The flow with an increasing rate shall be measured by bringing the flow up to, but not exceeding the specified rate. With a decreasing rate, the flow shall be brought down to, but not below the specified rate. During this test, the brought down to, but not below the specified rate. During this test, the transmitter shall be vibrated at a frequency of 3,600 cycles per minute (cpm) with an amplitude not to exceed 0.002 inch. The scale errors shall not exceed the tolerances at room temperature specified in TABLE I. The difference between the reading on increasing rate of flow and the reading on decreasing rate of flow at each test point shall not exceed the values specified in TABLE II.

4.5.2 Position error. Readings of the master indictor shall be recorded with transmitter in any position but the normal position, and shall not differ from the readings while the transmitter is in normal position by more than the values specified in TABLE II. This test may be combined with the test specified in 4.5.1.

4.5.3 Leak. The transmitter shall be tested for leaks by applying a nonshock hydraulic pressure of 1,600 pounds per square inch (psi) to the inlet connection with the outlet connection bled free of air and capped. The 1,600-psi pressure shall be rapidly applied five times at room temperature. After the last application of pressure, there shall be no indication of leaks for a period of five minutes as shown by a pressure gage readable to 10 psi, or as shown by visual leakage of a colored test fluid. The temperature of the transmitter shall then be reduced to -54° ±2°C by submersion in a cold liquid bath already at this temperature for a period of not less than 15 minutes. While at this temperature, an 800-psi test pressure shall be rapidly applied five times. After the last application of pressure, there shall be no evidence of leaks for a period of five minutes at detected by the same means used for the room temperature portion of this test.

4.5.3.1 Cooling. As an alternate method of cooling, the transmitter may be placed in an ambient temperature of -54° ±2°C for a period of not less than three hours prior to performing the specified tests.

4.5.4 Low temperature. The transmitter shall be subjected to the low temperature test of MIL-T-5350. Tolerances shall be as specified in TABLES I and II.

4.5.5 High temperature. The transmitter shall be subjected to an ambient temperature of 121° ±2°C for a period of four hours with fuel in the instrument but not flowing. During the last 30 minutes of this period, fuel at 38° ±2°C shall be pumped through the transmitter at a rate of 1,000 pounds per hour. The transmitter shall then be tested for scale errors and friction under the same conditions. The scale errors and friction shall not exceed the tolerances specified in TABLES I and II.

4.5.6 Vibration. The transmitter shall be subjected to vibration for a total of three hours on a suitably designed vibration stand at a total excursion of not less than 0.060 nor more than 0.070 inch. The vibration shall be such that the transmitter motion shall be sinusoidal in a plane inclined 45 degrees to the plane of the mounting studs. The frequency of vibration shall be 2,000 cpm. Following the vibration period, the transmitter shall be tested for scale error and friction as specified in 4.5.1.

4.5.6.1 Pointer oscillation. The transmitter shall be subjected to the vibration specified in 4.5.6. The frequency of vibration shall be varied gradually from 1,000 to 3,000 cpm while the fuel flow is slowly varied through the scale range to determine the magnitude of pointer oscillation and variation on a

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:13Z
Check the source to verify that this is the current version before use.

standard single synchro indicator connected electrically to the transmitter. The magnitude of pointer oscillation and
variation shall not exceed the values specified in TABLE II. This test may be combined with the test specified in 4.5.6.

TABLE I

Fuel flow (pounds per hour)	Fuel flow rate transmitter scale error tolerances		
	Tolerance (pounds per hour)		
	Room temp	High temp	Low temp and substitute fuel
200	25	40	50
300	20	30	40
600	20	30	40
900	20	30	40
1,200	20	30	40
1,500	25	40	50
1,800	40	60	70
2,100	40	60	70
2,400	50	75	80
2,700	50	75	80
3,000	60	90	90
4,000	250	400	400
5,000	250	400	400
6,000	250	400	400
7,000	300	450	450
8,000	300	450	450
9,000	400	600	600
10,000	450	650	650
11,000	500	750	750
12,000	600	900	900

4.5.7 Extreme temperature exposure.

4.5.7.1 Low-temperature exposure. The transmitter shall be subjected to the low-temperature exposure test of MIL-T-5350, except that the temperature of both the fuel and the transmitter after the 48-hour period shall be brought up to -54° ±1°C. The scale errors and friction, while at this temperature, shall not exceed the tolerances specified in TABLES I and II.

4.5.7.2 High-temperature exposure. The transmitter shall be subjected to an ambient temperature of 121° ±2°C for a period of 4 hours, with fuel in the instrument, but not flowing. The ambient temperature of the transmitter shall then be raised to 190° ±2°C in a period of approximately 10 minutes and reduced from 190° to 121° ±2°C in approximately a 10-minutes period. The complete cycle shall be repeated six times. After the temperature cycling, the transmitter shall pass the test specified in 4.5.5.

4.5.8 Endurance. The transmitter shall be subjected to 60,000 applications of flow to produce an indication from 0 to 80 ±5 percent of the range of the transmitter and back to zero at a rate of 15 ± 10

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:13Z
Check the source to verify that this is the current version before use.

cpm. The scale error and friction test (4.5.1) shall be conducted in not less than one hour after the completion of
the endurance cycling, and the transmitter shall not exceed the tolerances specified in TABLE I by more than 20 pounds per hour in the low range, and 160 pounds per hour in the upper range.

TABLE II

Pointer error and friction loss tolerances		
	Tolerance (pounds per hour)	
Test	200-3,000 scale	3,000-12,000 scale
Position error	20	120
Friction		
Room temperature	12.5	100
High temperature	12.5	100
Low temperature	25	200
Vibration		
Pointer oscillation	30	180
Pointer variation	12.5	100

4.5.8.1 Scale error and friction after environmental test. The test specified in 4.5.1 shall be performed after all environmental tests are completed, but before the tests specified in 4.5.8 is run. The tolerance specified in TABLES I and II shall apply.

4.5.9 Pressure drop. The pressure drops within the transmitter for rates of flow specified shall be tested and shall not exceed the tolerances specified in TABLE III.

TABLE III

Pressure drop tolerances		
	Maximum allowable pressure (psi)	
Flow rate (pounds per hour)	Normal	Blocked vane
6,000	1.5	5.5
8,000	2.5	6.5
12,000	5.0	11.0
15,000	7.0	15.0

4.5.10 Substitute fuel. The transmitter shall be subjected to the scale error and friction test specified in 4.5.1, except that the fuel used shall be in accordance with ASTM D910, and the specific gravity shall be 0.720 ±0.005 at room temperature. The scale errors shall not exceed the tolerances specified in TABLE I.

4.5.11 Bypass valve. The pressure drop, with the transmitter movable element locked in the zero flow position, shall be measured by any suitable method and shall not exceed the values specified in TABLE III.

4.5.12 Vibration. The transmitter shall be subjected to a vibration test in accordance with method 514.2, Procedure I, Part 1, Category b.1, Curve D of MIL-STD810C. When resonant frequencies are not

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:13Z
Check the source to verify that this is the current version before use.

apparent within the specified frequency range, the transmitter shall be vibrated for periods twice as long at a frequency of 55 HZ and an applied double amplitude at 0.60 inch. No damage shall result from this test.

TABLE IV

Vibration Technique		
Frequency (cps ± 10 percent)	Double amplitude (inches ± 10 percent) 1\	Time each axis (minutes)
120	0.013	10
185	0.0055	10
250	0.0029	10
315	0.0018	10
380	0.0012	10
445	0.0009	10

1/ The amplitude shown corresponds to an acceleration of 10g.

4.5.12.1 The transmitter shall be vibrated in accordance with the technique specified in Table IV, through each of three mutually perpendicular axes of vibration. Following vibration period, the transmitter shall pass tests specified in 4.5.1 and 4.5.3.

4.5.13 Reliability. The seven transmitters shall be subjected to a reliability test in accordance with MIL-STD-781, test level G, test plan I, which shall demonstrate a minimum acceptable MTBF of 1200 hours to a 90 percent confidence level.

4.5.13.1 Test equipment. Test equipment and fixtures shall include provisions for transmitter operation, temperature cycling, and vibration.

4.5.13.2 Operation. During this test, fuel at room temperature shall be flowing through the transmitter at a rate of approximately 6000 pph.

4.5.13.3 Temperature cycling. Unless otherwise specified or amended by the procuring activity due to the results of thermal analysis, the temperature of the chamber in which the transmitter are tested and shall be cycled as follows:

a. Starting at room temperature, decrease temperature to -54°C and stabilize for ½ hour with transmitter unenergized..

b. Turn transmitters on, raise temperature to 95° C, and operate transmitters for 2-½ hours.

c. Turn transmitters off and lower chamber temperature to -54° C for ½ hour.

d. Repeat steps b and c until reliability requirement has been met.

This schedule provides eight 3-hour test cycles for each 24-hour test period. In each 24-hour period the operational test time in 20 hours.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:13Z
Check the source to verify that this is the current version before use.

4.5.13.4 Vibration cycling. Throughout this test, the transmitter shall be vibrated for a period of ten minutes during each hour of on-time at any nonresonant frequency between 20 and 60 Hz.. and at a peak acceleration of 2.2g ±10 percent.

4.5.13.5 Performance check. At each 200-hour interval and at the end of this test, the transmitters shall be subjected to the scale error and friction test. During each test, if any two test points exceed the allowable tolerances for high and low temperatures and substitute fuel specified in TABLES I and II, one failure shall be charged against this test.

4.5.13.6 Failure criteria. For an accept decision, each transmitter shall be operated at least 1000 hours. If a transmitter fails, entries shall be made on the appropriate data logs and the failed equipment shall be removed from the test and repaired with minimum interruption of the transmitter still under test. The procuring activity shall be immediately notified of the failure and the plan for correcting the deficiency. A detailed analysis of the failure will be submitted as soon as it has been completed. No more than a total of 12 failures will be permitted during this test. Acceptance shall be based on the accept-reject criteria specified in MIL-STD-781, paragraph entitled "Accept-Reject Criteria for: Test Plan".

4.5.13.7 Reporting. Reports shall be submitted in accordance with MIL-STD-781. The reliability test log and failure summary and analysis shall be included in the final test report.

4.5.14 Longevity. Testing on two of the seven reliability test samples shall be continued through a longevity test in accordance with MIL-STD-781, test plan XXVIII, until 2500 hours have accumulated on each of the two transmitters.

4.6 Preparation for delivery. Test of preservation, packaging, and packing shall be accomplished in accordance with section 4 of MIL-P-116, to ensure compliance with section 5 of this specification.

4.7 Inspection of packaging. Except when commercial packaging is specified, the sampling and inspection of the preservation and interior package marking shall be in accordance with groups A and B quality conformance inspection requirements of MIL-P-116. The sampling and inspection of the packing for shipment and storage shall be in accordance with the quality assurance provisions of the applicable container specification shown in section 5. The inspection of marking for shipment and storage shall be in accordance with MIL-STD-129. The inspection of commercial packaging shall be as specified in the contract (see 6.2).

5. PACKAGING

5.1 Preservation. Preservation shall be level "A" or "C" as specified (see 6.2).

5.1.1 Preservation-packaging. Unless otherwise specified by the contracting activity, item shall be packaged in Quantity Unit Pack (QUP) of one each. Each item will be provided a preservation method IC-1 in accordance with MIL-P-116.

5.1.2 Cleaning. Indicator shall be cleaned in accordance with process C-1 of MIL-P-116 C-1 process.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:13Z
Check the source to verify that this is the current version before use.

5.1.3 Drying. Immediately after cleaning, the item shall be dried following any one or combination of the drying procedures listed in MIL-P-116. The drying procedures employed shall not be injurious to the item.

5.1.4 Level A. Item shall be preserved in accordance with MIL-P-116 and MIL-STD-2073-1 to provide a method IC-1.

5.1.5 Level C. Item shall be individually preserved in a manner that will afford adequate protection against corrosion, deterioration, and physical damage during shipment from the supply source to the first receiving activity as specified in MIL-P-116 and MIL-STD-2073-1.

5.2 Packing. Packing shall be level "A," "B," or "C" as specified (see 6.2).

5.2.1 Container-cushioning. Unit container requirements shall conform to MIL-B-121, barrier material, unless otherwise specified by the contracting activity. Unit container shall be large enough to allow for the application of cushioning/wrap material, of sufficient density and thickness, to protect the unit container from punctures. Intermediate/shipping containers shall be large enough to allow for the application of sufficient cushioning material, between the unit container and intermediate/shipping container. Cushioning material shall be of sufficient density and thickness to ensure shock transmission does not exceed peak values in "G's" established for the item.

5.2.2 Level A. Fiberboard containers do not meet level "A" container criteria.

5.2.3 Level B. Item will be preserved as specified in 5.1 and shall be packed in exterior containers conforming to PPP-B-1672, weather-resistant unless otherwise specified by the contracting activity. Exterior container shall be uniform shape, size, and minimum tare and cube, consistent with the protection required. Closure shall be IAW appropriate PPP-B-1672 procedures as specified, and contracting activity.

5.2.4 Level C. Item will be packed in such a manner that will afford adequate protection against physical damage during direct domestic shipment from the supply source to the first receiving activity. These packs shall conform to MIL-STD-2073-1.

5.3 Marking. Unit, intermediate, and exterior containers shall be marked IAW special markings required by the contracting activity, SPI and MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The type J-6A fuel flowmeter transmitter covered by this specification is intended to indicate the rate of flow of fuel in pounds per hour being consumed by an aircraft jet engine in conjunction with a suitable indicator.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of the specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:13Z
Check the source to verify that this is the current version before use.

b. Levels of packaging and packing required (see 5.1 and 5.2.3)

c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1).

6.3 First article. A first article is required for inspection and approval (see 3.1 and 4.2.2).

6.4 First article inspection. When the first article inspection is required, the contracting officer should provide specific guidance to offeror's whether the item(s) should be a preproduction sample, a first article sample, a first production item, a sample selected from the first production items, or a standard production item from the contractor's current inventory (see 3.1) and the number of item(s) to be tested as specified in 4.2.2.

6.5 Subject term (key words) listing. Recommended key words are:

Rate of Flow
Fuel
Synchro-style
Transmitter

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Air Force - 99
Navy - AS

Preparing activity:
Air Force - 71

Project number:
6620-0504

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:13Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-T-6598F	94/10/15

3. DOCUMENT TITLE
Transmitter, Rate Of Flow Fuel, Synchro Style

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
OC-ALC/TICLA	405-736-5960	336-5960
c. ADDRESS (Include Zip Code) 3001 Staff Drive Tinker AFB, OK 73145-5990	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://docs.dla.mil -- Downloaded: 2026-10-17T07:13Z
Check the source to verify that this is the current version before use.