MIL–U–6632B
5 JULY 1961
SUPERSEDING
MIL–U–6632A(USAF)
14 DECEMBER 1956

MILITARY SPECIFICATION

URINALS, STATIONARY, AIRCRAFT

This specification has been approved by the Department of Defense and is mandatory for use by the Departments of the Army, the Navy, and the Air Force.

1. SCOPE

1.1 This specification covers two types of urinals for installation in aircraft.

Type I —Without a pressurized drain valve.

Type II—With a pressurized drain valve.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

PPP–B–566 — Boxes; Folding, Paperboard.

PPP–B–591 — Boxes, Fiberboard, Wood-Cleated.

PPP–B–601 — Boxes, Wood, Cleated-Plywood.

PPP–B–621 — Boxes, Wood, Nailed and Lock-Corner.

PPP–B–665 — Boxes, Paperboard, Metal Stayed (Including Stay Material).

PPP–B–636 — Boxes, Fiberboard.

PPP–B–676 — Boxes, Set-Up, Paperboard.

PPP–T–60 — Tape, Pressure Sensitive Adhesive, Waterproof for Packaging and Sealing.

MILITARY

JAN–P–100 — Packaging and Packing for Overseas Shipment, General Specification.

MIL–P–116 — Preservation, Methods of.

MIL–R–3065 — Rubber, Fabricated Parts.

MIL–V–6613 — Valve, Y, Urinal, Pressurized Aircraft.

MIL–R–6855 — Rubbers; Synthetic, Sheet, Molded and Extruded, for Aircraft Application.

MIL–E–7729 — Enamel, Gloss Aircraft Application.

MIL–C–8514 — Coatings, Compound, Metal Pretreatment, Resin Acid.

MIL–P–8585 — Primer Coating, Zinc Chromate, Low Moisture-Sensitivity.

MIL–A–8625 — Anodic Coatings, for Aluminum and Aluminum Alloys.

611056—61—(17)

FSC 4510

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:16Z
Check the source to verify that this is the current version before use.

MIL-L-10547 — Liners, Case, Waterproof.
MIL-D-70327 — Drawings, Engineering and Associated List.

STANDARDS

FEDERAL

FED-STD-595 — Colors.

MILITARY

MIL-STD-105 — Sampling Procedure and Tables for Inspection by Attributes.
MIL-STD-129 — Marking for Shipment and Storage.
MIL-STD-130 — Identification Marking of U. S. Military Property.

(Copies of documents required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials.

3.1.1 *General.* Except for the gasket, latch, roller, drain screen, and other small pieces of hardware, urinals shall be constructed of aluminum. The gasket shall be made of neoprene conforming to MIL-R-6855 or MIL-R-3065. Miscellaneous hardware shall be of rust-resistant metals.

3.2 Design. The design of the urinal shall conform to the design shown in figures 1 and 2 when applicable. Each urinal shall have a body and a cover. The cover shall hinge to body and shall open upward. A spring loaded catch shall be provided to hold the cover closed. A synthetic rubber gasket shall be provided on the rim of the body under the cover to minimize vibration, noise, and damage to finish. A drain screen shall be provided inside of the urinal to prevent clogging of the outlet.

3.3 Performance.

3.3.1 *Capacity.* When in the mounted position, and filled to the lip, the urinal shall have a capacity of not less than 70 cubic inches.

3.3.2 *Drainage time.* The time required to drain the full urinal shall not exceed 50 seconds.

3.3.3 *Strength.* With the cover closed, the urinal shall show no signs of failure or deformation when tested as specified in paragraph 4.4.3.

3.3.4 *Cover opening force.* The force required to open the cover shall not be more than 4 pounds when tested as specified in paragraph 4.4.3.1.

3.4 Interchaneability. The drawing number requirements of MIL-D-70327 shall govern changes in the manufacturer's part numbers.

3.5 Dimensions. The dimensions shall be as shown in figures 1 and 2.

3.6 Weight. The complete urinal assembly shall not weigh more than 1.2 pounds.

3.7 Finish. The urinal shall be anodized in accordance with MIL-A-8625, treated with one coat of pre-treatment coating MIL-C-8514, finished both on the inside and outside with one coat of Primer coating, zinc chromate in accordance with MIL-P-8585, and two coats of white enamel in accordance with MIL-E-7729, Type II or III, Federal Standard 595 Color No. 17875.

3.8 Identification. Urinals shall be marked for identification in accordance with MIL-STD-130.

3.9 Workmanship. The urinals shall be free from any defects which might affect appearance, proper functioning and hinder functional characteristics.

4. QUALITY ASSURANCE PROVISIONS

4.1 The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:16Z
Check the source to verify that this is the current version before use.

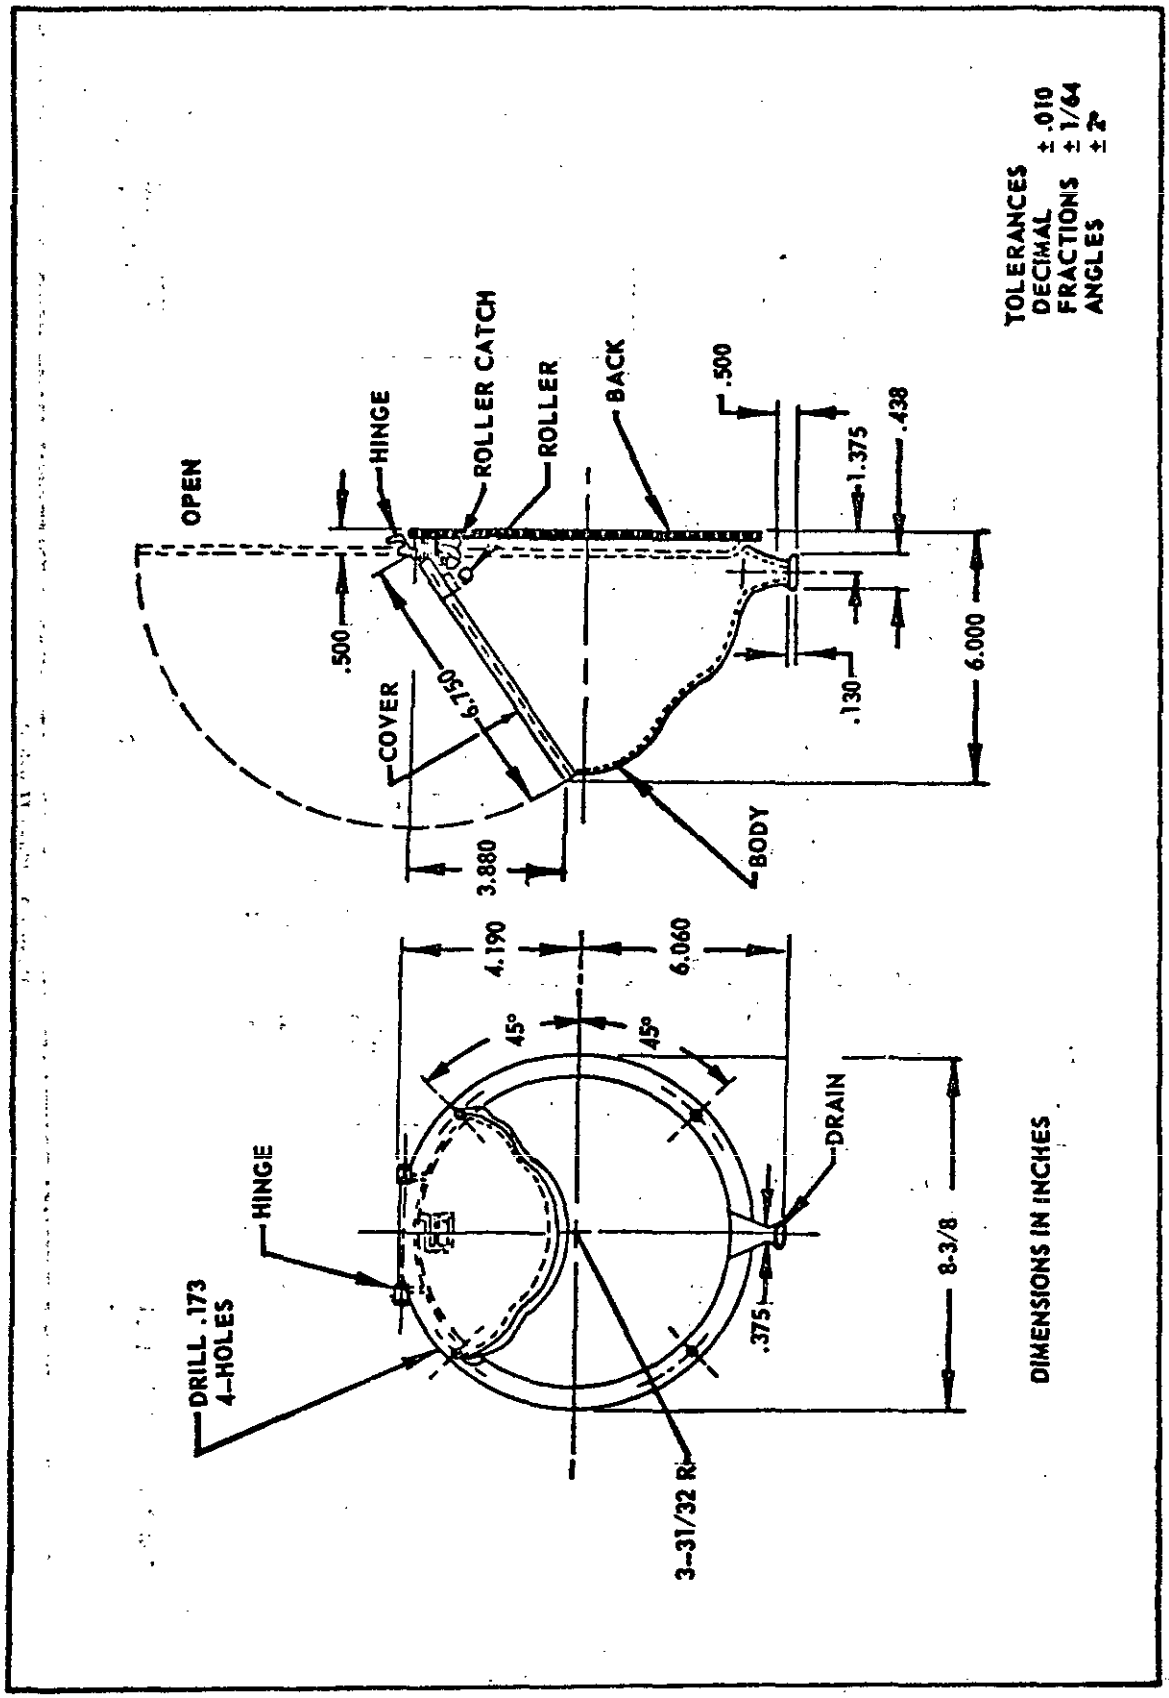


FIGURE 1. *Type I urinal.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:16Z
Check the source to verify that this is the current version before use.

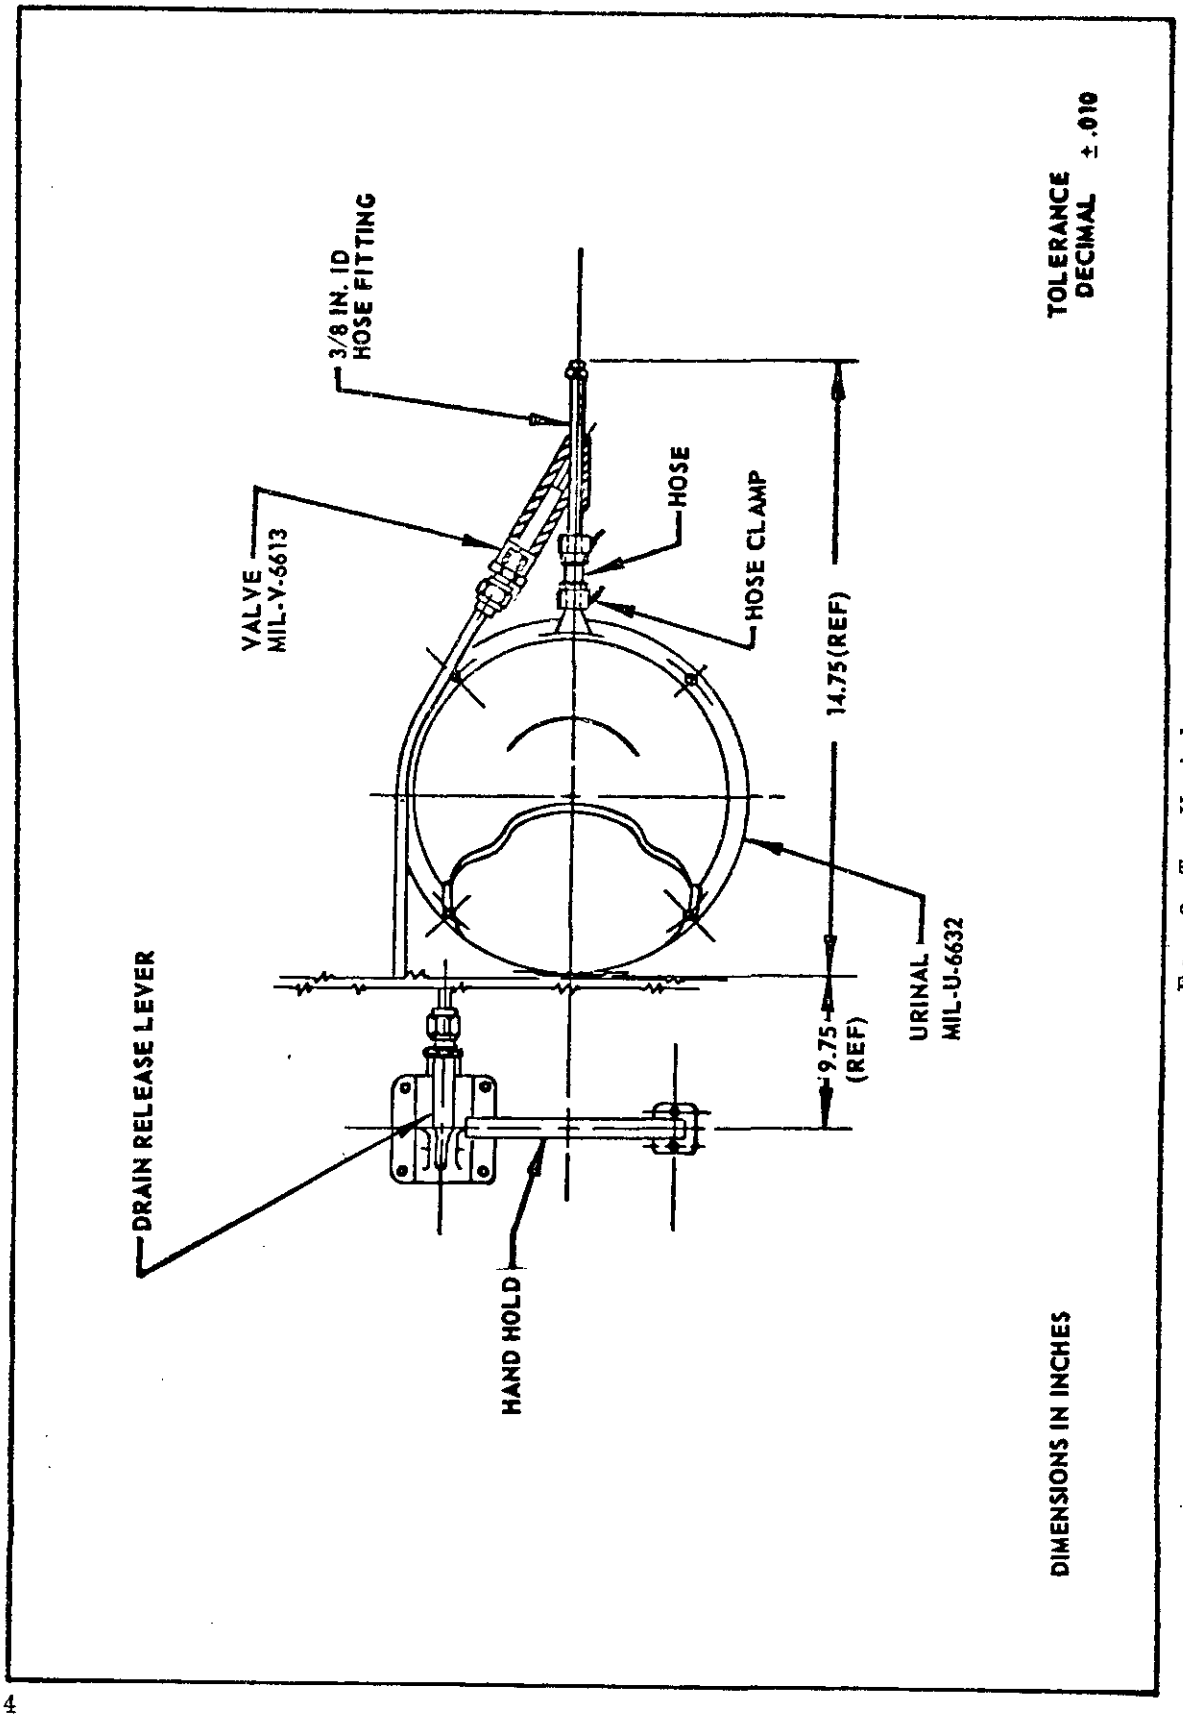


FIGURE 2. *Type II urinal.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:16Z
Check the source to verify that this is the current version before use.

4.2 Acceptance inspection. Acceptance inspection of urinals shall be based on examination of product, and acceptance tests.

4.2.1 *Examination of products.* Each urinal shall be subjected to the inspection described in 4.4.1 of this specification.

4.2.2 *Acceptance tests.* Acceptance tests shall consist of all the tests specified herein under test methods (4.4.2).

4.3 Sampling for acceptance tests.

4.3.1 *For conformance with figures.* Sampling for conformance with figures shall be in accordance with Standard MIL–STD–105, Inspection Level II, 1.5% AQL. Each unit in the sample shall be subjected to the test specified in 4.4.2.1.

4.3.2 *For performance.* Sampling for capacity, draining time, strength, and cover opening force shall be in accordance with Standard MIL–STD–105, Inspection Level L–6, and an AQL of 6.5% for all defects. Each unit in the sample shall be subjected to the tests specified in 4.4.2.2, 4.4.2.3, 4.4.2.4, and 4.4.2.5.

4.3.3 *Rejection and retests.* For examination of product each nonconforming urinal shall be rejected. For sampling tests resubmission of rejected lots shall be in accordance with MIL–STD–105.

4.4 Examination and tests.

4.4.1 *Examination of product.* Each urinal shall be inspected to determine conformance with the requirements specified in paragraphs 3.1, 3.2, 3.4, 3.8 and 3.9 of this specification.

4.4.2 *Test methods.*

4.4.2.1 *Conformance to figures.* Each unit of the sample, selected in accordance with 4.3.1, shall be inspected for strict conformance with the requirements specified in paragraphs 3.5, 3.6, and 3.7 of this specification.

4.4.2.2 *Capacity.* With the sample urinals, selected in accordance with 4.3.2, mounted in a position identical to the actual installation and filled to the lip, they shall comply with capacity as specified in paragraph 3.3.1.

4.4.2.3 *Drainage time.* With the drain valve closed each urinal sample unit shall be filled with 70 cubic inches of water. The drain valve shall then be opened and the entire contents shall drain in not more than 50 seconds.

4.4.2.4 *Strength.* With the cover closed, and a vacuum of 12 pounds per square inch applied to the outlet of each urinal sample unit, there shall be no failure of urinal assembly, or deformation.

4.4.2.5 *Cover opening force.* With a vacuum of 12 pounds per square inch applies, the force required to open the cover of each sample unit shall not exceed that specified in 3.3.4.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 *Level A.* Each urinal shall be packaged Method III, in accordance with the requirements of specification MIL–P–116, in unit container conforming to specification PPP–B–566, PPP–B–665 or PPP–B–676.

5.1.2 *Level C.* Urinals shall be packaged in a way which will afford adequate protection against deterioration and physical damage during shipment from supply source to the first receiving activity for immediate use.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 *Level A.* Urinals packaged as specified in 5.1.1 shall be packed in overseas type exterior shipping containers conforming to specification PPP–B–591, PPP–B–601, PPP–B–621 or PPP–B–636. Containers shall be of uniform shape and size, be of minimum cube and tare consistent with the protection required and shall contain identical quantities. Containers shall be provided with a case liner conforming to Specification MIL–L–10547 and shall be sealed in accordance with the appendix thereto. Containers shall be closed and strapped in accordance with the applicable container specification or appendix thereto. The case liner will not be required for PPP–B–636, Type 1 or 2, class 2 and is sealed at all joints and seams including manufacturer's

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:16Z
Check the source to verify that this is the current version before use.

joints, with tape conforming to Specification PPP-T-60, Type I or II, class I.

5.2.2 *Level B.* Urinals packaged as specified in 5.1.1 shall be packed in domestic type exterior shipping containers conforming to specification PPP-B-591, PPP-B-601, PPP-B-621 or PPP-B-636. Containers shall be of uniform shape and size, be of minimum cube and tare consistent with the protection required and shall contain identical quantities. Containers shall be closed and strapped in accordance with the applicable container specification or appendix thereto.

5.2.3 *Level C.* Urinals shall be packaged in a way which will afford protection against damage during direct shipment from the supply source to the first receiving activity or immediate use. Containers shall meet consolidated freight classification rules or regulations of other common carriers as applicable to the mode of transportation.

5.3 Physical protection. Cushioning, blocking and bracing shall be in accordance with JAN-P-100 except that for domestic shipment, waterproofing requirements for cushioning materials and containers shall be waived. Drop tests of JAN-P-100 shall be waived when packaging and packing of the item are for immediate use or when drop tests of MIL-P-116 are applicable.

5.4 Marking. In addition to any special marking required by the contract or order, interior and exterior containers shall be marked in accordance with the requirements of Standard MIL-STD-129.

6. NOTES

6.1 Intended use. This urinal is intended for use in both pressurized and nonpressurized aircraft. The use of this urinal in pressurized aircraft requires the use of a valve conforming to MIL-V-6613, as shown in figure 2 of this specification. In case the urinal is not drained overboard from pressurized aircraft the valve is not required.

6.2 Ordering data. Procurement document should specify the following:

(a) Title, number, and date of this specification.

(b) Selection of applicable levels of preservation and packaging, and packing.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodians:

Navy—Wep
Army—TC
Air Force—MOA

Preparing activity:

Air Force—MOA

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:16Z
Check the source to verify that this is the current version before use.