
COMMERCIAL ITEM DESCRIPTION

FUSE, CARTRIDGE, TYPE SFE

The General Services Administration has authorized the use of this commercial item description (CID).

Abstract. This CID covers the general requirements for an SFE type fuse cartridge. Fuse cartridges covered by this CID are intended for commercial/industrial applications and shall not be used in military systems needing stringent environmental and electrical requirements.

Part or Identifying Number (PIN). The PIN for the CID shall be as shown in the following example:

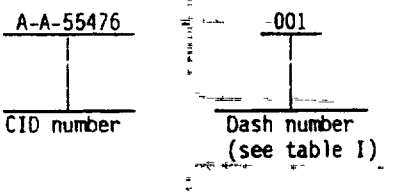

Salient characteristics.

Design and construction. Fuse cartridges supplied to this CID shall be as specified herein and shall meet the requirements of SAE J554 for SFE type fuse cartridges (see figure 1).

Ampere rating The ampere rating shall be as specified in table I

Voltage rating. The voltage rating shall be 32 V dc

Marking. Fuse cartridges supplied to this CID shall be marked with the manufacturer's standard commercial PIN.

Fuse body. The fuse body shall be glass.


Opening time. The opening time shall be as specified in table II.

Corresponding fuseholder. The corresponding fuseholder is specified in A-A-55475.

Regulatory requirements. This section is not applicable to this CID.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

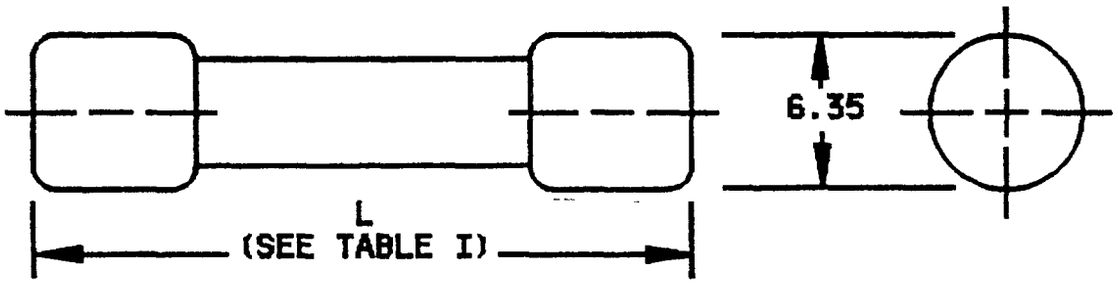

mm	Inches
6.35	.250

NOTES:
1. Dimensions are in millimeters.
2. Tolerance is ±0.13 millimeter (0.005 inch).
3. This item was designed using inch-pound units of measurement. In case of problems involving conflicts between the metric and inch-pound units, the inch-pound units shall rule.

Figure 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

CID PIN A-A-55476-	Ampere rating	Fuse dimension L (metric)	Fuse dimension L (inches)
001	4	15.88	.625
002	6	19.05	.750
003	7.5	22.23	.875
004	9	22.23	.875
005	14	26.99	1.062
006	20	31.75	1.250
007	30	36.50	1.437

TABLE II. Percent rated current versus blow time.

Percent rated current	Blow time
110 percent	4 hours, minimum
135 percent	1 hour, maximum
200 percent	10 seconds, maximum

Quality assurance provisions.

Responsibility for inspection. The contractor is responsible for the performance of all inspection, examination, and test requirements specified in the contract or purchase order. The contractor may use his own or any other facilities suitable for inspection requirements specified in the contract or purchase order, unless otherwise disapproved by the acquiring activity. The acquiring activity reserves the right to perform any of the inspections set forth in the contract or purchase order where such inspections, examinations, and tests are deemed necessary to assure supplies and services conform to prescribed requirements.

Contractor certification statement. The contractor shall certify and maintain objective quality evidence that the product offered meets the requirements of this CID, and that the product conforms to the producer's own drawings, specifications, standards, quality assurances practices, and is the same as the product provided as a bid sample. The acquiring activity reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Certificate of compliance. A certificate of compliance shall accompany all fuse cartridges supplied to this CID. The letter of certification shall state that the fuse cartridge conforms to all requirements of this CID.

Packaging.

Preservation, packaging, packing, labeling, and marking. Preservation, packaging, packing, labeling, and marking shall be as specified in the contract or purchase order.

Notes. This section contains relevant information which is useful to buyers, users, and suppliers in the process of acquiring the item, but is not mandatory

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

Ordering data The contract or purchase order shall specify the following:

a CID document number and revision and CID PIN

b Quality assurance provisions

c Packaging requirements

Comments Comments on this CID should be directed to Defense Electronics Supply Center, 1507 Wilmington Pike, ATTN: DESC-EMM, Dayton, OH 45444-5270, or telephone (513) 296-6189, or fax (513) 296-8868.

Suggested sources of supply. Suggested sources of supply are listed herein. Additional sources will be added as they become available.

CID dash number (see table I) A-A-55476-	Vendor commercial PIN CAGE 71400	Vendor commercial PIN CAGE 75915
001	SFE4	307004
002	SFE6	307006
003	SFE7.5	30707.5
004	SFE9	307009
005	SFE14	307014
006	SFE20	307020
007	SFE30	307030

Vendor CAGE number	Vendor name and address
71400	Bussmann P.O. Box 14460 St. Louis, MO 63178-4460 (314) 394-2877
75915	Littelfuse, Incorporated 800 E. Northwest Highway Des Plaines, IL 60016-3096 (312) 824-1188

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

PREPARING ACTIVITY:

DLA-ES

(Project 5920-D211)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.