MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED SHELL, RACK AND PANEL, SHIELD, ROUND CLAMP, NONENVIRONMENTAL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connector described herein shall consist of this specification and the latest issue of MIL-C-24308.

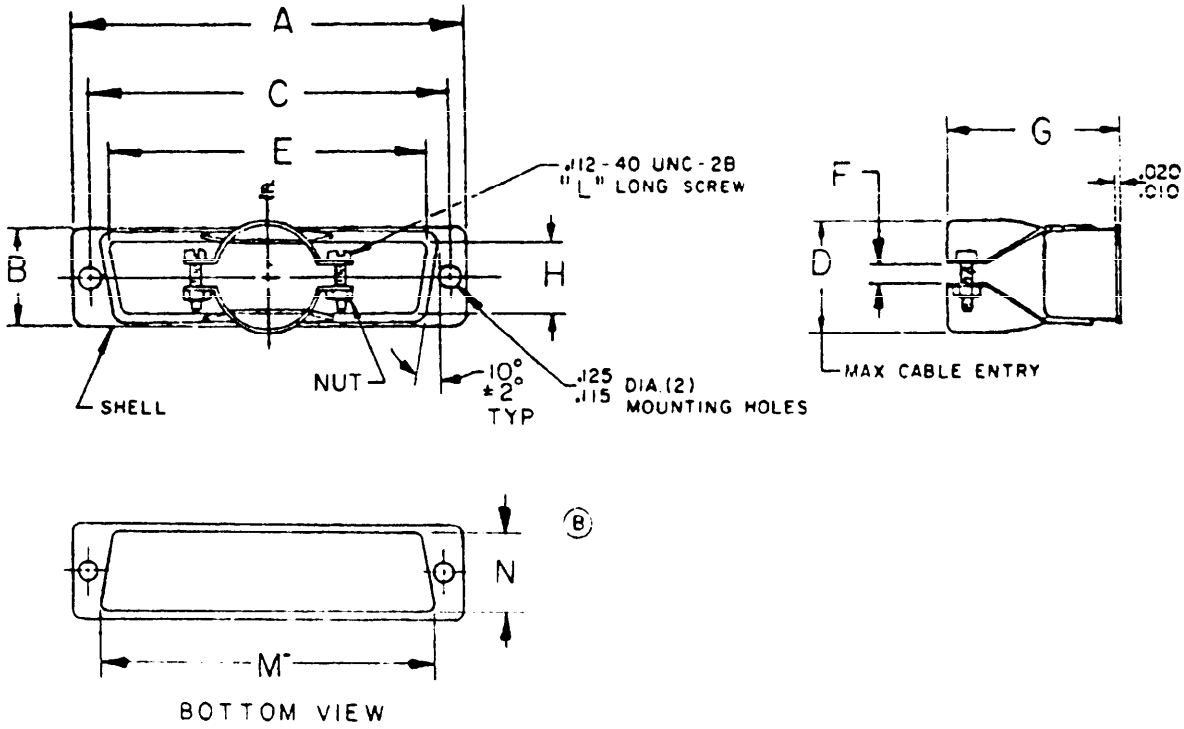


FIGURE 1. Configuration and dimensions.

(B) denotes changes.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 202610-19T21:09Z
Check the source to verify that this is the current version before use.

Part number		Shell size	A	B	C	D	E	F	G	H	L ±.031	M	N
Steel	Nonmagnetic												
M24308/21-1	M24308/21-6	1	1.223 1.193	.515 .485	.989 .979	.406	.676 .646	.140 .110	1.061 1.001	.359 .329	.375	.783 .753	.457 .427
M24308/21-2	M24308/21-7	2	1.546 1.516	.515 .485	1.317 1.307	.406	.999 .969	.140 .110	1.061 1.001	.359 .329	.375	1.106 1.076	.457 .427
M24308/21-3	M24308/21-8	3	2.093 2.063	.515 .485	1.857 1.847	.593	1.530 1.500	.202 .172	1.092 1.032	.359 .329	.375	1.646 1.616	.457 .427
M24308/21-4	M24308/21-9	4	2.733 2.703	.515 .485	2.505 2.495	.718	2.186 2.156	.265 .235	1.092 1.032	.359 .329	.500	2.297 2.267	.457 .427
M24308/21-5	M24308/21-10	5	2.640 2.610	.624 .594	2.411 2.401	.812	2.108 2.078	.327 .297	1.092 1.032	.453 .423	.625	2.220 2.190	.580 .550

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.010	.25	.453	11.51	.989	25.12	1.857	47.17
.020	.51	.457	11.61	.999	25.37	2.063	52.40
.110	2.79	.485	12.32	1.001	25.43	2.078	52.78
.112	2.84	.500	12.70	1.032	26.21	2.093	53.16
.115	2.92	.515	13.08	1.061	26.95	2.108	53.54
.125	3.18	.550	13.97	1.076	27.33	2.156	54.76
.140	3.56	.580	14.73	1.092	27.74	2.186	55.52
.172	4.37	.593	15.06	1.106	28.09	2.190	55.63
.202	5.13	.594	15.09	1.193	30.30	2.220	56.39
.236	5.97	.624	15.85	1.223	31.06	2.267	57.58
.265	6.73	.625	15.88	1.307	33.20	2.297	58.34
.297	7.54	.646	16.41	1.317	33.45	2.401	60.99
.327	8.31	.676	17.17	1.500	38.10	2.411	61.24
.329	8.36	.718	18.24	1.516	38.51	2.495	63.37
.359	9.12	.753	19.13	1.530	38.86	2.505	63.63
.375	9.52	.783	19.89	1.546	39.27	2.610	66.29
.406	10.31	.812	20.62	1.616	41.05	2.640	67.06
.423	10.74	.969	24.61	1.646	41.81	2.703	68.66
.427	10.85	.979	24.87	1.847	46.91	2.733	69.42

Item	Material	Finish
Nut	Steel	Yellow chromate coating over cadmium per QQ-P-416, type I, class 3.
Screw	Low carbon steel per QQ-S-633	
Shell	Low carbon steel per QQ-S-698, Cond. 5	Yellow chromate over cadmium per QQ-P-416 type II, class 2 or zinc per QQ-Z-325, type II, .0002 minimum thickness
	Soft rolled brass per QQ-B-613, comp. 2, temper 1	

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Screws and nuts are shown assembled for reference only and are to be shipped unassembled in a common container with the junction shell.

FIGURE 1. Configuration and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:09Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI, AR, AV
Navy - AS
Air Force - 11, 99
DLA - ES

User activities:
Army - ME, AT
Navy - CG, MC, OS

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5935-3268-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:09Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:09Z
Check the source to verify that this is the current version before use.